

access

LIGHTING

INSTALLATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.


NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation -Disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

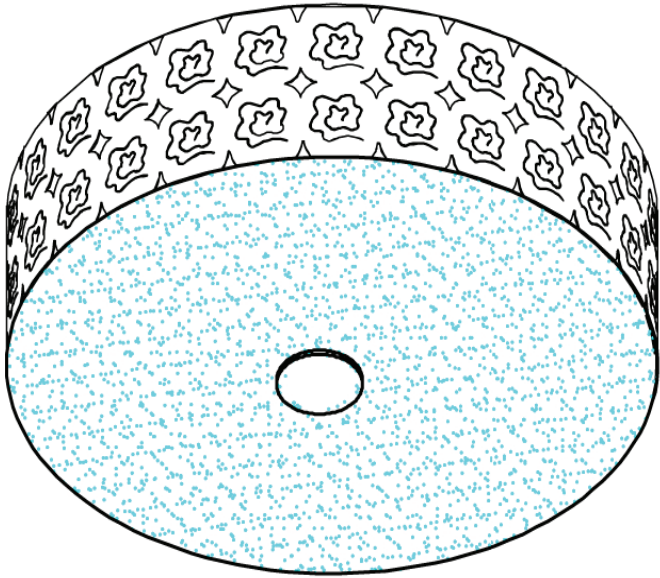


COLLECTION	APPLICATION	MODEL NO.
Lacey	Flush Mount	50993

WHAT WE PROVIDE

- Crossbar in Fixture
- Mounting Hardware
- Glass Plate
- Socket Cluster

WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code
- 3 x 60W A-19 Bulbs

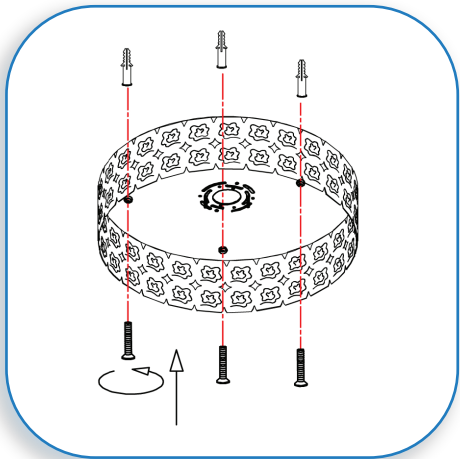

1


MOUNT FIXTURE CANOPY

If there is an existing fixture remove it.

Expose the supply wire from the outlet box.

Hold the fixture canopy to the ceiling and mark the three additional support holes with a pencil.

Drill three holes, insert the ceiling anchors. Secure the fixture canopy with the 2 screws in the J-box along with the 3 additional support screws.

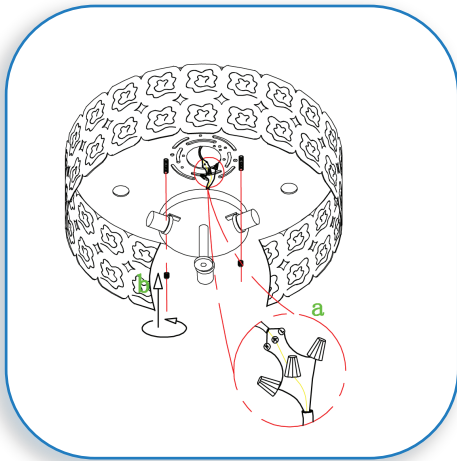


2

CONNECT SUPPLY AND FIXTURE WIRES

Locate the 2 screws hanging down from the J-Box.

Locate the fixture wires from the socket cluster of the fixture. Connect the black supply wire to the black fixture wire and the white supply wire to the white fixture wire. Connect the green(ground) wire from the fixture to the outlet box ground wire, or to the green screw.

Secure all wire connections with wire nuts. Insert the hanging screws through the designated holes in the socket cluster and secure with the supplied thumb screws.

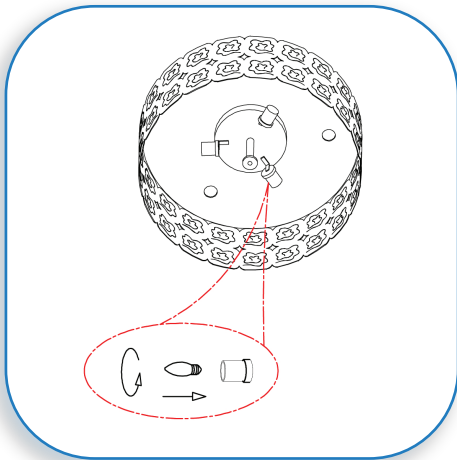


3

INSERT YOUR BULBS

Insert 3 x 60W A-19 Bulbs.

DO NOT EXCEED WATTAGE INDICATED

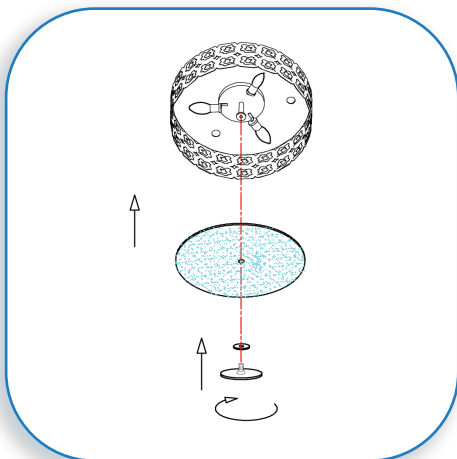

4

SECURE THE GLASS PLATE

Secure the glass plate to the fixture by placing the washer onto the thumb screw. Insert the thumb screw into the designated hole in the center of the glass plate. Tighten to secure.

RESTORE THE ELECTRICITY AND CHECK THE
OPERATION OF YOUR NEW ACCESS FIXTURE



5

We hope that you get great
satisfaction from your new
Access Lighting Light Source

