

# access

## LIGHTING

## INSTALLATION INSTRUCTIONS

### IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.


**NOTE:** The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

### GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

### STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

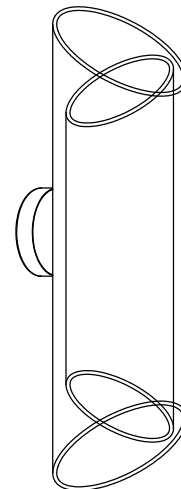

**COLLECTION**  
Gyro

**APPLICATION**  
Wall Fixture


**MODEL NO.**  
52063

### WHAT WE PROVIDE

- Mounting Hardware
- Crossbar Plate
- 2 x Glass Shade
- 2 x 60W G9 Bulbs

### WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code

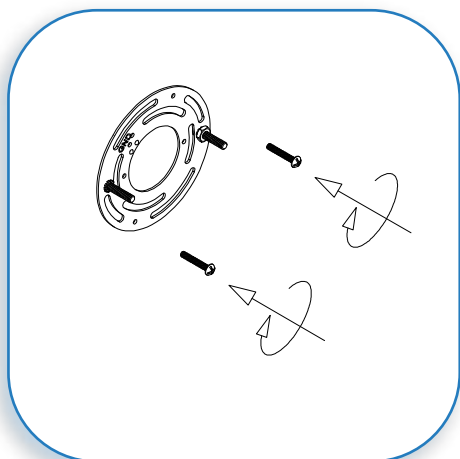


# 1

### MARK BACKPLATE LOCATION

If an existing fixture exists, remove it.

Gently pull the supply wires out from the J-Box. Mount the universal crossbar to the J-box with the supplied screws. Ensure that the additional screws protruding from your crossbar are facing outward and are level to ensure that your fixture will sit straight.

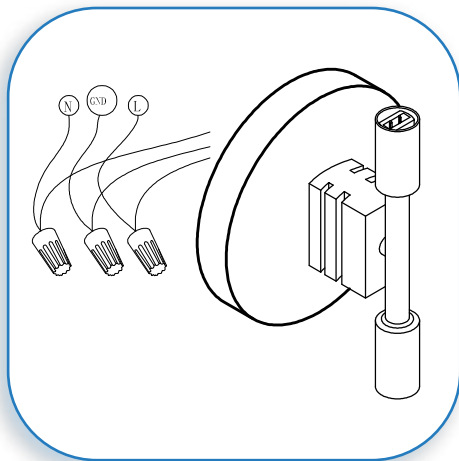

2


### MAKE WIRE CONNECTIONS

Gently pull the supply wires out of the j-box .

Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the white fixture wire. Secure with the supplied wire nuts. Either wrap the green wire around one of the protruding screws

or connect it to the supply ground wire. Secure all wire with electrical tape (not supplied).

Tuck all wires carefully into the J-Box.

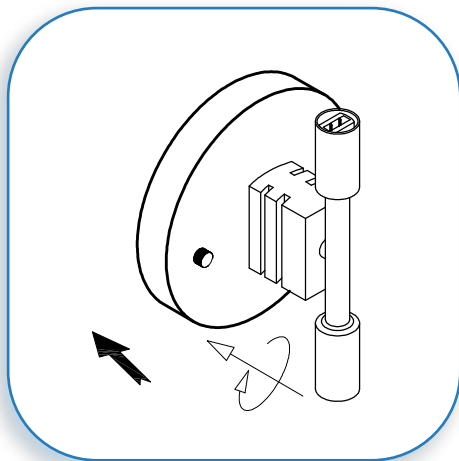


3

### SECURE THE FRONT PLATE

Hold the front plate up to the universal crossbar.

Insert the screws protruding from the crossbar into the designated holes in the front plate. Secure with the supplied thumb screws.

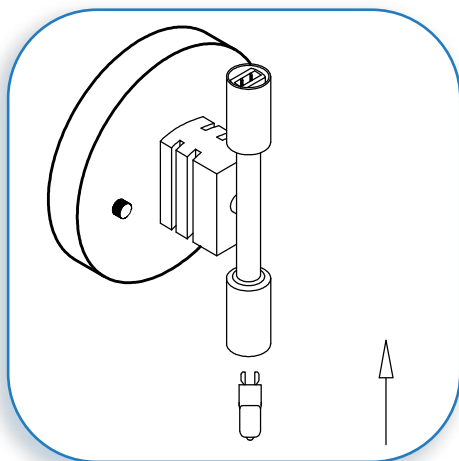


4

### INSERT THE BULBS

Insert the bulbs into the sockets


DO NOT EXCEED THE RECOMMENDED WATTAGE ON THE LABEL.

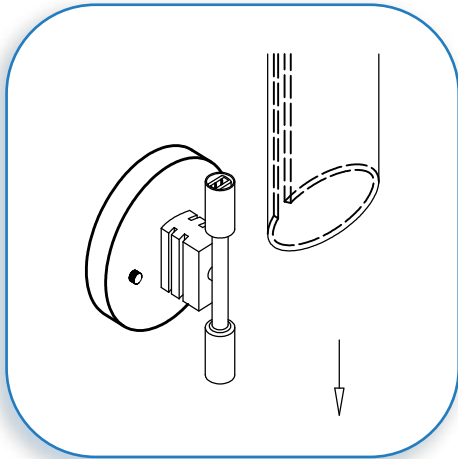

5

### GLASS SHADE

You have been provided with two glass shades, one frosted and one clear. Find the two slots that are located on the front plate of the fixture. One slot will be closer to the wall and is designated for the clear outer shade, whilst the other slot, closer to the bulb, is designated for the smaller frosted glass. Carefully slide the appropriate glass into its designated slot.

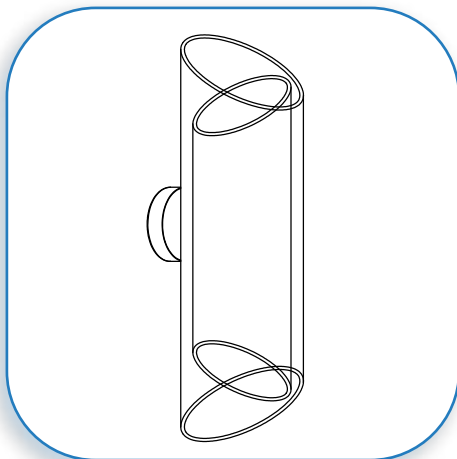

6

### RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS FIXTURE

