



# INSTALLATION INSTRUCTIONS

## IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.

**NOTE:** The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

## GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

## STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.




COLLECTION	APPLICATION	MODEL NO.
Iridium	Wall Fixture	62270

### WHAT WE PROVIDE

- Mounting Hardware
- Fixture Plate
- 1 x Crossbar
- 8 x Glass Shade
- 4 x 50W Hgn G9 Bulbs

### WHAT YOU NEED


- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code

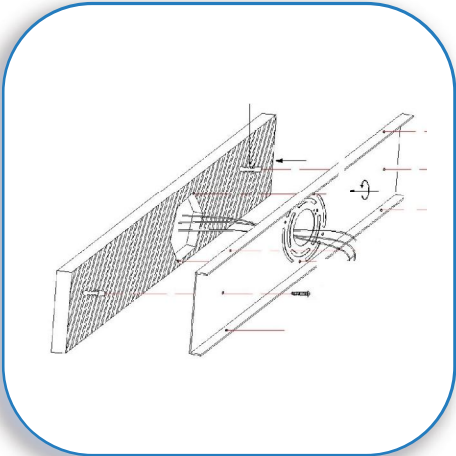

1

### MARK CROSSBAR PLATE LOCATION

Determine the desired location of your fixture. Hold the back plate up to the surface and mark with a pencil the location of the mounting plugs (small hole on the left and right hand side of the back plate). Drill a hole and insert the mounting plugs into the mounting surface.

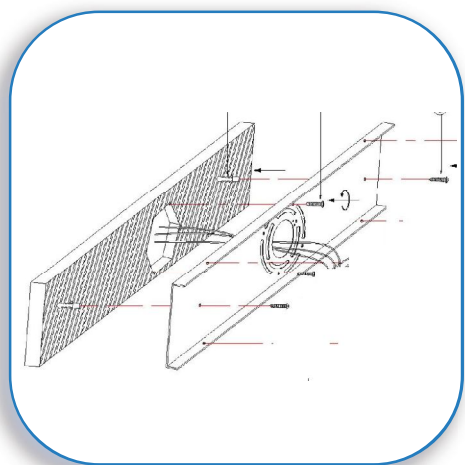


2

### MOUNT CROSSBAR PLATE

Gently pull the supply wires out of the j-box.

Mount the crossbar to the J-box with the supplied screws.

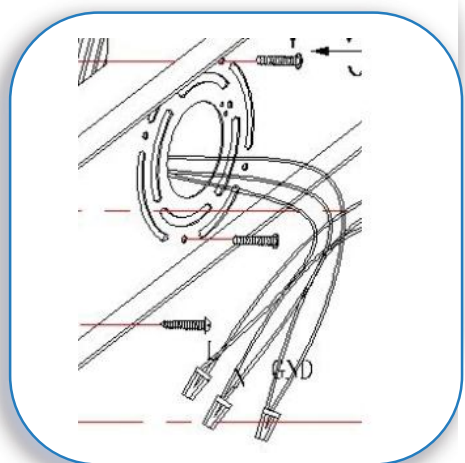


3

### MAKE WIRE CONNECTIONS

Gently pull the supply wires through the hole in the crossbar . Gently feed the fixture wire through one of the slits in the back plate and then through the hole floating canopy. Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the white fixture wire. Secure with the supplied wire nuts. Either wrap the green wire around one of the protruding screws or connect it to the supply ground wire. Secure all wire with electrical tape (not supplied).

Tuck all wires carefully into the J-Box.

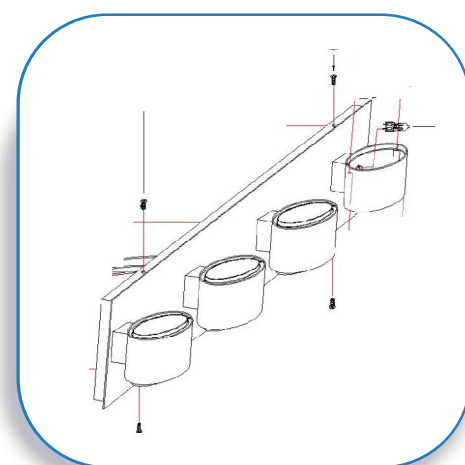


4

### MOUNT FIXTURE TO THE CROSSBAR PLATE

Position the fixture plate over the crossbar plate.

Align the holes at the top and bottom of the plates.

Secure with the supplied screws.

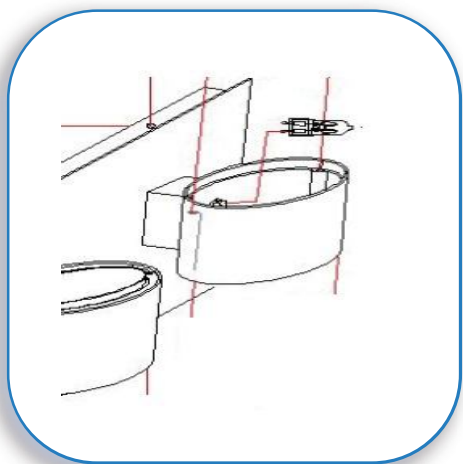


5

### INSERT BULB

Insert the bulb.

MAXIMUM WATTAGE 50W.

DO NOT EXCEED THE WATTAGE AS STATED  
ON THE WARNING LABEL AND IN THE INSTRUCTION  
SHEETS

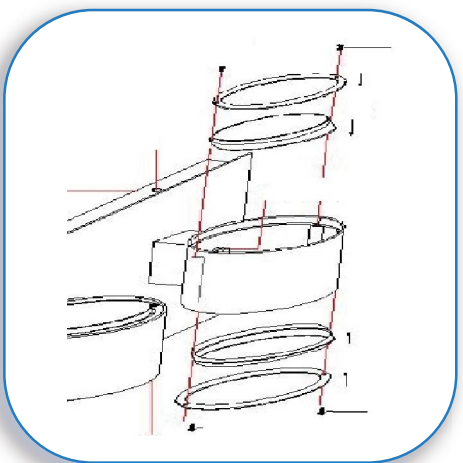


6

### SECURE THE GLASS SHADE

Position the glass with trim in the fixture.

Align the holes of the fixture and secure by inserting the  
supplied screws.

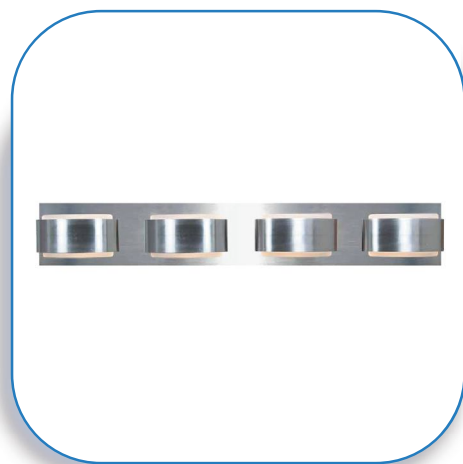

7

### RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS FIXTURE

