

Supplement 2018

AFD[®]



An industry leader in decorative and functional LED lighting design, we have maintained our respected position in the lighting industry via our commitment to ongoing product innovation and portfolio expansion.

By fully understanding the needs and expectations of our customers, we will continue advancing the use of sustainable LED lighting solutions with the focus of enhancing the performance and quality of light in any space illuminated by our products.

And with versatile lighting solutions for a wide range of commercial and residential applications, AFX products cover a range of design aesthetics to complement any architectural style.

lighting your vision.





TABLE OF CONTENTS

Pendant	p.4-9
Wall	p.10-32
Vanity	p.33
Ceiling	p.34-35
Linear	p.36-38
Undercabinet	p.39

KEY

LED	
Dimmable Option	
American Disability Act	
Wet Location	
Title 24	
ENERGY STAR® Qualified	






ISLA

- Hand-blown frosted ribbed white glass
- 8 ft. adjustable cord
- Medium base socket, 60W MAX

White	Qty.	Lamp	DIA.	H
ISLP11WH	1	60W (MAX)	11"	16"





CLEO

- Hand-blown frosted ribbed white glass
- 8 ft. adjustable cord
- Medium base socket, 60W MAX

White	Qty.	Lamp	DIA.	H
CLEP13WH	1	60W (MAX)	12-1/2"	13-3/4"





LOLA

- Hand-blown frosted ribbed white glass
- 8 ft. adjustable cord
- Medium base socket, 60W MAX

White	Qty.	Lamp	DIA.	H
LOLP11WH	1	60W (MAX)	11"	18-1/4"





CALLIE

- Hand-blown frosted ribbed white glass
- 8 ft. adjustable cord
- Medium base socket, 60W MAX

White	Qty.	Lamp	DIA.	H
CALP05WH	1	60W (MAX)	8"	5-1/2"
CALP09WH	1	60W (MAX)	9"	15-1/4"



∅ DIA.

BOON

- Decorative cut metal cylinder
- Powder coat finish
- 8 ft. adjustable cord

LED

- 120-277V universal voltage driver
- 0-10V dimming
- 50,000 hr. LED life, 90 CRI

	LED	Source Lumens	CCT	DIA.	H
White BONP0407L30D2WH	14W	700	3000K	3-1/2"	12"
Black BONP0407L30D2BK	14W	700	3000K	3-1/2"	12"



White

Black/
Gold

ASH

- Metal perforated cylinder
- Powder coat finish
- 8 ft. adjustable cord

LED

- 120-277V universal voltage driver
- 0-10V dimming
- 50,000 hr. LED life, 90 CRI

White	Black	LED	Source Lumens	CCT	DIA.	H
ASHP0407L30D2WH	ASHP0407L30D2BK	14W	700	3000K	3-1/2"	12"





Black/Gold


SUMMIT

- Metal housing
- Powder coated finish
- Open top and bottom
- Indirect light with wall wash effect

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal voltage (MV)
- 50,000 hr. LED life, 90 CRI


White/Silver	Black/Gold	LED	Source Lumens	CCT	H	W	D
SUMS051413L30D1WH	SUMS051413L30D1BK	20W	1300	3000K	14"	5"	3"
SUMS051413L30MVWH	SUMS051413L30MVBK	20W	1300	3000K	14"	5"	3"



White/Silver



Black Chrome

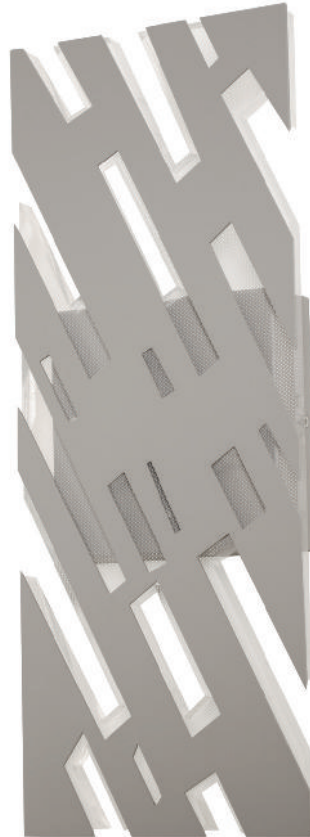

Silver


STORM


- Indirect light with wall wash effect
- Edge-lit diffuser
- Vertical or horizontal mount

LED

- 120-277V universal voltage driver
- 0-10V dimming
- 50,000 hr. LED life, 90 CRI

Black Chrome	Silver	LED	Source Lumens	CCT	H	W	D
STMS061408L30D2BC	STMS061408L30D2SL	13W	800	3000K	14"	5-1/2"	2"



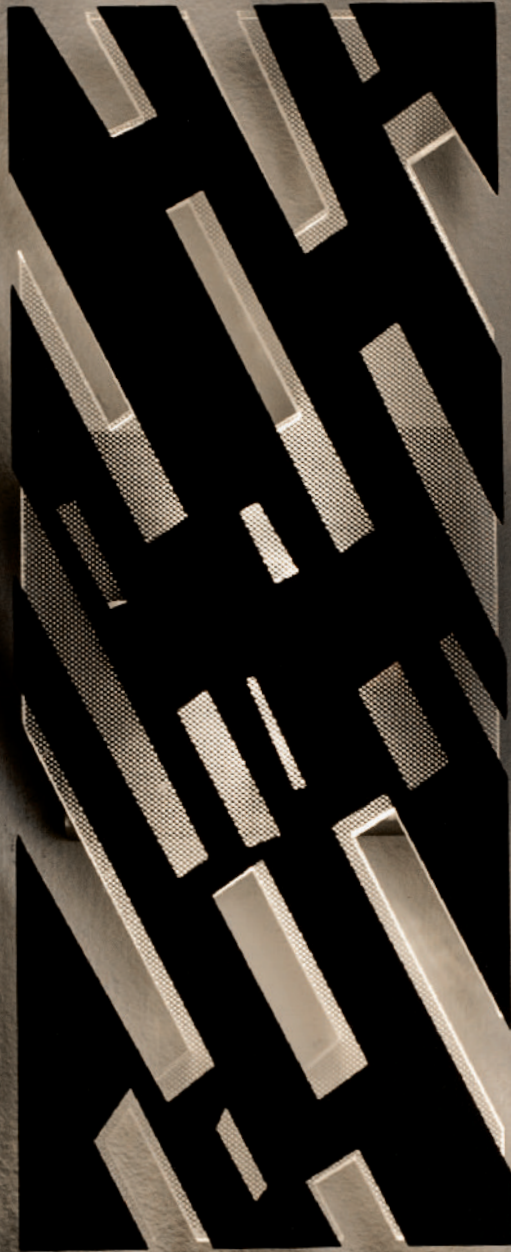

Black Chrome




PLANE

- White powder coated metal faceplate
- Frosted acrylic diffuser
- Indirect light for wall wash effect
- Wall or ceiling mount

LED

- 120-277V universal voltage driver
- 0-10V dimming
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	H	W	D
PLNS090909L30D2WH	16W	960	3000K	9"	9"	2"




ECLIPSE


- White powder coated metal faceplate
- Frosted acrylic diffuser
- Indirect light for wall wash effect
- Wall or ceiling mount

LED

- 120-277V universal voltage driver
- 0-10V dimming
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	DIA.	D
ECPS090909L30D2WH	16W	900	3000K	9"	2"



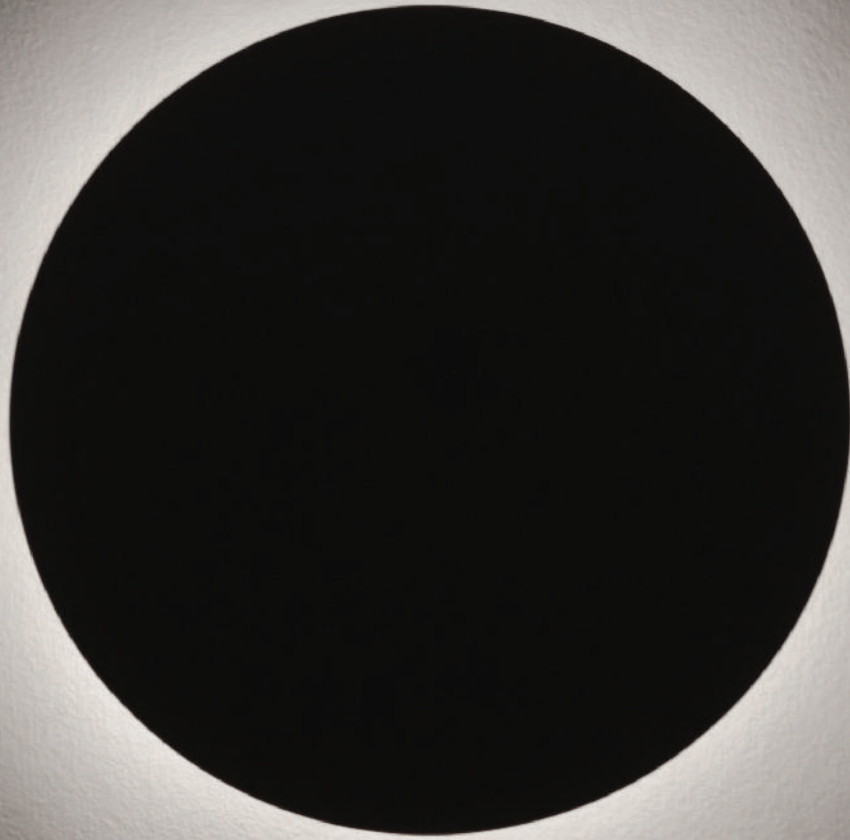



Brushed Nickel



Oil-Rubbed Bronze


VENTURA

- Decorative metal bands
- White acrylic diffuser
- Open top and bottom

LED

- 120V operation
- 50,000 hr. LED life, 80 CRI

	LED	Source Lumens	CCT	H	W	D
Brushed Nickel VNTS071009L30ENBN	9W	900	3000K	9-7/8"	7-1/8"	3-1/2"
Oil-Rubbed Bronze VNTS071009L30ENRB	9W	900	3000K	9-7/8"	7-1/8"	3-1/2"



3in1 color
temperature
3000K/3500K/4000K


SORRENTO

- Metal backplate and decorative band
- White acrylic diffuser

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

Satin Nickel	LED	Source Lumens	CCT	H	W	D
SORS051914LAJUDSN	15W	1200	3000K/3500K/4000K	18-1/2"	5"	3-1/2"





Black



White


CONCORD

- Metal housing
- Durable powder coated finish
- Frosted glass diffuser
- Down-light illumination
- Wet location rated

LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI

White	Black	LED	Source Lumens	CCT	H	W	D
CNCW100510L30D2WH	CNCW100510L30D2BK	12W	1000	3000K	4-1/2"	10-1/2"	4"





Textured Grey



Textured Bronze

3in1 color temperature
3000K/3500K/4000K


BROADWAY

- Metal housing
- Durable powder coated finish
- White acrylic diffuser
- Wet location rated

LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

	LED	Source Lumens	CCT	H	W	D
Textured Grey						
*BDWW041423LAJD2TG	20W	2300	3000K/3500K/4000K	13-1/2"	4-1/2"	3"
*BDWW072033LAJD2TG	28W	3300	3000K/3500K/4000K	19-1/2"	6-1/2"	4"
BDWW083035LAJD2TG	36W	3500	3000K/3500K/4000K	30"	8"	5"
Textured Bronze						
*BDWW041423LAJD2BZ	20W	2300	3000K/3500K/4000K	13-1/2"	4-1/2"	3"
*BDWW072033LAJD2BZ	28W	3300	3000K/3500K/4000K	19-1/2"	6-1/2"	4"
BDWW083035LAJD2BZ	36W	3500	3000K/3500K/4000K	30"	8"	5"



3in1 color
temperature
3000K/3500K/4000K



Textured Bronze


PAXTON

- Metal housing
- Durable powder coated finish
- White acrylic diffuser
- Wet location rated

LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

	LED	Source Lumens	CCT	H	W	D
Textured Grey						
PAXW071223LAJD2TG	20W	2300	3000K/3500K/4000K	12"	7"	3-1/2"
PAXW071828LAJD2TG	24W	2800	3000K/3500K/4000K	18"	7"	3-1/2"
Textured Bronze						
PAXW071223LAJD2BZ	20W	2300	3000K/3500K/4000K	12"	7"	3-1/2"
PAXW071828LAJD2BZ	24W	2800	3000K/3500K/4000K	18"	7"	3-1/2"



Textured Grey



Textured Grey



Textured Bronze

3in1 color
temperature
3000K/3500K/4000K


PASADENA

- Metal housing
- Durable powder coated finish
- White acrylic diffuser
- Wet location rated

LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

	LED	Source Lumens	CCT	H	W	D
Textured Grey						
PSDW071223LAJD2TG	20W	2300	3000K/3500K/4000K	12"	6"	3-3/4"
PSDW071833LAJD2TG	28W	3300	3000K/3500K/4000K	18"	6-3/4"	4"
Textured Bronze						
PSDW071223LAJD2BZ	20W	2300	3000K/3500K/4000K	12"	6"	3-3/4"
PSDW071833LAJD2BZ	28W	3300	3000K/3500K/4000K	18"	6-3/4"	4"



3in1 color
temperature



3000K/3500K/4000K



Textured Bronze


STACK

- Metal housing
- Durable powder coated finish
- White acrylic diffuser
- Wet location rated


LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

	LED	Source Lumens	CCT	H	W	D
Textured Grey						
STCW071228LAJD2TG	24W	2800	3000K/3500K/4000K	12"	7"	4"
STCW071833LAJD2TG	28W	3300	3000K/3500K/4000K	18"	7"	4"
Textured Bronze						
STCW071228LAJD2BZ	24W	2800	3000K/3500K/4000K	12"	7"	4"
STCW071833LAJD2BZ	28W	3300	3000K/3500K/4000K	18"	7"	4"



Textured Grey

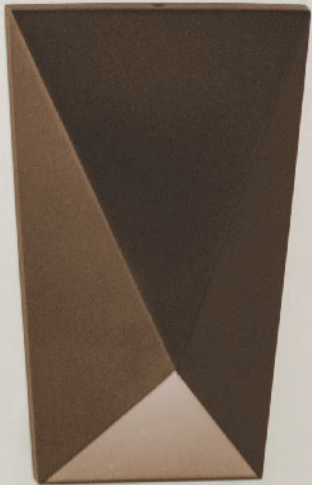

Bronze



KNOX

- Metal multi-faceted housing
- Durable powder coated finish
- Frosted glass diffuser
- Down-light illumination
- Wet location rated


LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI



White

Bronze	White	LED	Source Lumens	CCT	H	W	D
KNXW061010L30D2BZ	KNXW061010L30D2WH	12W	1000	3000K	10"	6-1/4"	3-1/2"





Black

COLTON

- Metal housing
- Durable powder coated finish
- Frosted glass diffuser
- Down-light illumination
- Wet location rated

LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI



White

White

CLTW060410L30D2WH

Black

CLTW060410L30D2BK

LED

12W

Source Lumens

1000

CCT

3000K

H


4-1/4"

W

6-1/2"

D

2-1/2"





White

DAKOTA

- Metal housing
- Durable powder coated finish
- Frosted glass diffuser
- Down-light illumination
- Wet location rated


LED


- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI



Black

White	Black	LED	Source Lumens	CCT	H	W	D
DKTW050410L30D2WH	DKTW050410L30D2BK	12W	1000	3000K	4-1/8"	4-7/8"	2-1/2"



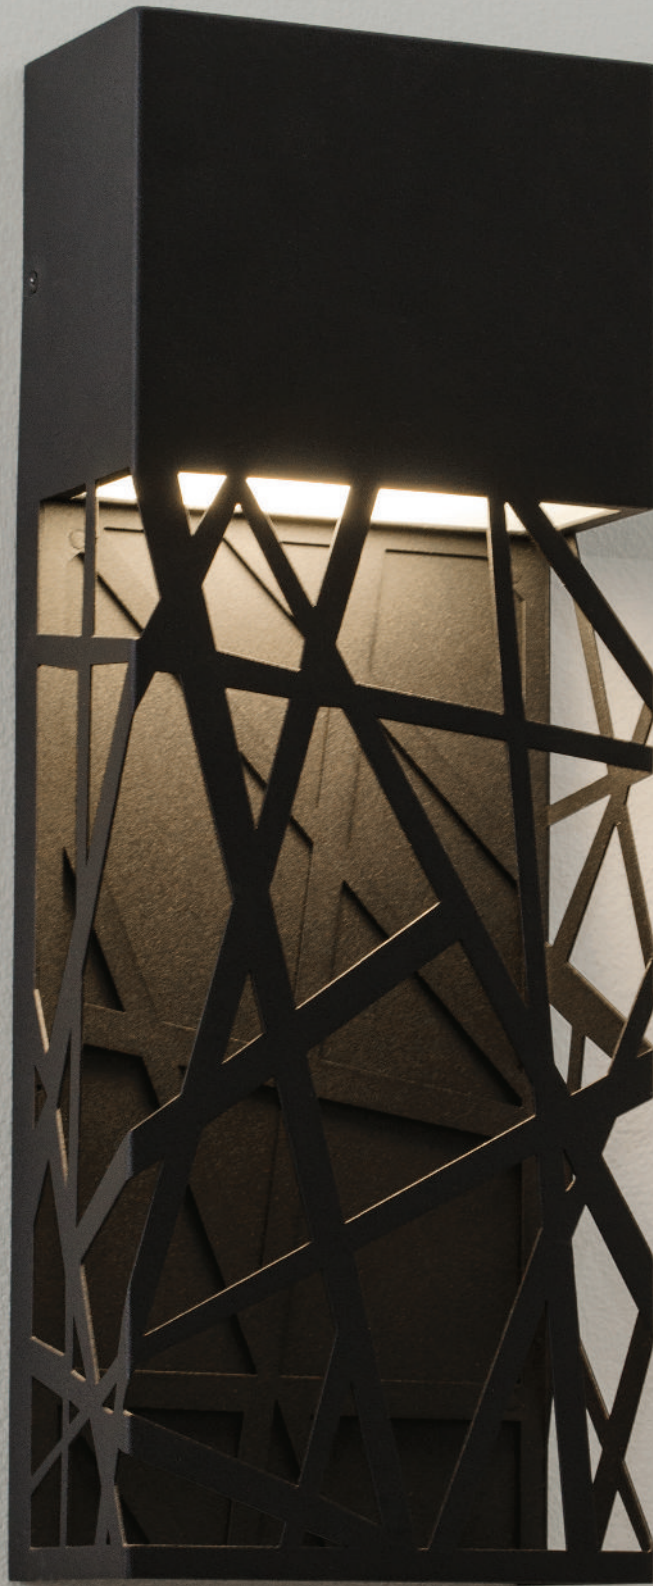

Black

BOON

- Decorative cut metal housing
- Durable powder coated finish
- Frosted glass diffuser
- Down-light illumination
- Wet location rated


LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI



White

White	Black	LED	Source Lumens	CCT	H	W	D
BONW071710L30D2WH	BONW071710L30D2BK	12W	1000	3000K	16"	6"	3"





Textured Grey



Textured Bronze

3in1 color temperature

3000K/3500K/4000K


LASALLE

- Metal housing
- Durable powder coated finish
- White acrylic diffuser
- Wet location rated

LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

	Source Lumens		CCT	H	W	D
Textured Grey						
LASW051728LAJD2TG	24W	2800	3000K/3500K/4000K	17"	5-1/2"	3-3/8"
LASW052833LAJD2TG	28W	3300	3000K/3500K/4000K	28"	5-1/2"	5"
Textured Bronze						
LASW051728LAJD2BZ	24W	2800	3000K/3500K/4000K	17"	5-1/2"	3-3/8"
LASW052833LAJD2BZ	28W	3300	3000K/3500K/4000K	28"	5-1/2"	5"



3in1 color
temperature



3000K/3500K/4000K



Textured Bronze


AVENUE

- Metal housing
- Durable powder coated finish
- White acrylic diffuser
- Wet location rated

LED

- Minimum starting temp -20°F
- 120-277V universal voltage driver
- 0-10V dimmable
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

	LED	Source Lumens	CCT	H	W	D
Textured Grey AUW103643LAJD2TG	42W	4300	3000K/3500K/4000K	36"	8"	4"
Textured Bronze AUW103643LAJD2BZ	42W	4300	3000K/3500K/4000K	36"	8"	4"



Textured Grey



Black



White


CAPE

- Die-cast aluminum housing with protective guard
- Durable powder coat finish
- Frosted ribbed glass diffuser
- Wet location rated

LED

- Minimum starting temp -20°F
- 120V operation
- 50,000 hr. LED life, 80 CRI

	Source					
	LED	Lumens	CCT	H	W	D
White						
CAPW050804L30ENWH	6W	430	3000K	8-1/2"	5"	4-3/8"
Black						
CAPW050804L30ENBK	6W	430	3000K	8-1/2"	5"	4-3/8"





3-Light

HOLLYWOOD

- Metal housing
- White diffusers
- Horizontal or vertical mount


LED

- 120V operation
- 50,000 hr. LED life, 90 CRI




4-Light

Satin Nickel	LED	Source Lumens	CCT	L	H	D
HLWV240417L30ENSN (3-Light)	20W	1700	3000K	24"	4-3/4"	3-5/8"
HLWV240422L30ENSN (4-Light)	28W	2200	3000K	24"	4-3/4"	3-5/8"



3-Light



4-Light



White

PEARSON

- Metal housing
- White acrylic diffuser

LED


- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT



Satin Nickel

3in1 color temperature
2700K/3000K/3500K

White	Satin Nickel	LED	Source Lumens	CCT	SQ.	H
PEAF1215LAJUDWH	PEAF1215LAJUDSN	15W	1400	2700K/3000K/3500K	12"	3-3/16"
PEAF1624LAJUDWH	PEAF1624LAJUDSN	30W	2400	2700K/3000K/3500K	16"	3-3/16"





Brushed Nickel

LIMA

- Die-cast decorative metal accents
- Swirl glass diffuser
- Brushed nickel and bronze clips both included


LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 80 CRI



Bronze

Brushed Nickel/Bronze	Source				
	LED	Lumens	CCT	DIA	H
LMAF1217L27D1BN	16W	1700	2700K	12"	4"
LMAF1617L27D1BN	16W	1700	2700K	16"	4-3/4"





SPRING/RIVIERA

- White steel housing
- Clear prismatic diffuser

SPRING LED


- 120-277V universal voltage driver
- 50,000 hr. LED life, 80 CRI

White	LED	Source Lumens	CCT	L	W	H
SPRL052424L40MV	26W	2400	4000K	24"	5-3/8"	2-3/8"
SPRL054836L40MV	40W	3600	4000K	48"	5-3/8"	2-3/8"

RIVIERA LED

- Title 24 compliant
- 120-277V universal voltage driver
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	L	W	H
*RIVL052424L40MV	26W	2400	4000K	24"	5-3/8"	2-3/8"
*RIVL054836L40MV	40W	3600	4000K	48"	5-3/8"	2-3/8"




SHAW

- White steel housing
- Frosted acrylic diffuser
- End-to-end connector (included)
- Power cord and connection cable optional

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	L	W	H
SHAL052420L40D1	28W	2000	4000K	24"	5-3/8"	2"
SHAL054836L40D1	48W	3600	4000K	47"	5-3/8"	2"





T5LCLTP

T5L CLOSET

- White steel housing
- White acrylic diffuser
- Standard knockouts


LED

- 120V operation
- 50,000 hr. LED life, 90 CRI



T5LCLT

White	LED	Source Lumens	CCT	L	W	D
T5LCLT (on/off rocker switch)	9W	700	4000K	18"	4-1/2"	1-3/8"
T5LCLTP (on/off pull chain switch)	9W	700	4000K	18"	4-1/2"	1-3/8"



T5LCLT



T5LCLTP






KOREN

- Low profile
- Extruded aluminum housing
- Linkable up to 200W with connecting cable or direct connector
- Selectable switch: choose 1 of 3 colors of 2700K, 3000K or 4000K
- Dimmable with TRIAC wall dimmers
- Hi/low switch
- Plug-in or direct wire
- 100,000 hr. LED life, 90 CRI
- Patent pending

3in1 color
temperature
2700K/3000K/4000K

Size	White	Oil-Rubbed Bronze	Type	Lumens			LPW	L	W	D
				2.7K	3.0K	4.0K				
9 in.	KNLU9WH	KNLU9RB	4.6W SMT-Array	259	290	384	63	9"	3"	5/8"
14 in.	KNLU14WH	KNLU14RB	6.7W SMT-Array	384	437	442	65	14"	3"	5/8"
22 in.	KNLU22WH	KNLU22RB	10.7W SMT-Array	656	746	755	69	22"	3"	5/8"
32 in.	KNLU32WH	KNLU32RB	14.4W SMT-Array	927	1022	1023	70	32"	3"	5/8"
40 in.	KNLU40WH	KNLU40RB	18W SMT-Array	1170	1302	1310	72	40"	3"	5/8"

LPW based on 3000K color temperature




INDEX

ASHP0407L30D2BK.....	9
ASHP0407L30D2WH.....	9
AUW103643LAJD2BZ.....	31
AUW103643LAJD2TG.....	31
BDWW041423LAJD2BZ.....	20
BDWW041423LAJD2TG.....	20
BDWW072033LAJD2BZ.....	20
BDWW072033LAJD2TG.....	20
BDWW083035LAJD2BZ.....	20
BDWW083035LAJD2TG.....	20
BONP0407L30D2BK.....	8
BONP0407L30D2WH.....	8
BONW071710L30D2BK.....	29
BONW071710L30D2WH.....	29
CALP05WH.....	7
CALP09WH.....	7
CAPW050804L30ENBK.....	32
CAPW050804L30ENWH.....	32
CLEP13WH.....	5
CLTW060410L30D2BK.....	26
CLTW060410L30D2WH.....	26
CNCW100510L30D2BK.....	19
CNCW100510L30D2WH.....	19
DKTW050410L30D2BK.....	27
DKTW050410L30D2WH.....	27
ECPS090909L30D2WH.....	14
HLWV240417L30ENSN.....	33
HLWV240422L30ENSN.....	33
ISLP11WH.....	4
KNLU14RB.....	39
KNLU14WH.....	39
KNLU22RB.....	39
KNLU22WH.....	39
KNLU32RB.....	39
KNLU32WH.....	39
KNLU40RB.....	39
KNLU40WH.....	39
KNLU9RB.....	39
KNLU9WH.....	39
KNXW061010L30D2BZ.....	25
KNXW061010L30D2WH.....	25
LASW051728LAJD2TG.....	30
LASW051728LAJD2BZ.....	30
LASW052833LAJD2BZ.....	30
LASW052833LAJD2TG.....	30
LMAF1217L27D1BN.....	35
LMAF1617L27D1BN.....	35
LOLP11WH.....	6
PAXW071223LAJD2BZ.....	21
PAXW071223LAJD2TG.....	21
PAXW071828LAJD2BZ.....	21
PAXW071828LAJD2TG.....	21
PEAF1215LAJUDSN.....	34
PEAF1215LAJUDWH.....	34
PEAF1624LAJUDSN.....	34
PEAF1624LAJUDWH.....	34
PLNS090909L30D2WH.....	14
PSDW071223LAJD2BZ.....	22
PSDW071223LAJD2TG.....	22
PSDW071833LAJD2BZ.....	22
PSDW071833LAJD2TG.....	22
RIVL052424L40MV.....	36
RIVL054836L40MV.....	36
SHAL052420L40D1.....	37
SHAL054836L40D1.....	37
SORS051914LAJUDSN.....	17
SPRL052424L40MV.....	36
SPRL054836L40MV.....	36
STCW071228LAJD2BZ.....	23
STCW071228LAJD2TG.....	23
STCW071833LAJD2BZ.....	23
STCW071833LAJD2TG.....	23
STMS061408L30D2SL.....	12
STMS061408L30D2BC.....	12
SUMS051413L30D1BK.....	11
SUMS051413L30D1WH.....	11
SUMS051413L30MVBK.....	11
SUMS051413L30MVWH.....	11
T5LCLT.....	38
T5LCLTP.....	38
VNTS071009L30ENBN.....	16
VNTS071009L30ENRB.....	16

Color Correlated Temperature

When selecting color for your fixtures, it's important to consider color temperature in relation to the application. Whether for a residence or a commercial space, for a productive environment or leisure area, it's a subjective and personal choice. But, there are some generally accepted standards: Warm light is better for residential living areas; cool light is better for task areas such as the kitchen or office. Current energy-efficient technology allows for a high level of quality across the whole color spectrum, so the choice is yours.

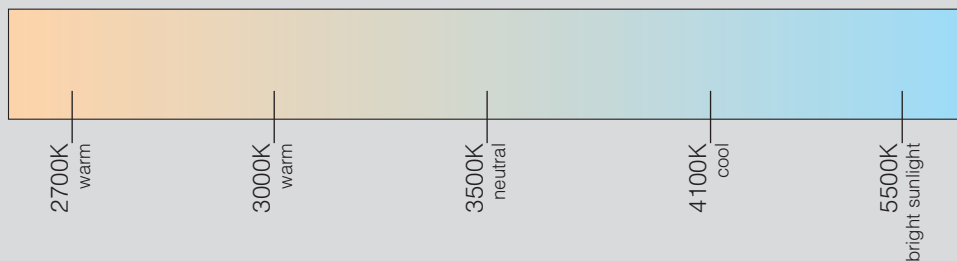

3in1 color
temperature

Look for the "3 in 1" icon throughout this catalog for products that offer color changing options.

©2018 AFX, Inc.
All rights reserved.

Specifications subject to
change without notice.

Specific items may be
protected by patents
or patents pending.



2345 N. Ernie Krueger Circle • Waukegan, IL 60087
847.249.5970 • AFXinc.com

AFXCR0118S