



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Pearl LED Sconce PRLS Series

Features

Sleek contemporary styling with die-cast metal backplate. Can be mounted up or down. ADA Compliant. Ideal use in hallways, entrances or anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).

Construction

Back plate is die-formed gauge steel. Power supply connections must be made inside a junction box (not included).

Finish

Black, Satin Brass or Satin Nickel.

Diffuser

White glass diffuser.

Electrical

Input 120 VAC 60 Hz.
Compatible with residential TRIAC and ELV dimmers.

LED

Integrated LED modules capable of producing:
7.5W = 700 source lumens, 495 delivered lumens
13W = 1200 source lumens, 945 delivered lumens
3000K (CCT) rated for 50,000 hrs., 90 CRI.


Certification

All fixtures are cETLus listed for indoor damp locations.
ADA Compliant
Title 24 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

**Specifications and dimensions
subject to change without notice.**

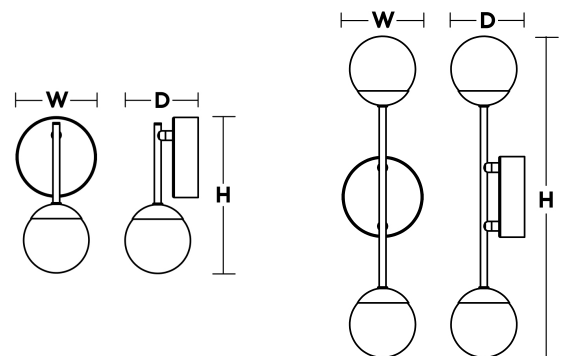

Ordering Information:

1-LIGHT

Black	Satin Brass	Satin Nickel	LED	Source Lumens	Delivered Lumens	CCT	H	W	D
PRLS0409L30D1BK	PRLS0409L30D1SB	PRLS0409L30D1SN	7.5W	700	495	3000K	8-1/2"	4-3/8"	4"

2-LIGHT

Black	Satin Brass	Satin Nickel	LED	Source Lumens	Delivered Lumens	CCT	H	W	D
PRLS0418L30D1BK	PRLS0418L30D1SB	PRLS0418L30D1SN	13W	1200	945	3000K	17-1/4"	4-3/8"	4"