

AC6011 ;AC6012;AC6013;AC6014 INSTALLATION INSTRUCTION

WARNING: BEFORE YOU START, NEVER ATTEMPT ANY WORK WITHOUT SHUTTING OFF THE ELECTRICITY UNTIL THE WORK IS DONE.

NOTE: THIS FIXTURE IS PARTIALLY ASSEMBLED IN THE FACTORY BY QUALIFIED CRAFTMEN. SOME ASSEMBLY IS REQUIRED BEFORE PLEASE FOLLOW ASSEMBLY INSTRUCTION CAREFULLY.

1. Fix mounting screw(6) into mounting bracket(7).
2. Fix mounting bracket(7), with machine screw(9), to outlet box(1).
3. Wire connection: connect black outlet box wire(2) to black fixture wire(10) with wire connector(3).
4. Repeat step 3 for white wire connection: i.e. white outlet box wire(5) to white fixture wire(11).
5. Partially thread ground screw(8) into mounting bracket(7), wrap ground wire(12) from fixture around ground screw(8) leaving enough excess wire to then connect ground wire(4) from outlet box with wire connector(3), tighten ground screw(8), do not over tighten.
6. Orient back plate(13) so that mounting screw(6) protrudes into the slot in the plate. Tighten the mounting screw with cap nut(14).
7. Put glass(15) and then the ring(16) over the lampholder, and secure them with internal threaded screw(17).
8. Install lamp(18) (not included), do not exceed recommended wattage.

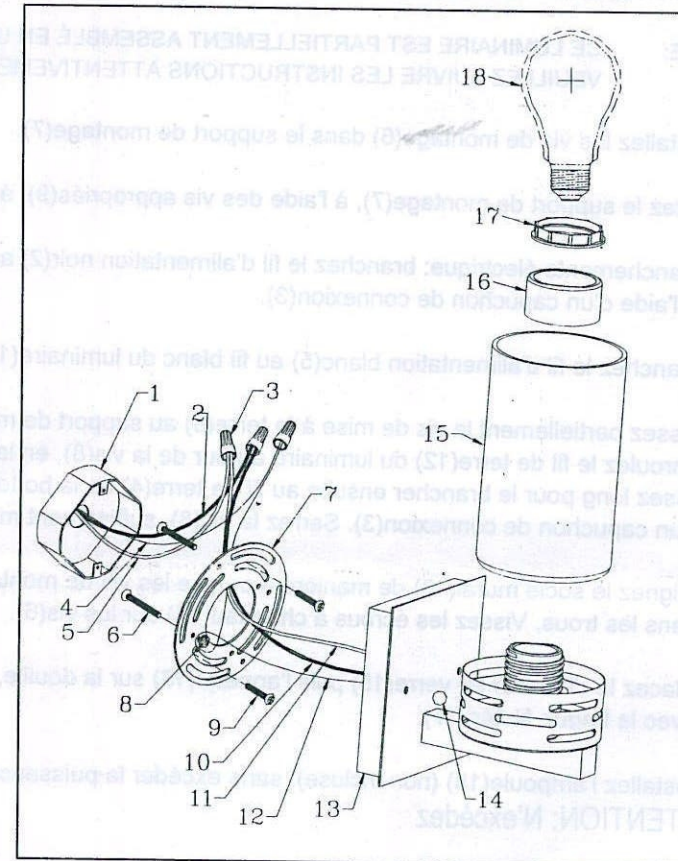


Fig.A

Grounding Detail

Connect Black or Red House Wire to	Connect White House Wire to:
Black	White
Parallel cord - SPT I & II (round & smooth)	Parallel cord - SPT I & II (square & ridged)
Clear, Brown, Gold or Black (without tracer)	Clear, Brown, Gold or Black (with tracer)
Insulated Wire (Other than GREEN) with copper conductor	Insulated Wire (Other than GREEN) with silver conductor

Fig.B