# AC6215/AC6216/6115/6116 INSTALLATION INSTRUCTIONS

**WARNING:** BEFORE ATTEMPTING TO INSTALL UNIT ENSURE POWER TO OUTLET BOX IS OFF.

Note: This fixture is partially assembled in the factory by qualified craftsmen.Some assembly is required before use.

Please follow assembly instruction carefully

1.With screw mount the metal plate 9 onto the outlet box .

2. Twist together white fixture wire with white outlet wire. Next, twist together black fixture wire with black outlet wire . Use wire nuts to secure connections. Connect the fixture ground wire 8 to the outlet box ground wire using wire nut(not included), by first wrapping ground wire around ground screw , tighten ground screw .

3.With the mounting screw through metal plate and the key hole on the ceiling plate ,and then screw tightly.

4.Install bulb (not included) into socket .

5.Strech the spring strip on the the ceiling plate and locate the glass , then release to hold tight the glass.

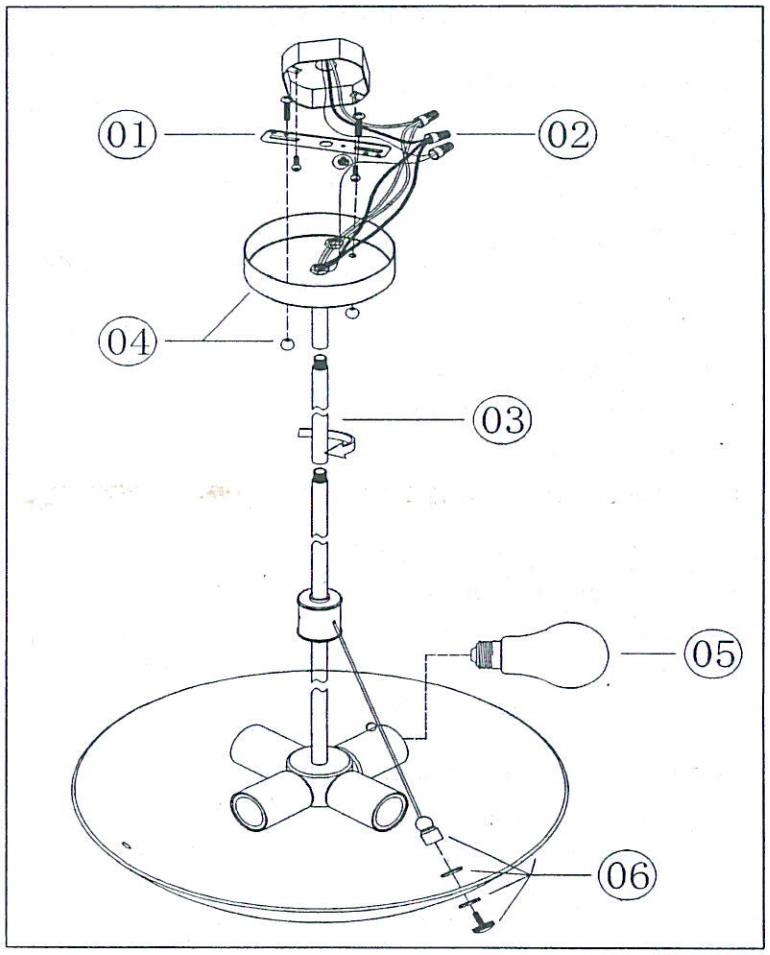


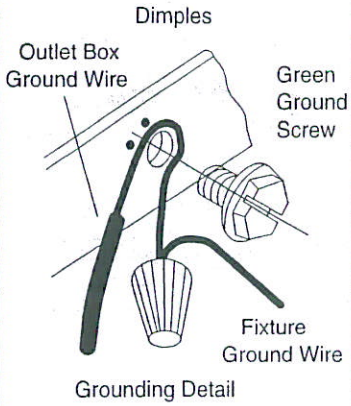

Grounding Detail

| Connect Black or Red House Wire to | Connect White House Wire to: |
|---|---|
| Black | White |
| **Parallel cord - SPT I & II** (round & .smooth) | **Parallel cord - SPT I & II** (square & ridged) |
| Clear.Brown,Gold or Black (without tracer) | Clear.Brown,Gold or Black (with tracer) |
| Insulated Wire (Other than GREEN) with copper conductor | Insulated Wire (Other than GREEN) with silver conductor |

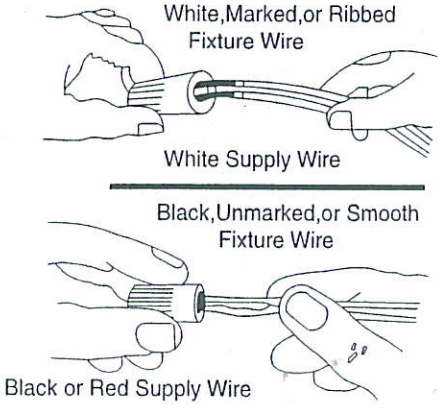


WARNING,RISK OF FIRE FOR SUPPLY CONNECTIONS USE WIRE RATED FOR AT LEAST 90℃ MOST DWELLINGS BUILT BEFORE1985 HAVE SUPPLY WIRE RATED 60℃.CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING.

# INSTALLATION & ASSEMBLY INSTRUCTIONS

***Attention:***

*Before assembling your lighting fixture, please read the following instructions. If you feel you do not have sufficient electrical experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.*

GENERAL

1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures are intended for mounting to a standard 4" x 2 ¼ " deep metal octagon outlet box. The box must be directly supported by the building structure.
4. Before commencing with the installation, ***disconnect the power by turning off the circuit breaker*** or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

*NOTE:*

***The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that cannot be built into any product. The person(s) caring for and operating the fixture must supply these factors.***

*CAUTION:*

- ***Ensure that the Fitting is Cool and Switched off, Before Changing Bulb.***
- ***Do Not use Bulbs Exceeding Maximum Wattage, As Per Caution Label.***