
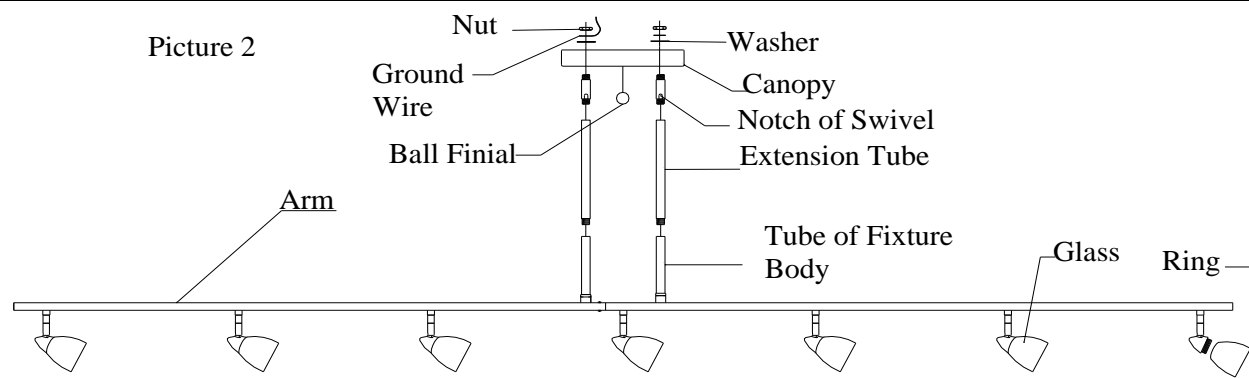


# INSTALLATION INSTRUCTIONS 954-77L and 954-10 (10 Head)

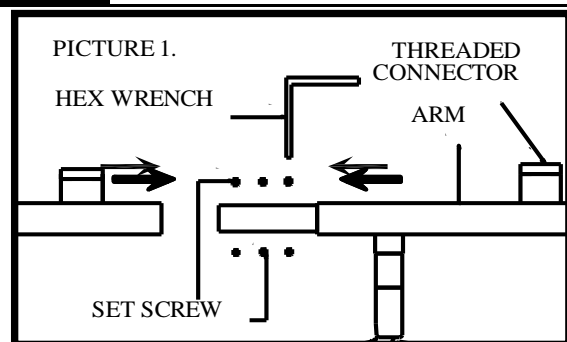

**CAUTION :** Before starting installation, turn off power by removing fuses or turning off circuit breakers, in order to prevent possible shock, turning off power by using the light switch is not sufficient to prevent electrical shock.

**GENERAL :** All electrical connections must be in accordance with local and national electrical code ( N.E.C ) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instruction .

1. Connect two sections of arm by sliding one end of arm into the opening end of the other arm and fix two sections of arm by 6 set screws by hex wrench provided ( See picture 1 ).

**NOTE :** If two threaded connector for tubes connection are not in alignment, loosen the set screws on arm and adjust the arm by rotation so that two threaded connectors are in alignment.

And then rotate the set screws by hex wrench until they are tight.

2. Remove nuts, washers and swivel in canopy prior to proceeding with


connection of extension tubes provided ( See picture 2 ).

3. Thread wires upward through tube of fixture body. Pull the wires slightly in case the wires wind around in the tube.
4. Connect tube of fixture body with rail by rotating the tube of fixture body.
5. Thread wires upward through extension tubes. Pull the wires slightly in case the wires wind around in the tube. Connect extension tubes with tube of fixture body by rotating the extension tubes.
6. Screw the swivels to tubes. Remember to make notch of swivel secured in correct position as shown in the diagram.
7. Insert nipples of swivels into holes of canopy and fasten with washers and nuts provided, making sure the ground wire washer has been assembled.
8. Attach the crossbar to the ceiling outlet box with two mounting screws.
9. Attach all BK fixtures wires with BK wire provided ; all WH fixtures wires with WH wire provided with wire large wire connector provided. Connect BK supply wire with BK fixture wire ; WH supply wire with WH fixture wire with wire connectors. Attach Green Ground canopy wire to Ground screw on cross bar and connect with Green Ground supply wire with wire connector.
10. Raise the fixture to the ceiling and secure in place with the ball finial.
11. Install the recommended bulb by rotating clockwise. 12. Turn on the power

**SAVE THESE INSTRUCTIONS**

## MOUNTING TO THE CEILING :

Picture 3.

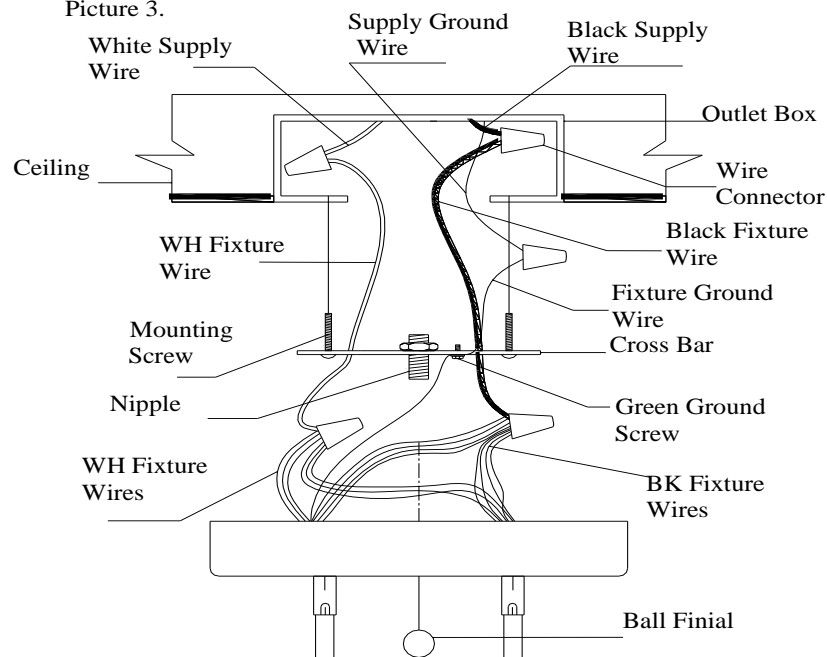

## NOTE : IF MOUNTING TO A WALL, PLEASE FOLLOW THESE MOUNTING INSTRUCTIONS BELOW :

1. When this fixture is supposed to use as a wall fixture, there is no need to install swivel on the extension tubes. Just install tube of fixture body with nipple on the other side of tube of fixture body to canopy and fasten with washers, nuts provided.
2. Leave 6" wires for wiring and cut the remaining wires.
3. Attach the crossbar to the ceiling outlet box with two mounting screws.
4. Connect BK supply wire with all BK fixtures wires ; WH supply wire with all WH fixture wires by using wire connectors ; Connect Ground supply wire and Ground fixture wire to Green Ground screw on the cross bar.
5. Raise the fixture to the ceiling and secure in place with the ball finial.
6. Remove the head cap by losing the cap set screws by screw driver.
7. Install the recommended bulb by rotating clockwise.
8. Recap by rotating cap set screws by screw driver.
9. Turn on the power.

