


ASSEMBLY INSTRUCTIONS

ITEM NO: BO-2444GT

1. CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE AND LAY THEM UP AS PER THE SKETCH.
2. PLACE BASE (A) ON A SMOOTH SURFACE, SCREW THE TUBE(B),GLASS TABLE (C) INTO LAMP BASE (A) IN TURN, PULL THE WIRE OUT FROM BASE.
- 3.SCREW POLE (F) INTO POLE (E).
- 4.TO ALLOW EASY INSERTION, FOLD EXTRA WIRE (D) AND USE ZIP TIES AS DESCRIBED IN THE DRAWING ON RIGHT AND INSERT IT INTO THE POLE (E).
5. SECURE PART (E) INTO (C).
6. PLACE THE SHADES(F) ONTO THE SOFT TUBE SECTION(E) TIGHTEN IN WITH SOCKET RING(G).
- 7.INSTALL THE BULB (NOT INCLUDED)
8. INSERT THE POLARIZED PLUG INTO OUTLET, TURN ON THE SWITCH AND ENJOY YOUR LAMP.

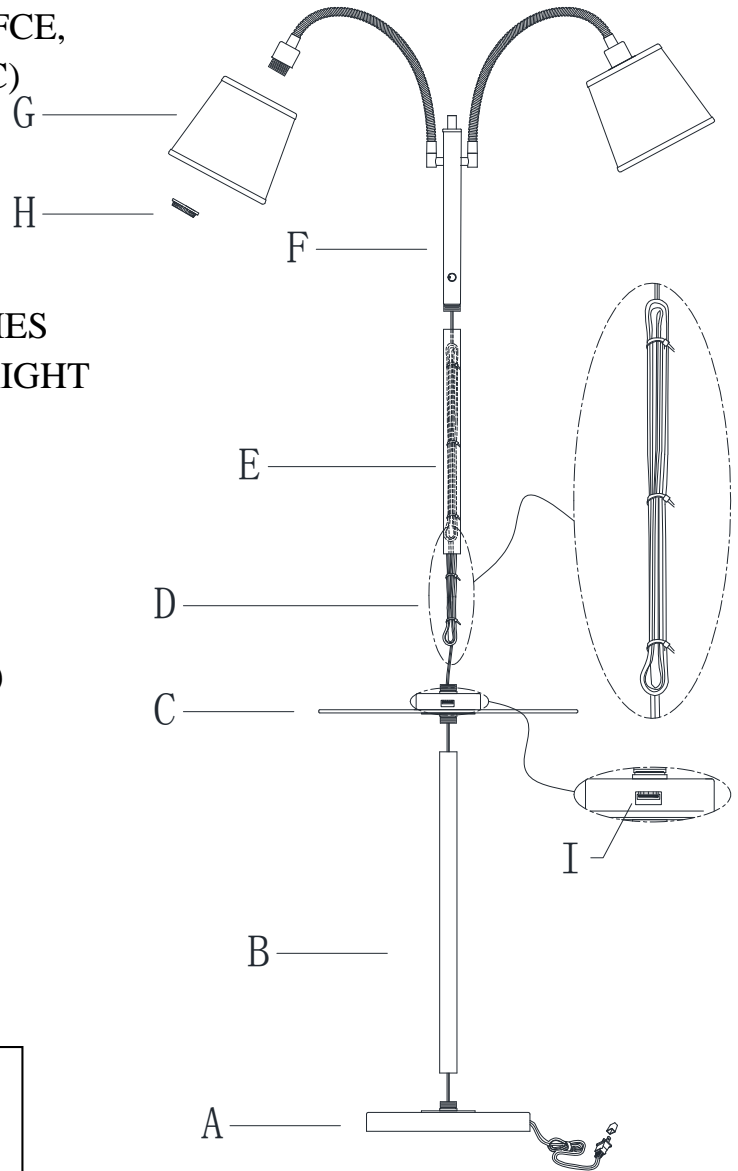

USE 40WX2 (MAXIMUM) TYPE A BULB (BULB NOT INCLUDED)

IMPORTANT SAFETY INSTRUCTIONS:

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.