


# ASSEMBLY INSTRUCTIONS

ITEM NO: BO-2615FL

1. CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE AND LAY THEM UP AS PER THE SKETCH.
2. SCREW TUBE SECTION (B) (C) (D), TUBE SECTION (E) AND SOCKET SECTION (F) INTO LAMP BASE (A) AND PULL WIRE OUT FROM LAMP BASE.
3. THEN SCREW THE SHORT END OF TUBE (G) INTO SOCKET SECTION (F).
4. PUT THE SHADE (H) ON THE THREADED TUBE (G), THEN PUT THE WASHER (I) (J) UPON IT.
5. PLACE THE FROSTED SIDE OF GLASS DIFFUSER (K) DOWNWARD ON WASHER (J), THEN PUT WASHER (L) UPON IT, SCREW WITH FINIAL (M) TIGHTLY, AND ADJUST THE LEVEL OF SHADE.

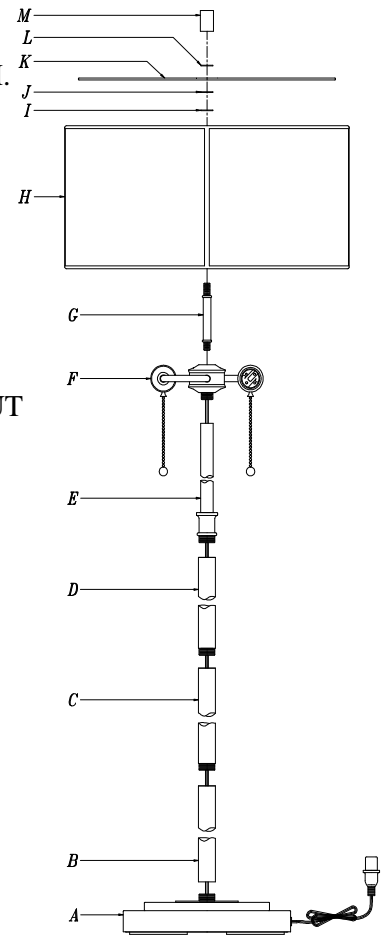

**WATTAGE: MAX 60W\*2 TYPE A  
( BULB NOT INCLUDED)**

## IMPORTANT SAFETY INSTRUCTIONS:

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

**SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.**