


ASSEMBLY INSTRUCTIONS

ITEM NO.: BO-2764FL

1. PLEASE CAREFULLY UNPACK THE BOX , PLACE ALL PARTS ON A FLAT SURFACE ACCORDING TO THE ILLUSTRATION.
2. SCREW TUBE SECTION (I) INTO TUBE (J)。
3. SCREW THREAD (H) INTO POLE (I) AND ATTACH BASE (G) TO TREAD (H) BY TIGHTENING WASHER (E,F) AND NUT (D) WITH SPANNER(C). KEEP THE SHADE AND THE BASE AT THE SAME DIRECTION. IF NOT, LOOSEN WASHER (F,E) AND NUT (D) AND ADJUST THE BASE (G), THEN TIGHTEN THEM AGAIN.
4. STICK THE PAD(B) TO THE BASE (G).
5. FIX THE SHADE(N) ONTO THE SOCKET(M) WITH RING (O) AND SOCKET RING (P).
6. SCREW PART(K) INTO THE ARM (L) .
7. LOOSEN THE KNOB(Q), AND FIX THE SHADE (N) AT A PROPRIATE ANGLE BY TIGHTENING THE KNOB(Q); LOOSEN KNOB (R) AND ADJUST HEIGHT OF THE FIXTURE, FIX THEM BY TIGHTENING THE KNOB (R).
8. INSTALL THE BULB AND INSERT THE PLUG INTO OUTLET, FINALLY TURN ON THE SWITCH AND ENJOY YOUR NICE LAMP.

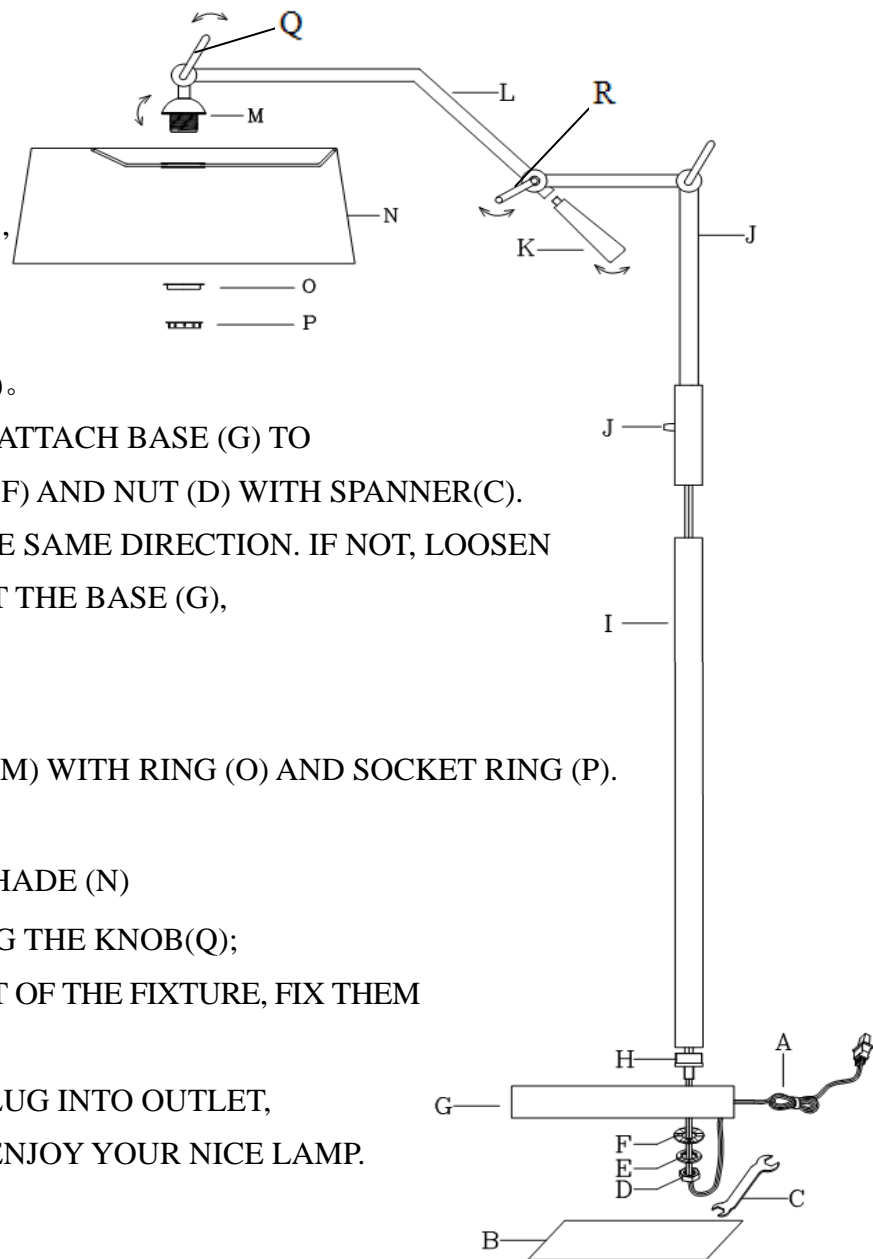

**USE 150 WATTAGE TYPE A BULB
(BULB NOT INCLUDED)**

IMPORTANT SAFETY INSTRUCTIONS:

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY AND EASILY INSERTED. DO NOT ATTEMPT TO ALTER THE PLUG.

- ※ PLEASE INFORM YOUR DEALER IMMEDIATELY IN CASE OF ANY PARTS SHORTAGE.
- ※ SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.