

ASSEMBLY INSTRUCTIONS

ITEM NO:FX-3726-1P

IMPORTANT SAFETY INSTRUCTIONS:

These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.


DIRECT WIRE FIXTURES:WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

TO ASSEMBLE:

Shut off the main electrical supply at fuse box/circuit breaker. Remove all parts form carton. Do not throw away any parts as shown.

1. Install the mounting bracket (A) to junction box with screw (B) .
- 2.Put the wire of the lighting fixture (G) through the canopy (D) and adjust the wire (G) to desired length and secure it with plastic clip (H) and screw (E).
- 3.Put the wire (G) through the bracket (A).
- 4.Connect the ground wires “ $\overline{\text{T}}$ ” to the supply wire “F” . Cathode wire ”N” in white to the supply wire,Anode wire Anode wire”L” in black to the supply wire in the junction box.Install canopy (D) to the bracket by screws (C) .
5. Align the mesh shade (J) ,plastic ring (K) and glass shade (L) to the socket (I) ,then using the socket ring (M) to tighten .
- 6.Install the bulb (N) (not included) .

**USE MAX 60 WATTAGE TYPE A OR T BULB
(NOT INCLUDED)**

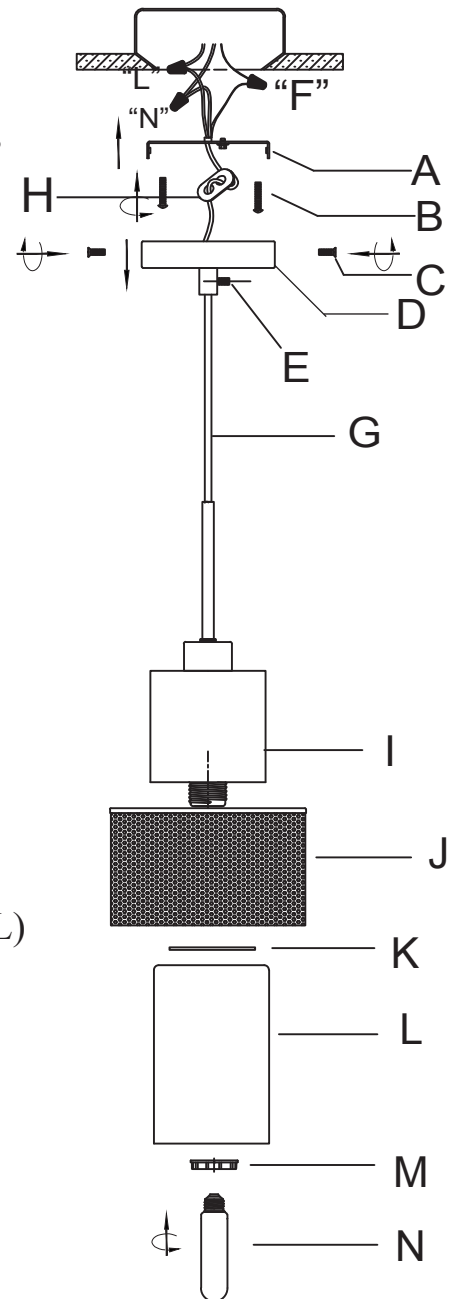

To clean, wipe the fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish .

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.