

ASSEMBLY AND INSTALLATION INSTRUCTION

For LED One Light W/Aircraft Cord

WARNING : Before starting installation, turn off power by removing fuses or turning off circuit breakers. Turning off the power by using the light switch is not sufficient to prevent electrical shock. If you feel you do not have electrical experiences needed, have the fixture installed by a qualified licensed electrician.

CAUTION : This is just an installation "guide ". Pls check with your local certified electrician for proper installation per your city code. We can not be held liable for the use or misuse of the installation guide provided.


Wiring :

1. Separate mounting strap from canopy by loosening knob.
2. Hold the canopy and mount strap securely to outlet box with 2 pcs of mounting screws provided.
3. Attach driver BK wire to Supply BK wire ; driver WH wire to Supply WH wire with wire connectors provided.
4. Attach Green Ground canopy wire and Supply Green Ground wire to Green Ground screw on strap.
5. Tuck extra wires carefully into box.
6. Fix the canopy to strap by rotating the knob on nipple until it is tight.
7. Turn on the power.


WARNING : Cord of the fixture is not allowed to cut.

To have your desired length of cord, just adjust the location of strain relief above the strap along the cord (See the picture on the right)


NOTE : Bulb is free of maintenance and requires no re-lamping.

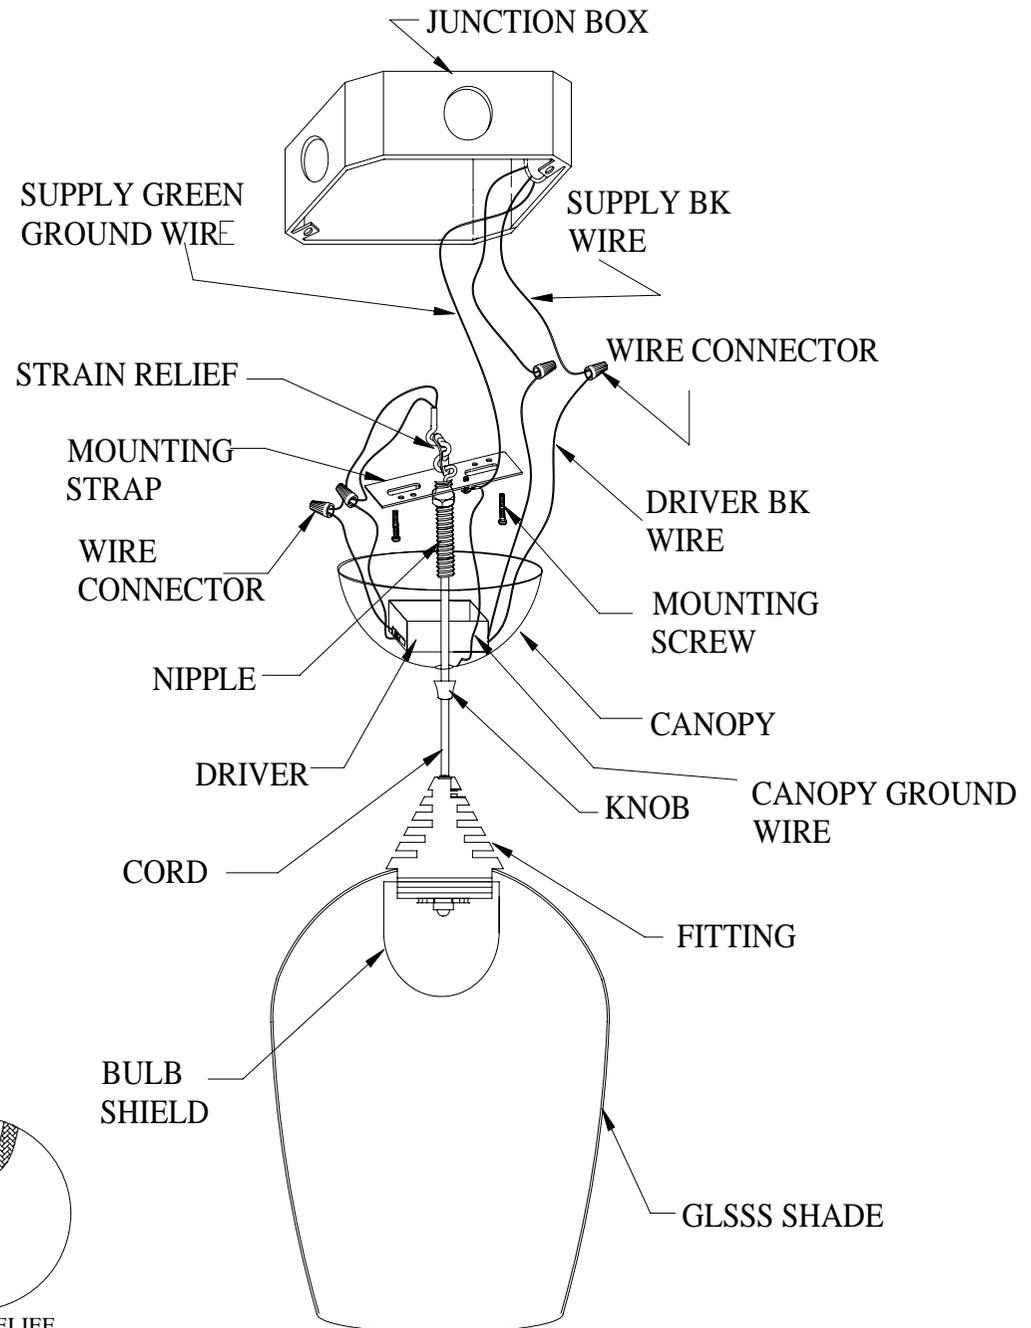

USE THE RUBBER RING TO HELPFULLY INSTALL THE GALSS BY BULB SHIELD TIGHTLY

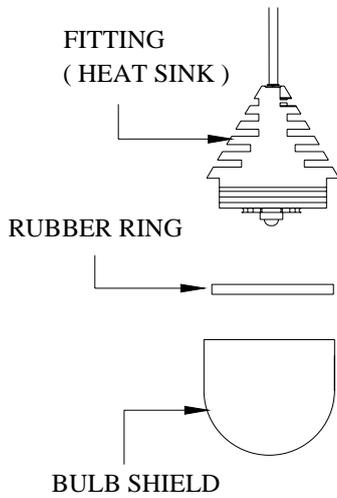

1. Remove the bulb shield and rubber ring from the heat sink (fitting) from the package.

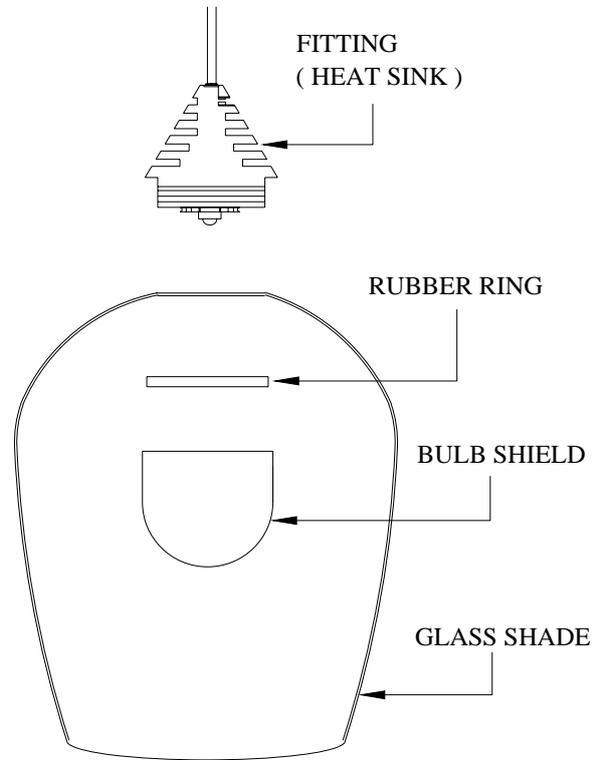

2. Put the heat sink (fitting) into the top hole of glass
3. Slide the heat sink (fitting) into the hole of rubber ring.
4. Install the bulb shield on the heat sink by rotation until glass is fixed tightly.