

**WARNING**

**DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.**

**CAUTION**

- TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES.
- INSTALLATION AND MAINTENANCE OF THIS UNIT REQUIRES AN ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.
- If an existing fixture is being replaced, remove it and note to which of the wires in the outlet box the fixture was attached. DO NOT SEPARATE ANY OTHER WIRES THAT MAY BE IN THE BOX. DO NOT DAMAGE THE INSULATION OF OLDER WIRING. In regular circumstances the BLACK wire will be the "Hot" lead and the WHITE wire will be the "Neutral" or "Common" lead. A GREEN or BARE COPPER wire is the "Ground". In older buildings it is always good practice to reconfirm the polarity of the wiring.
- FOR YOUR SAFETY, BE CERTAIN THAT ALL CIRCUIT BREAKERS CONTROLLING THE OUTDOOR LIGHTING AND EQUIPMENT ARE GFI BREAKERS.

NOTICE

- The important safeguards and instructions outlined on this sheet cannot cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care factors that cannot be built into any product. Caution and care must be supplied by the person(s) installing, operating and caring of this lighting fixture.
- This fixture is design to be mounted on a correctly installed standard round or octagon box or a through wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used. Directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.

INSTALLATION PREPARATION

1. Remove the fixture, shades, crystals and parts bag(s) from the carton.


NOTICE:

**Before discarding the carton,
double check to make certain that all parts are found .**

2. Remove the end balls under the edge of the roof.
Remove the cage and the glass.
3. Remove the mounting screws on the sides holding the mounting plate to the fixture.

FIXTURE INSTALLATION

1. Place the mounting plate against the wall.
Mark the location of the 4 anchor holes.
Drill holes for mounting. Insert the anchors.
2. To prevent water from flowing into the outlet box, put a bead of weatherproof caulking or silicone sealant around the edge of the outlet box. Leave $\frac{1}{2}$ " gap at the bottom of the back to allow condensed moisture to drain.

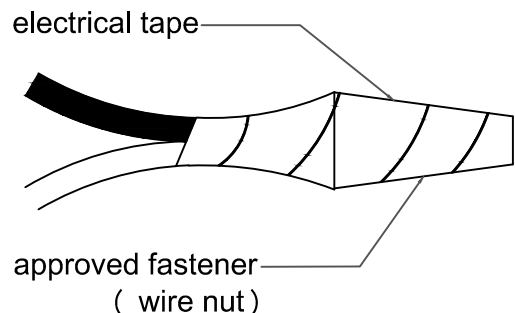**FIGURE-1**

3. Pull the leads in the box through the large hole in the mounting plate. Attach the mounting plate to the wall.
4. Fasten the ground wire to the green or bare copper wire in the outlet box or to the green screw on the mounting ring.



WARNING

Never fasten the ground wire to the black or "hot" wire! Failure to follow this instruction could result in serious injury or death!

5. Fasten the white fixture lead to the white wire in the outlet box. Fasten the wires together with an approved fastener (wire nut). Starting about 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. Refer to Figure-1 on the first page.



WARNING

Make sure that there is no exposed wire or strands that could cause a dangerous short circuit!

6. Connect the black fixture lead to the black wire in the outlet box. Fasten the joined wires as in step 5.
 7. Using the screws removed in the Installation Preparation Step 3, fasten the fixture to the mounting plate.
 8. Install the lamps (light bulbs).
- NOTE: This fixture has is rated for 60 watt type B, BA, C or CA lamp.



WARNING

DO NOT EXCEED RECOMMENDED WATTAGE!

9. Install the glass and cage.
10. Restore power to circuit at breaker or fuse box.

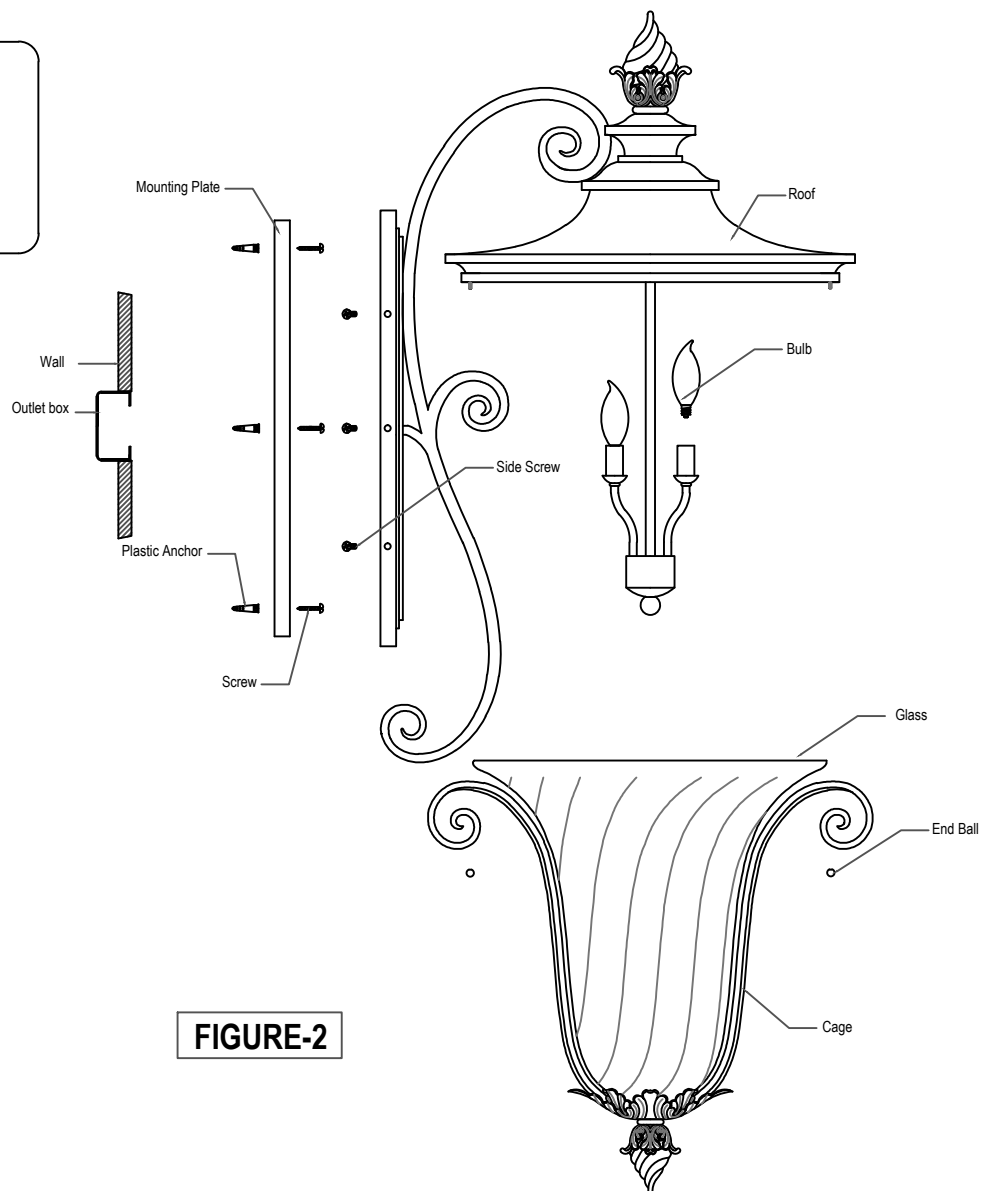


FIGURE-2