


95 Cantiague Rock Road Westbury .Ny11590

Phone:(516) 931-9090 Fax:(516)931-1254

ITEM NO:5760-AB/BU

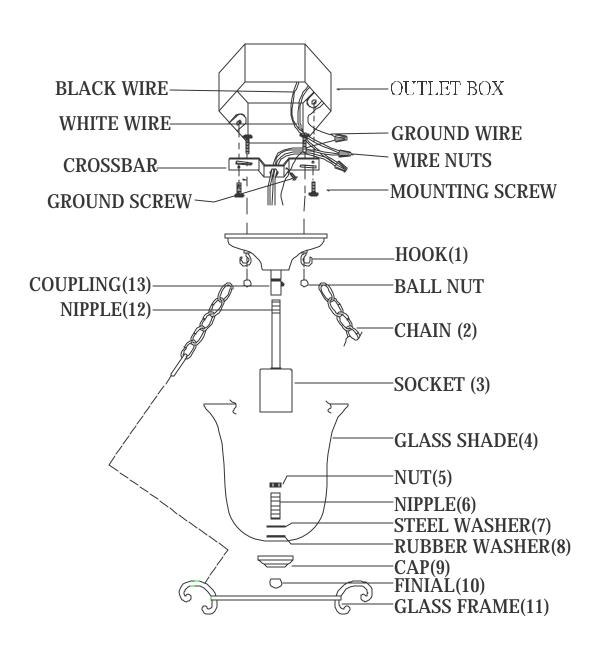

FIXTURE ASSEMBLY, MOUNTING, AND WIRING INSTRUCTIONS:

- 1. Carefully remove the fixture out of the carton and check that all parts are included, referring to the above illustration. Make sure that the electricity is turned off.
- 2. Thread 2 Mounting screws properly into the relevant mounting holes pre-drilled on the Cross bar;
- 3. Attach the Cross bar to outlet box using 2 Outlet box screws upwards;
- 4. Make wire connections:
- ----Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
- ----Attach ribbed wire from light to white wire from power source with a wire nut.
- ----Attach smooth wire from light to black wire from power source with a wire nut.
- 5. Tuck the wire connection neatly into the outlet box;
- 6. Attach the fixture body to the ceiling and let the 2 mounting screws protrude through the 2 pre-drilled keyholes on the Canopy, and fix it in place by Ball nuts;
- 7. Turn power on at fuse or circuit box.
- 8. Thread nipple(12)into coupling(13);
- 9. Thread nipple(6)into nut(5),then install steel washer(7), rubber washer(8),glass shade(4), cap(9)onto nipple(5), and secure it with finial(10);
- 10. Install body onto glass frame(11);
- 11. install the chain(2) onto hook(1)&glass frame(11);
- 12. The fixture is ready for lamping and installation!