


## LAUREN BROOKS™ SERIES

# LB250VZ The Bayhill™ Collection

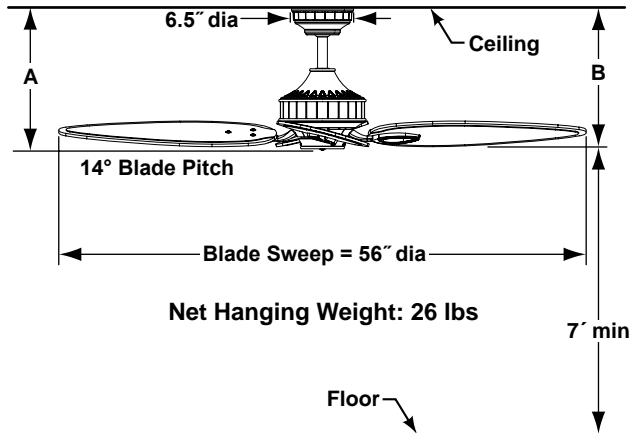

	A	B
Fan w/6\" downrod	15.00"	14.00"
Fan w/12\" downrod	21.00"	20.00"
Fan w/18\" downrod	26.00"	26.00"
Fan w/24\" downrod	32.00"	32.00"
Fan w/36\" downrod	45.00"	44.00"
Fan w/48\" downrod	57.00"	56.00"
Fan w/60\" downrod	69.00"	68.00"
Fan w/72\" downrod	81.00"	80.00"

### Available Finish

VZ	Venetian Bronze
----	-----------------

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

### BLADES:

A set of four cairo purple wood blades is included.

### CONTROL OPTIONS:

CW2WH 3-wire wall control is included. Wall control unit has 3 speeds and infinitely varying downlight controls. Optional CW1, CW1SW, CW5 and CWRL4 wall control, CRL4WH and CRL8TS hand-held remote control are available—sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available lighting options.

### DOWNROD OPTIONS:

Fan comes with a 1\" dia. x 6\" long downrod (DR1-6). Optional downrods available in 12\", 18\", 24\", 36\", 48\", 60\" and 72\" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6\" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry locations only.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	186	6471	88	0.62	73
Med-High	124	4218	119	0.43	36
Med	87	2844	151	0.31	19
Low	46	1224	183	0.18	7