




CUMULOS™

FP4820PW Ceiling Fan

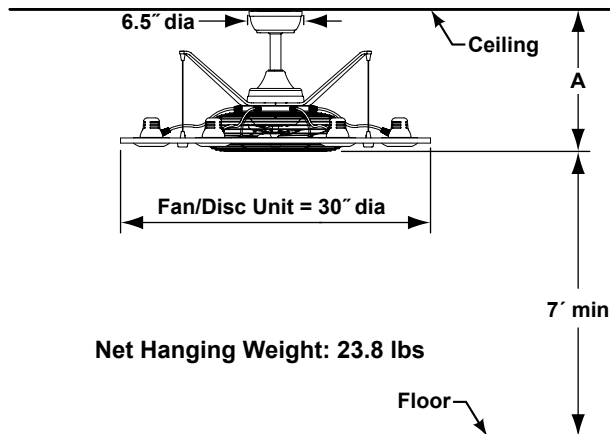

Available Finish	
PW	Pewter

	A
Fan w/6" downrod	14.00"
Fan w/12" downrod	20.00"
Fan w/18" downrod	26.00"
Fan w/24" downrod	32.00"
Fan w/36" downrod	44.00"
Fan w/48" downrod	56.00"
Fan w/60" downrod	68.00"
Fan w/72" downrod	80.00"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

90 x 25 motor is designed for optimal performance with this fan.

FAN SPEEDS:

High—1,442 rpm; Med—1,150 rpm; Low—990 rpm

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Optional C25 wall control is available—sold separately. Push button remote control has 3 fan speeds, infinite light levels and off button. Instructions are provided with each control.

LIGHTING OPTIONS:

Fan assembly features 6 downlights (GU10 base MR-16 bulbs, 25 watt max - included). Maximum downlight wattage not to exceed 150 watts.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope angles up to 52°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.