

INSTALLATION INSTRUCTIONS

For Model 2404-01


READ AND SAVE THESE INSTRUCTIONS

These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning installation of the lighting fixture. We strongly suggest that all direct wired fixtures be installed by a qualified, licensed electrician.

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

BEFORE INSTALLATION

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

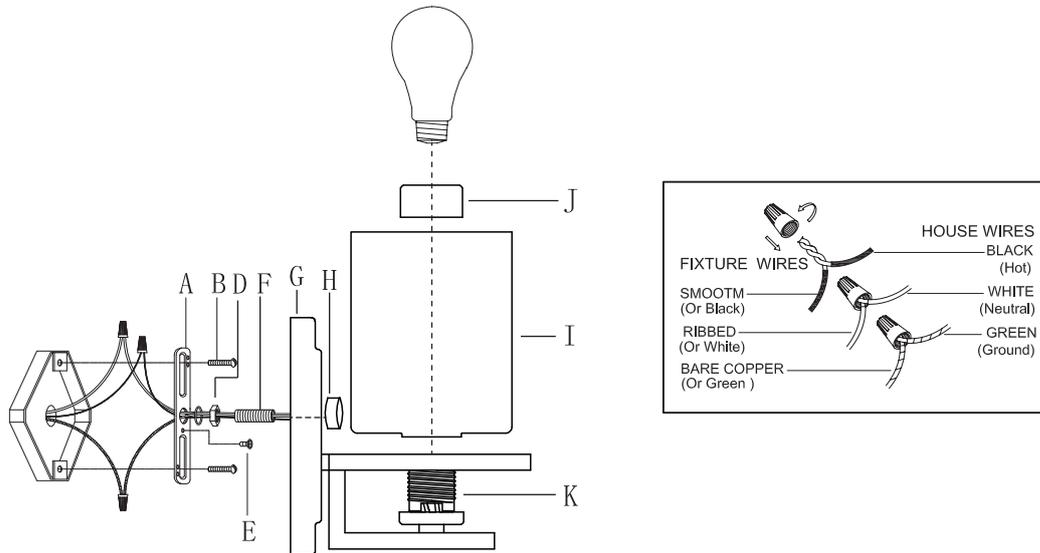

PREPARING FOR INSTALLATION

Remove all contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting bracket.

Remove the mounting bracket assembly from the bag. One end of nipple (F) should be attached to mounting bracket (A) with hex nut (D) in place. The other end should have deco nut (H) attached.

Attach mounting bracket (A) to the junction box by securely tightening the mounting screws (B). Unscrew deco nut (H) from nipple (F). Pass fixture's backplate (G) through the nipple (F) so that it is against the wall. Find ideal position of nipple (F) on the mounting bracket (A) so that deco nut (H) can be neatly attached to the backplate (G) when the backplate (G) is snugly placed against the wall. Once the ideal position of nipple (F) is established, secure its position by placing hex nut (D) right at the ideal spot.

CONNECTING THE WIRES

Feed the fixture's wires through nipple (F). Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (Green or copper) coming from the junction box, locate ground screw (E) on mounting bracket (A) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

FINISHING THE INSTALLATION

Place the fixture's backplate (G) over nipple (F) so that it protrudes through the hole in the front of the backplate. Thread deco nut (H) onto nipple (F). Twist until the backplate of the fixture is snugly against the wall. Secure glass (I) onto the socket (K) by screwing socket ring (J) tight. Install light bulb (not included) in accordance with the fixture's specifications. Do not exceed the recommended maximum wattage.

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.