









Fixture Name: Valencia 2049-9 FB

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.


PARTS LIST		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Canopy (G) 1ea 5.2" Dia*1.1" 	Hex Nut (B) 2ea 3/8"*H3mm 	Nipple (C) 1ea 3/8"*H45mm 	
Chain 1ea 6FT*Φ4.2mm 	Threaded Ring (H) 1ea Φ23-16T*H5mm 	Junction Box Screw (E) 2ea #8-32N*H32mm 	
Chain Connector (I) 2ea Φ4*H55mm 	Screw Collar Loop (F) 1ea 3/8"*H42.4mm 	Wire Connectors 3ea P3 	
Mounting Strap (D) 1ea 3/4"*1" 	Green Ground Screw 1ea #8-32N*H10mm 	Center Column (L) 1ea W32xH95mm 	
Top Loop (J) 1ea W44*H69mm 	Crystal (S) 9ea W21*75Lmm 	Threaded Rod (N) 1ea 3/8"*H440mm 	
Bottom Cap (P) 1ea W38*H22mm 	Finial (R) 1ea W27xH37mm 	Glass 4ea W135*H415mm one smaller 	
Part Needed _____	Quantity _____		
Part Needed _____	Quantity _____		
Reason why _____	(missing, scratched, broken glass, bent, bad finish)		
Comments _____			

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. Remove the Top cap (K) off the center column, slide the three glass panels (M) down through the top of the Glass cage and secure with metal clips.
2. Replace the top cap, open the door to place the smaller glass panel (M), secure with clips.

NOTE: INSTALL THE GLASS ASSEMBLY BEFORE THE FIXTURE IS HUNG.

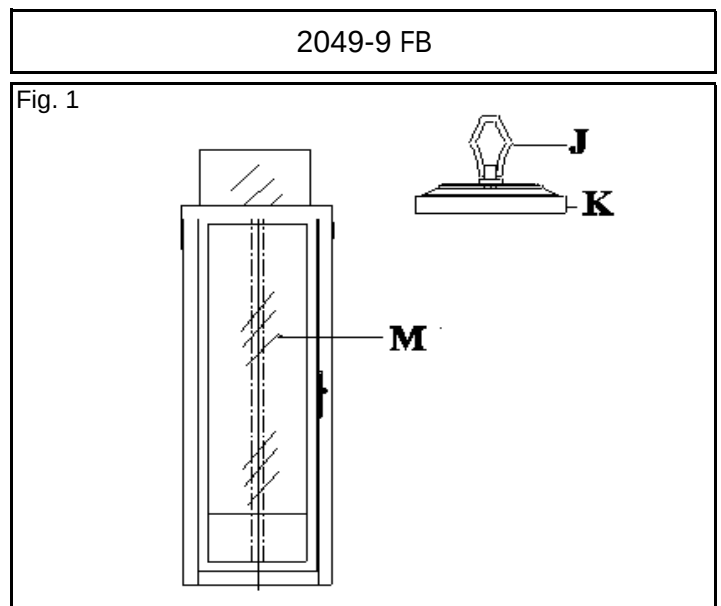

For Customer Service, contact the place of purchase to arrange for replacement parts.

PARTS & ASSEMBLY SHEET

Fixture Name: Valencia 2049-9 FB

ASSEMBLING THE FIXTURE (Fig. 2)

3. Place and tighten the Threaded Nipple (N) on top of hex nut (O).

4. Then slide the Box (X), Lids (T), Center Column (L) along with the glass cage (K) on top of each other accordingly. Settle the Top cap in place.

5. Then tighten everything together with the Top Loop (J).

NOTE: SOME ADJUSTMENT MAYBE NEEDED ON THE DECORATIVE METAL SCROLLING OF THE ARMS. THESE ARE FLEXIBLE, BEND GENTLY TO DESIRED SHAPE.

6. By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain then remove the excess Chain and discard it.

7. Use one Chain Connector (I) to attach one end of the Chain to the Top Loop (J) and close the Chain Connector (I)

8. Feed the fixture wires through the Chain (every three links) and pull the wires until taut.

9. Slip Canopy Loop Collar (F) over the chain, and then do the same with the Canopy (G).

10. When ready to complete the installation, Use the other chain connector and attach the other end of the chain to the Canopy Loop (I) and close the chain connector.

11. Feed the wires through Canopy Loop (J) and Nipple (C) and pull until taut.

* You may now install the fixture.


12. Slide the Candle sleeves (R) on the sockets, then hang the Crystals (S).

13. Place the Bottom cap (P) over the nipple at fixture base and secure in place with the Finial (Q).

14. Install the light bulbs in accordance with the fixture's specifications.

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING)

Fig 2

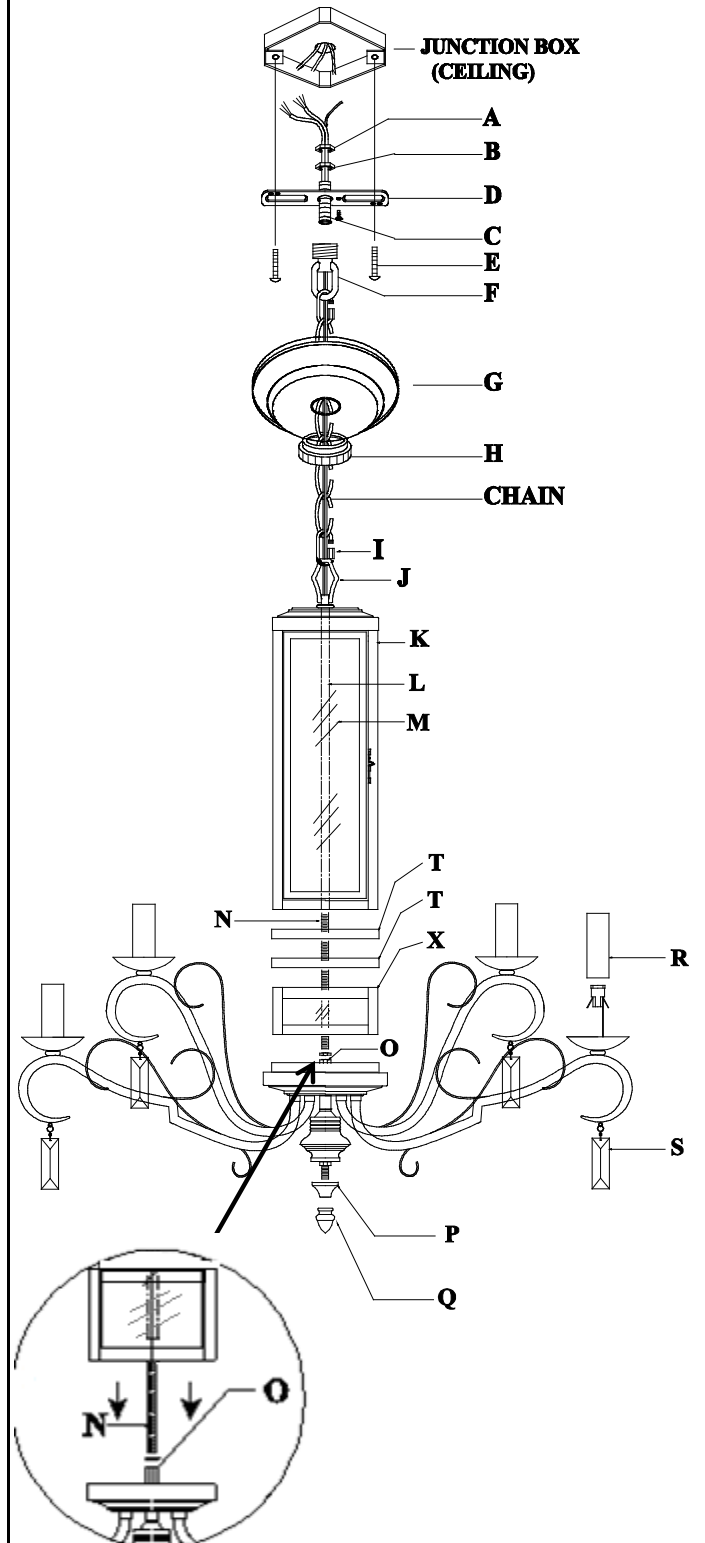


WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
3. Thread Nipple(C) into Canopy Loop (F) until snug.
4. Thread other end of the Nipple (C) with Canopy Loop attached into Mounting Strap (D).
5. Place Lock Washer (B) over end of Nipple (C) protruding through Mounting Strap (D) and thread Hex Nuts (A) onto Nipple until tight.
6. Take this mounting strap assembly and mount to ceiling junction box with Mounting screws (E). Tighten screw securely with screw driver.
7. Unscrew the Canopy loop collar(H) from the Canopy loop. Take the canopy and pass over the Canopy loop. approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. *the Canopy loop collar should fit snugly on the Canopy loop after the canopy is installed. Remove Canopy and Canopy lock collar.
8. Assemble the fixture and have an assistant or secure support hold the weight of the fixture while you complete the wiring connections.
9. Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.

Fig. 1

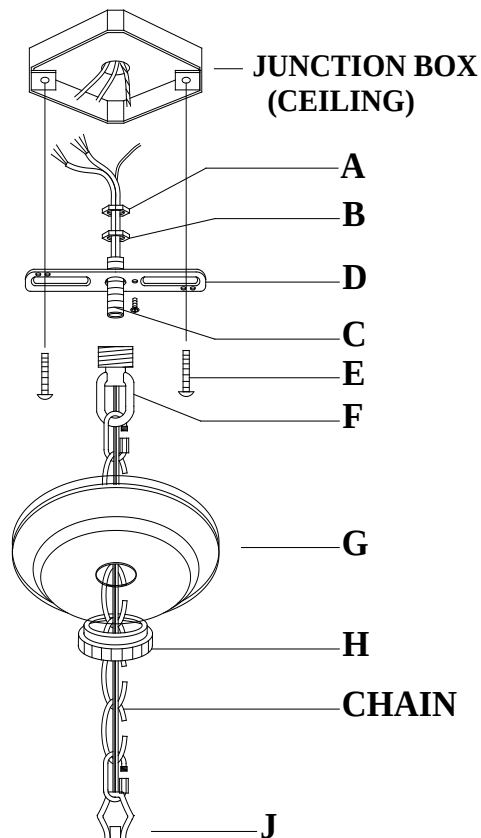


CONNECTING THE WIRES (Fig 2)

10. Attach the power supply wires to the fixture lead wires by connecting **BLACK** to **BLACK** (or **SMOOTH**) and **WHITE** to **WHITE** (or **RIBBED**).
 11. Attach the **GROUND** wire(**GREEN** or **COPPER**) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.
- NOTE:** Twist the wires together in the same direction you twist the wire connector onto the wires.
12. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION

13. Raise the Canopy (G) to the ceiling. Secure in place by tightening the Canopy Loop Collar (H) onto the Canopy Loop (F).

Fig. 2

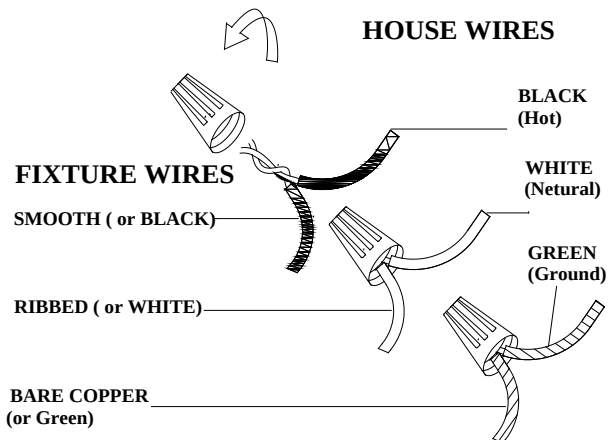

**YOUR INSTALLATION IS NOW COMPLETE.
RETURN POWER TO THE JUNCTION BOX AND
TEST THE FIXTURE.**