

Fixture Name: Lancaster 6005-FM AB


This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

## PARTS LIST


Company Name: \_\_\_\_\_ Co. Account #: \_\_\_\_\_  
to be filled out by retailer

Mounting strap  
(circular)



1ea 4" x 3"

Wire connectors



2ea P3 Orange

Deco Nut




2ea 9 x 9.5mm

Hex Nut




2ea 3/8" x 4mm

Green Grounding  
Screw




1ea 8/32" x 10mm

Bottom Cap




1ea 70 x 23mm

Junction Box  
Screw




2ea 8/32" x 1"

Mounting Screw



2ea 5/32" x 30mm

Threaded Rod



1ea 3/8" x 130mm

Flat Washer



2ea 1" x 3mm

Finial



1ea 3/8" x 40mm

Part Needed \_\_\_\_\_

Quantity \_\_\_\_\_

Part Needed \_\_\_\_\_

Quantity \_\_\_\_\_

Reason why (missing, scratched, broken glass, bent, bad finish)

Comments \_\_\_\_\_

## FIXTURE ASSEMBLY INSTRUCTIONS


**Read and review installation instruction sheet before assembling the fixture.**

1. Thread the Threaded Rod (G) onto the socket assembly coupler. Secure with a hex nut.
2. Install the light bulbs in accordance with the fixture's specifications.  
(DO NOT EXCEED MAXIMUM WATTAGE RATING)
3. Slide the Flat Washer (I), Glass Shade (H) and Flat Washer (I) onto Threaded Rod (G). Tighten with Hex Nut (J).
4. Slide Bottom Cap (K) onto Threaded Rod (G) and tighten with Finial (L).

**NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.**

6005-FM

Fig. 1

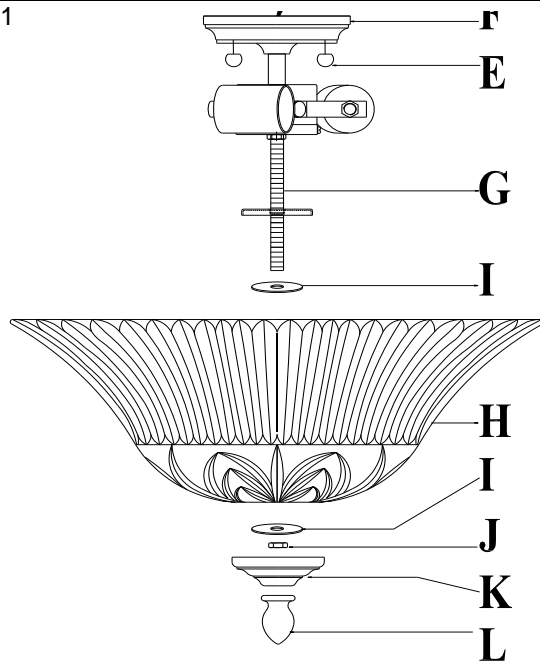

For Customer Service, contact the place of purchase to arrange for replacement parts.

## **WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.**

### **HANGING THE FIXTURE (Fig. 1)**

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. The Mounting Strap (B) contains several pairs of threaded holes. Find the pair of holes that matches the holes spacing in your Canopy (F) and thread the two Mounting Screws (A) halfway into the Mounting Strap (B).
4. Place the Mounting Strap (B) over the junction box so the Mounting Screws (A) are vertical.
5. Attach the Mounting Strap (B) to the junction box by using the two Mounting Screws (C). Tighten the screws securely.

### **CONNECTING THE WIRES (Fig. 2)**

6. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wires until snug.
7. Repeat same process with white junction box wire and ribbed wire of fixture.

NOTE: Twist wires together in the same direction you twist the wire connector onto wires.

8. If your junction box has a grounding wire (green or bare copper), attach this wire and the bare copper wire from the fixture together as in step 7. If junction box has no ground wire, attach the bare copper fixture wire to the junction box with a screw.
9. Tuck these wire connections neatly into the junction box.

### **FINISHING THE INSTALLATION (Fig. 3)**

10. Place the fixture's Canopy (F) over the Mounting Strap (B) and over the Mounting Screws (A). Adjust the fixture canopy until the Mounting Screws (A) protrude out from the canopy. Secure the fixture against the ceiling by threading the Decorative Nuts (E) on until tight.
11. Install the light bulbs and glass shade according to the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

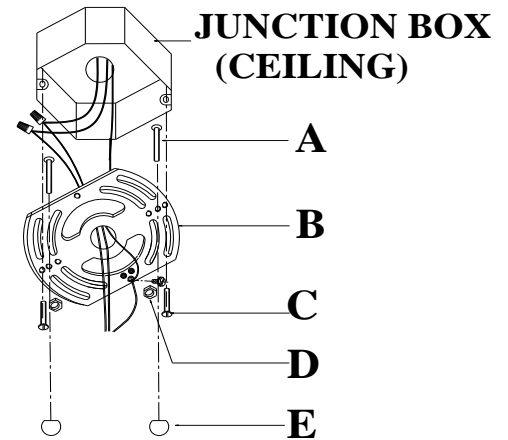


Fig. 2

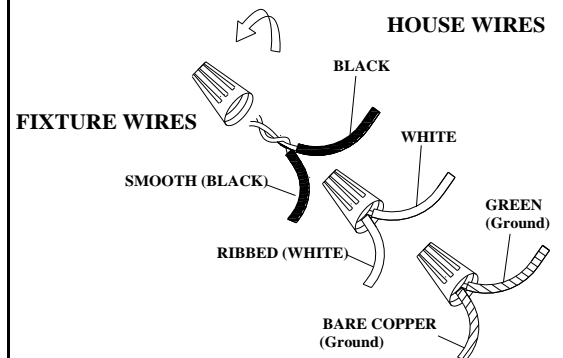


Fig. 3

