












PARTS & ASSEMBLY SHEET

Fixture Name: Cirque Silhouette 6013-MIL CIR

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name: _____ Co. Account #: _____ below to be filled out by retailer	
 Mounting Strap w/ ground screw 1 ea 4"*3"*H1.5mm	 Canopy 1 ea 4.5"*4.5"*H0.5"	 Universal Joint 1 ea 3/8"*H57mm	
 Deco Nut 2 ea 5/32"*9mm	 Outer Small Glass Panel (G6013-M4565 CIR) 2 ea 165*115*5mm 4.5"W x 6.5"H x .2"E	 Outer Large Glass Panel (G6013-M565 CIR) 2 ea 165*127*5mm 5"W x 6.5"H x .2"E	
 Rod Nipple 4ea Ø3/8"*H25mm	 Rod (H) (ROD-12 CH) 3ea Ø1/2"*H12"	 Rod (H) (ROD-6 CH) 1ea Ø1/2"*H6"	
 Finial 4 ea 3/8"*H8mm	 Spacer 4 ea Ø6.5"H37mm	 Socket Spacer 1 ea Ø49"H25mm	
 Small Plastic Washer 4 ea Ø8"H1mm	 Junction Box Screw 2ea #8-32N*25mm	 Wire Connector 3 ea P3 Orange	
 Mounting Screw 2 ea 5/32"*Ø8mm	 Hex Nut 2 ea 5/32"*H3mm	 Plastic Washer 4 ea Ø16"H1mm	
Part Needed _____ Part Needed _____ Reason why (missing, scratched, broken glass, bent, bad finish) Comments _____			Quantity _____

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

6013-M1L CIR

For Customer Service, contact the place of purchase to arrange for replacement parts.

Cirque Silhouette 6013-MIL CIR

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. Thread the two fixture Mounting Screws (A) into the Mounting Strap (B) spaced the same distance apart as the holes in the Canopy (E). Secure in place with the Hex Nuts (D).
4. Attach the Mounting Strap (B) to the Junction Box using the two Mounting Screws (C).

CONNECTING THE WIRES (Fig.2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED) .
6. Attach GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the Green Ground Screw on the Mounting Strap (B) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

7. Tuck these wire connections neatly into the ceiling Junction Box.

FINISHING THE INSTALLATION

8. Place the fixture's Canopy (E) over the Mounting Strap (B) and over the Mounting Screws (A), adjust the fixture Canopy (E) until the Mounting Screws (C) protrude out from the Canopy (E) and secure the fixture against ceiling by threading the Deco Nut (F) until tight.
9. Install the light bulbs and glass panels as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

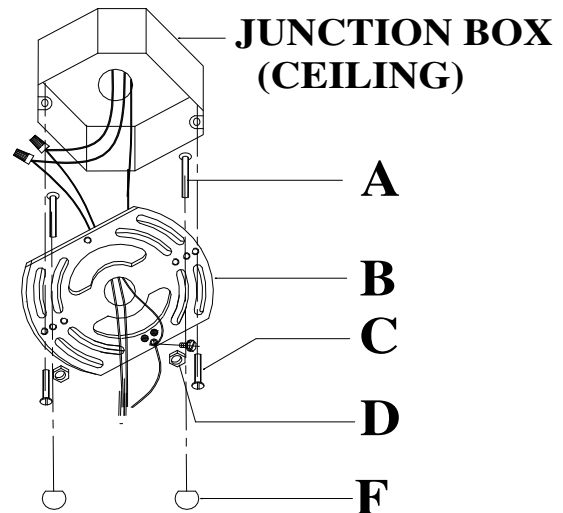


Fig. 2

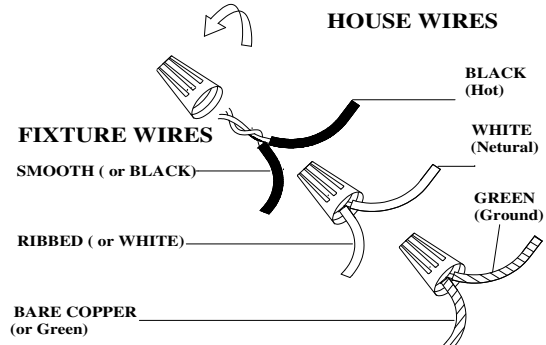


Fig. 3

