



















PARTS & ASSEMBLY SHEET

Fixture Name: **Ravenea Silhouette 6013-MIL RAV**

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name: _____ Co. Account #: _____ below to be filled out by retailer	
 Mounting Strap w/ ground screw 1 ea 4"*3"*H1.5mm	 Canopy 1 ea 4.5"*4.5"*H0.5"	 Universal Joint 1 ea 3/8"*H57mm	
 Deco Nut 2 ea 5/32"*9mm	 Outer Small Glass Panel (G6013-M4565 RAV) (M) 2 ea 165*115*5mm 4.5"W x 6.5"H x .2"E	 Outer Large Glass Panel (G6013-M565 RAV) (X) 2 ea 165*127*5mm 5"W x 6.5"H x .2"E	
 Rod Nipple 4ea Ø3/8"*H25mm	 Rod (H) (ROD-12 CH) 3ea Ø1/2"*H12"	 Rod (H) (ROD-6 CH) 1ea Ø1/2"*H6"	
 Finial 4 ea 3/8"*H8mm	 Spacer (U) 4 ea Ø6.5"H37mm	 Socket Spacer (1 ea Ø49"H25mm	
 Small Plastic Washer (T) 4 ea Ø8"H1mm	 Junction Box Screw 2ea #8-32N*25mm	 Wire Connector 3 ea P3 Orange	
 Mounting Screw 2 ea 5/32"*Ø8mm	 Hex Nut 2 ea 5/32"*H3mm	 Plastic Washer (V) 4 ea Ø16"H1mm	
Part Needed _____ Part Needed _____ Reason why (missing, scratched, broken glass, bent, bad finish) Comments _____			Quantity _____

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

6013-M1L RAV

For Customer Service, contact the place of purchase to arrange for replacement parts.

PARTS & ASSEMBLY SHEET

Ravenea Silhouette 6013-MIL RAV

Assembling the Fixture (Fig 1)

1. By measuring determine correct number of rods needed for proper hanging height.
This fixture contains 3 rods x(12") and 1 rod x(6").
First decide the height required and thread the Rod Nipple (I) to the Fixture Coupler (J), and thread the Rod (H) to Rod Nipple (I). Redo this step for the rest of required Rods.
 2. After the Rods are assembled to the desired height feed the fixture wires through Rod (H) and Universal Joint (G) and pull until taut.
 3. Connect Rod Nipple (I) to Universal Joint (G).
- * You may now install the fixture. See Installation Instructions page. -- If you install the glass panels before hanging the fixture use care to not damage the glass.

Securing the Glass Panels (Fig. 2)

Note: This fixture contains two different sizes of outer glass panels:

Outer Large Glass Panel (X). Glass Size:165*127*5mm
Outer Small Glass Panel (N). Glass Size: 165*115*5mm
To prevent any mistake, measure the glass panels before installing. and make sure the same size of glass panels must be installed in the opposite position.

4. Put the Spacer (U), Small Plastic Washer (T) and Large Glass Panel (N) onto the Nipple (M), and tighten with Plastic Washer (V) and Finial (K).
5. Redo above step for the Small Glass Panel (M) in the 90° position. Repeat untill all four sides are completed.
6. Place the glass shade (P) over the threaded socket (W) and place the Socket Spacer (R) onto the threaded socket (W) and secure both by threading the Socket ring (Q) until tight.
*A socket Tool (S) has been included to assist if the glass is too narrow to finger tighten the socket Ring (Q).
6. Install light bulb in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING!)

Fig 1


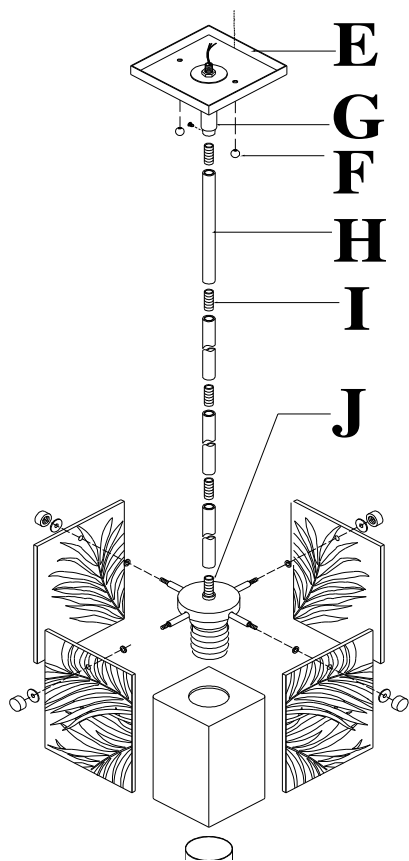


Fig 2

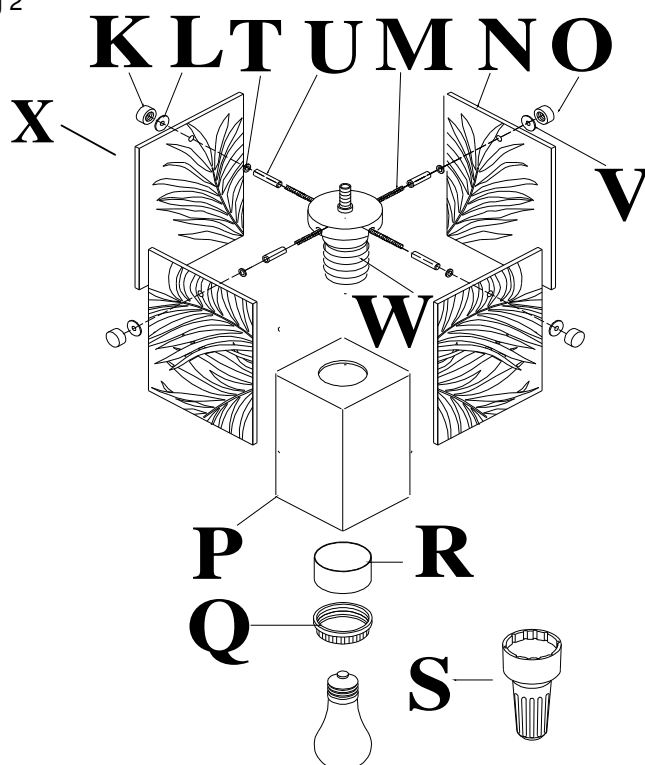

For Customer Service, contact the place of purchase to arrange for replacement parts.

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. Thread the two fixture Mounting Screws (A) into the Mounting Strap (B) spaced the same distance apart as the holes in the Canopy (E). Secure in place with the Hex Nuts (D).
4. Attach the Mounting Strap (B) to the Junction Box using the two Mounting Screws (C).

CONNECTING THE WIRES (Fig.2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED) .
6. Attach GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the Green Ground Screw on the Mounting Strap (B) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

7. Tuck these wire connections neatly into the ceiling Junction Box.

FINISHING THE INSTALLATION

8. Place the fixture's Canopy (E) over the Mounting Strap (B) and over the Mounting Screws (A), adjust the fixture Canopy (E) until the Mounting Screws (C) protrude out from the Canopy (E) and secure the fixture against ceiling by threading the Deco Nut (F) until tight.
9. Install the light bulbs and glass panels as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

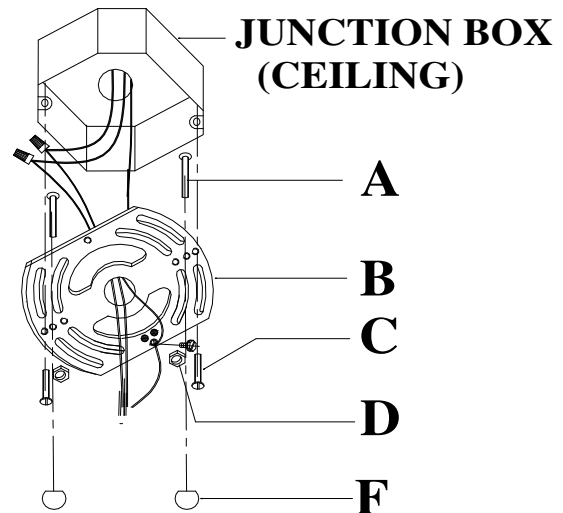


Fig. 2

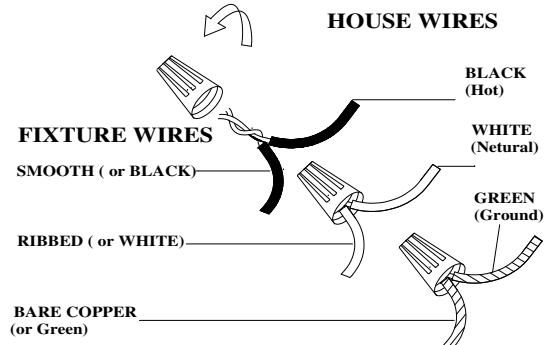


Fig. 3

