





















PARTS & ASSEMBLY SHEET

Fixture Name: Cirque Silhouette 6013-PEN CIR

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name: _____ Co. Account #: _____ below to be filled out by retailer	
Mounting Strap  1 ea 4"*3"*H1.5mm	Canopy  1 ea 4.5"*4.5"*H0.5"	Universal Joint  1 ea 3/8"*H57mm	
Inner Small Glass Panel  2 ea 247*120*5mm (R)	Outer Small Glass Panel (G6013-P697 CIR)  2 ea 247*160*8mm 6.37"W x 9.75"H x .25"E (S)	Outer Large Glass Panel (G6013-P797 CIR)  2 ea 247*177*8mm 7"W x 9.75"H x .25"E (P)	
Inner Large Glass Panel  2 ea 247*132*5mm (N)	Rod (H) (ROD-12 CH)  3ea Ø1/2"*H12"	Rod (H) (ROD-6 CH)  1ea Ø1/2"*H6"	
Finial  4 ea 3/8"*H8mm	Long Spacer  4 ea Ø12*H38mm (L)	Short Spacer  4 ea Ø12*H13mm (L)	
Green Ground Screw  1 ea #8-32n*10mm	Junction Box Screw  2ea #8-32N*25mm	Wire Connector  3 ea P3 Orange	
Mounting Screw  2 ea 5/32"*28mm	Hex Nut  2 ea 5/32*H3mm	Plastic Washer (L)  16ea Ø16*H1mm	
Rod Nipple  4ea Ø3/8"*H25mm	Deco Nut  2 ea 5/32"*9mm		
Part Needed _____ Part Needed _____ Reason why (missing, scratched, broken glass, bent, bad finish) Comments _____			Quantity _____

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

6013-PEN CIR

For Customer Service, contact the place of purchase to arrange for replacement parts.

PARTS & ASSEMBLY SHEET

Cirque Silhouette 6013-PEN CIR

Assembling the Fixture (fig 1)

1. By measuring determine correct number of rods needed for proper hanging height.

This fixture contains 3 rods x(12") and 1 rod x(6").

First decide the height required and thread the Rod Nipple (I) to the Fixture Coupler (J), and thread the Rod (H) to Rod Nipple (I). Redo this step for the rest of required Rods.

2. After the Rods are assembled to the desired height feed the fixture wires through Rod (H) and Universal Joint (G) and pull until taut.

3. Connect Rod Nipple (I) to Universal Joint (G).

* You may now install the fixture. See Installation Instructions page. -- If you install the glass panels before hanging the fixture use care to not damage the glass.

Securing the Glass Panels (Fig. 2)

Note: This fixture contains two different sizes of outer and inner glass panel:

Inner Large Glass Panel (N). Glass Size:247*132*5mm

Inner Small Glass Panel (R). Glass Size: 247*120*5mm

Outer Large Glass Panel (M). Glass Size: 247*177*8mm

Outer Small Glass Panel (S). Glass Size: 247*160*8mm

To prevent any mistake, measure the glass panels before installing. and make sure the same size of glass panels must be installed in the opposite position.

4. Put the Long Spacer (L), Plastic Washer (M) and Inner Large Glass Panel (N) onto the Nipple (K), and again put the Plastic Washer (M), Short Spacer (O), Plastic Washer (M), and Outer Large Glass Panel (P) and tighten with Plastic Washer (M) and Finial Q).

5. Redo above step for the Outer Small Glass Panel (S) and Inner Small Glass Panel (R) in the 90° position.

6. Install light bulb in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING!)

Fig 1


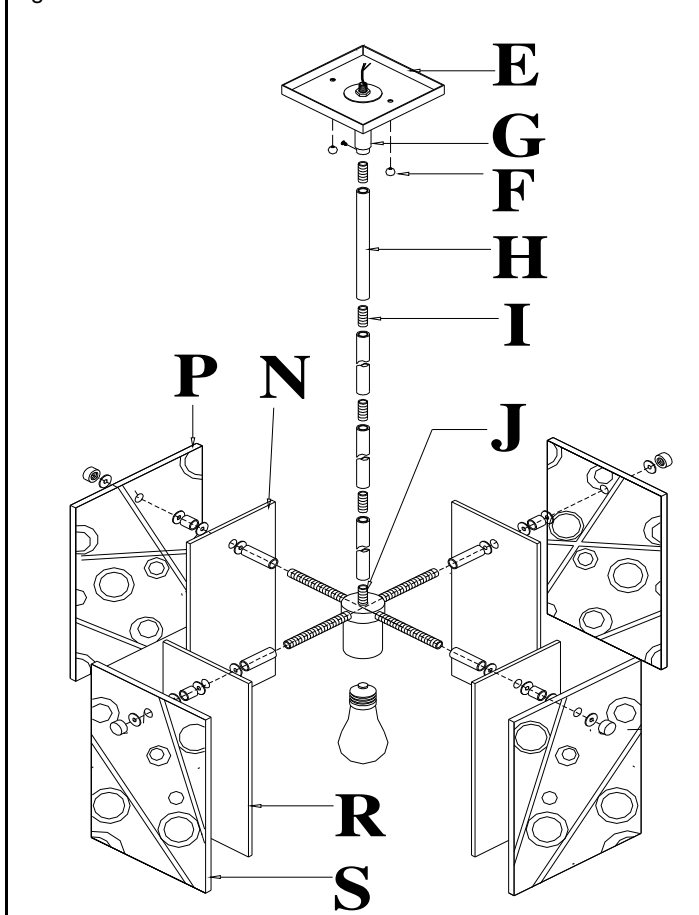


Fig 2

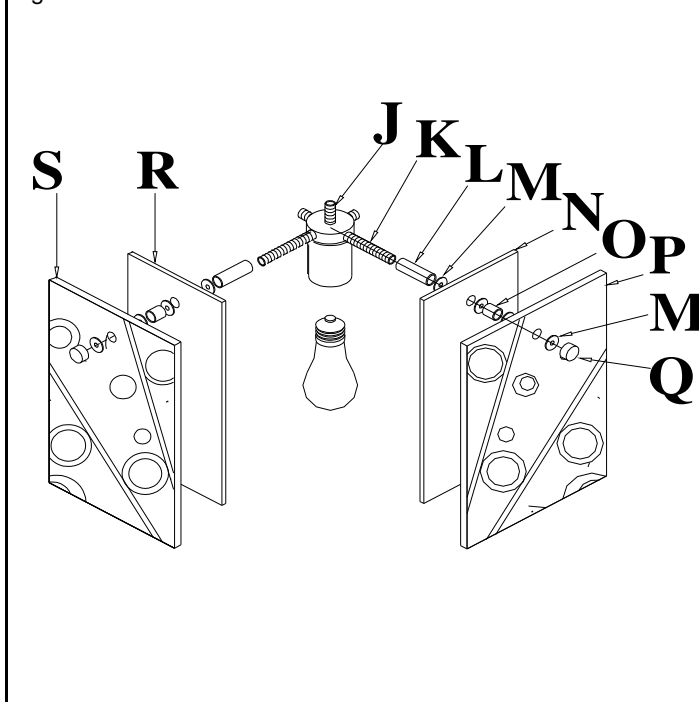

For Customer Service, contact the place of purchase to arrange for replacement parts.

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. Thread the two fixture Mounting Screws (A) into the Mounting Strap (B) spaced the same distance apart as the holes in the Canopy (E). Secure in place with the Hex Nuts (D).
4. Attach the Mounting Strap (B) to the Junction Box using the two Mounting Screws (C).

CONNECTING THE WIRES (Fig.2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED) .
6. Attach GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the Green Ground Screw on the Mounting Strap (B) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

7. Tuck these wire connections neatly into the ceiling Junction Box.

FINISHING THE INSTALLATION

8. Place the fixture's Canopy (E) over the Mounting Strap (B) and over the Mounting Screws (A), adjust the fixture Canopy (E) until the Mounting Screws (C) protrude out from the Canopy (E) and secure the fixture against ceiling by threading the Deco Nut (F) until tight.
9. Install the light bulbs and glass panels as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

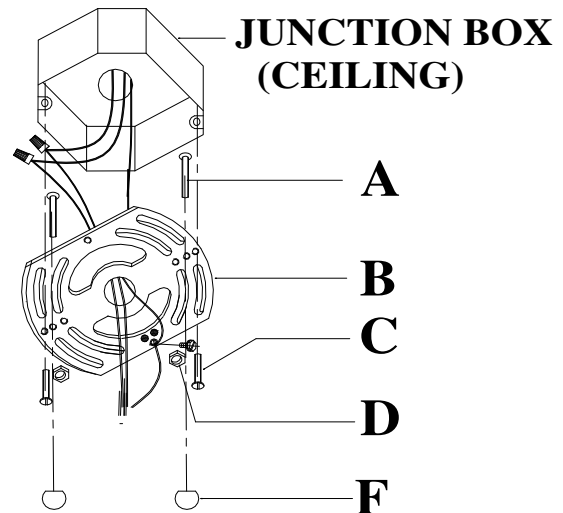


Fig. 2

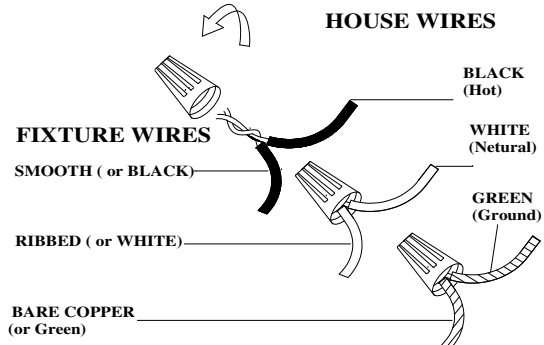


Fig. 3

