

Fixture Name: Mayfair 7116-WSC LC

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Mounting Strap 1ea 4-1/8-IP*H2mm		Mounting Screws 2ea 8#32-IP*1"	
Wire connectors 3ea P3 Orange		Nipple 1ea 1/8-27-IP*1-3/4"	
Nipple (17) 1ea 1/8-27-IP*2-1/8" *may have washers, hex nuts attached		Bottom Cap 1ea Ø3-1/4"*H1-3/4"	
Deco Screw 2ea 5/32-IP*9MM		Rubber Washer 2ea Ø14mm	
Part Needed _____		Quantity _____	
Part Needed _____		Quantity _____	
Reason why _____	(missing, scratched, broken glass, bent, bad finish)		
Comments _____			

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet, but do not install before assembling the fixture.

1. Thread on the nipple (17) in this order: hex nut, metal washer (18), plastic washer (19), glass shade (16) thread the nipple through the hole in bottom of glass shade, plastic washer, metal washer, hexnut (20), bottom cap (21) and secure in place with the Finial (22).

2. Install the light bulb in accordance with the fixture's specifications.
(DO NOT EXCEED MAXIMUM WATTAGE RATING)

3. Unscrew the Deco screws (24) and Rubber washers (23) from fixture backplate.

*Place the scroll arm (25) against the side of Glass shade (16) with the small rubber washer between the arm and glass.


*Insert the Deco screw (24) through the hole, hold glass up to the installed backplate(15) and secure by threading the Deco screw (24) into the side of backplate.

*Continue to hold glass and repeat with the other side.

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

7116-WSC LC

Fig 1

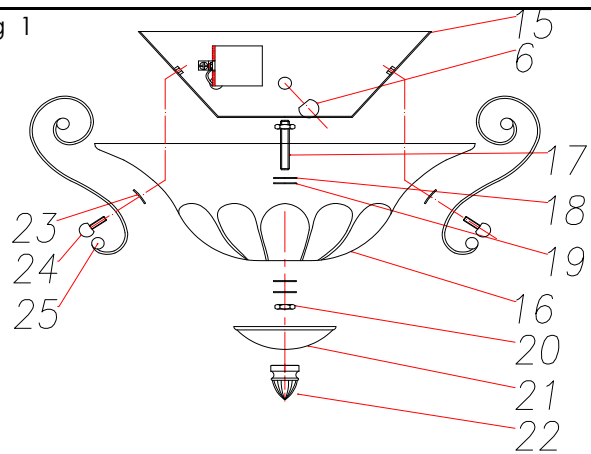

INSTALLATION INSTRUCTIONS

Fixture Name: Mayfair 7116-WSC LC

For Wall Mount Light Fixture

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. Take Threaded Rod (D) from parts bag and thread into center screw hole on Mounting Strap (A), tighten with Hex Nut (B) and Spring Washer (C).
4. Attach the Mounting Strap (A) to the Junction Box (I) using the two Mounting Screws (E). Tighten the screws securely.

CONNECTING THE WIRES (Fig. 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
 6. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (A) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
7. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig. 3)

8. Place the fixture Back Plate (15) over the Threaded Rod (D), so it protrudes through the hole in the Back Plate (15).
9. Thread the Metal Cap Nut (6) onto the Threaded Rod (D) and continue turning until the Back Plate (15) is snug against the wall.
10. Install glass as per the fixture assembly instructions.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

JUNCTION BOX

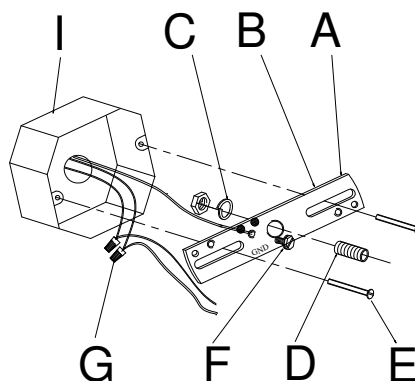


Fig. 2

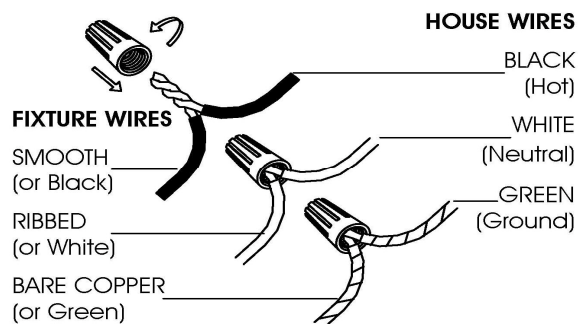


Fig. 3

