

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
below to be filled out by retailer

Mounting Strap



1ea 102"H1.2mm

Deco screw



2ea 10"H9mm

Mounting Screw



8/32"H1" 2ea 5/32"H1" 2ea

Hex nut



2ea 5/32"H3mm

Wire connectors



2ea A3 Orange

Green screw



1ea 8/32"H10mm

Crystal drops
B1 x 6pcs



Crystal drops
C2 x 2pcs



Crystal drops are included in parts bag. (see crystal assembly instruction)

Part Needed _____

Quantity _____

Part Needed _____

Quantity _____

Reason why (missing, scratched, broken glass, bent, bad finish)

Comments _____

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.


1. Secure Glass Shade (G) to the fixture Backplate (E) by threading the Deco Screw (H & I) through holes in Glass Shade (G) and into the Backplate (E) until tight.
2. Install the light bulb in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

8981-BA2 BRI/GRM

Fig 1

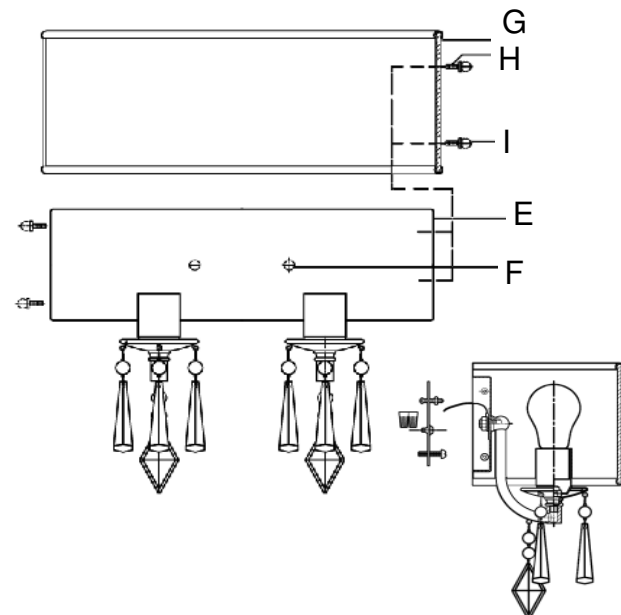


WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. The Mounting Strap (B) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Back Plate (E) and thread the two Fixture Mounting Screws (C) half way into the Fixture Mounting Strap (B).
4. Place the Mounting Strap (B) over the Junction Box so the Fixture Mounting Screws (C) are vertical or horizontal, as required by the fixture type.
5. Attach the Fixture Mounting Strap (B) to the Junction Box using the two mounting screws (A). Tighten the screws (A) securely with screwdriver.

Fig. 1

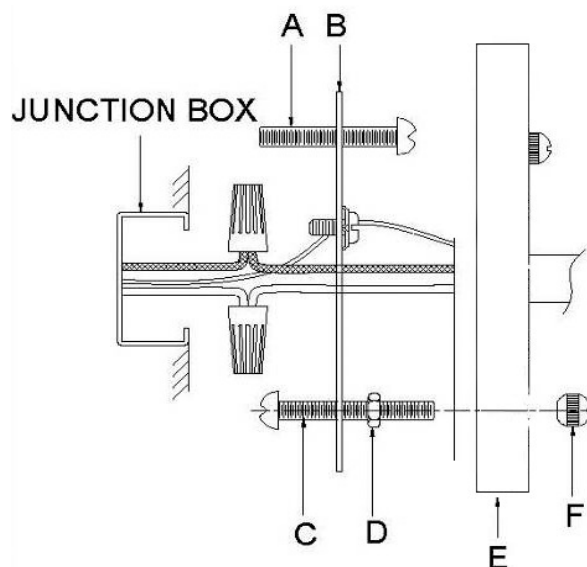

CONNECTING THE WIRES (Fig 2)


6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

8.

Tuck these wire connections neatly into the Junction Box.

Fig. 2

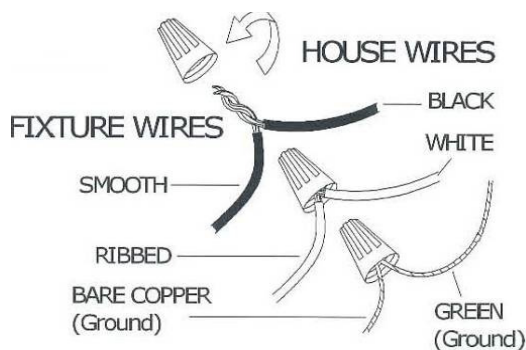


FINISHING THE INSTALLATION (Fig.3)


9. Place the fixture Back Plate (E) over the two Mounting Screws (C) and secure the Back Plate (E) against the wall by threading two Deco nuts (F) over the two Mounting Screws (C) until tight as shown on Fig.1
10. Install glass as per the fixture assembly instructions.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.


Fig. 3

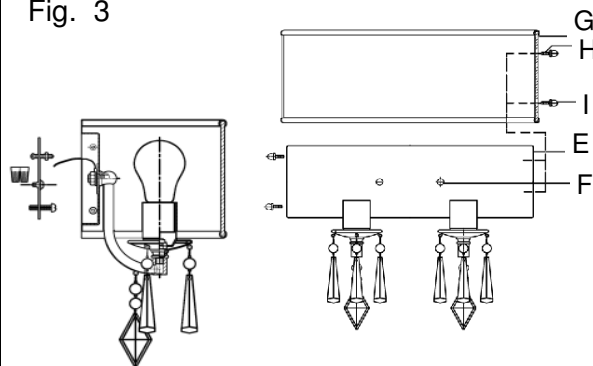


CRYSTAL INSTRUCTION

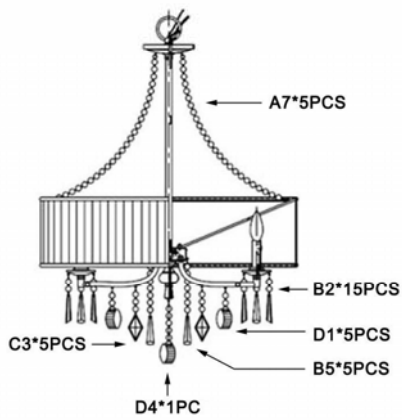


8981/5

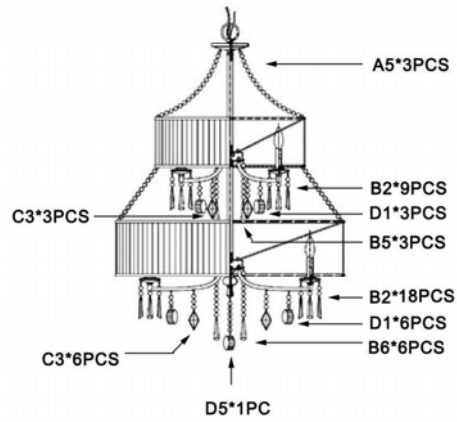


8981/9

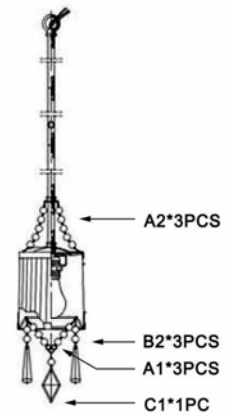


8981/M1L

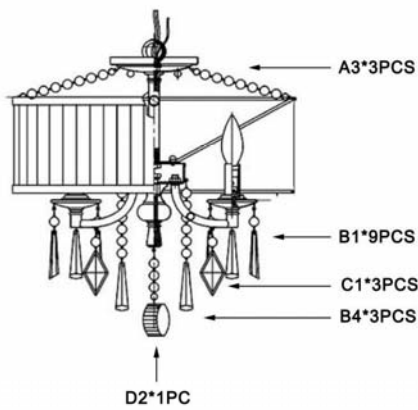


8981/SF

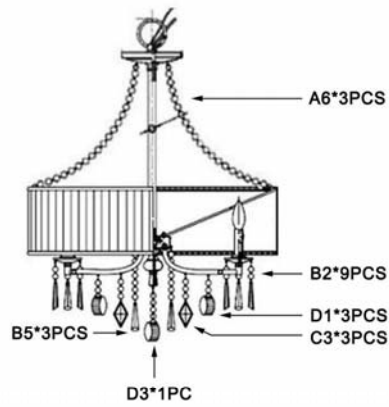


8981/3P

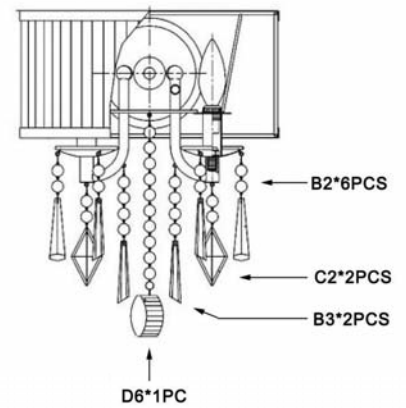


8981/WSC




8981/BA2



8981/BA3

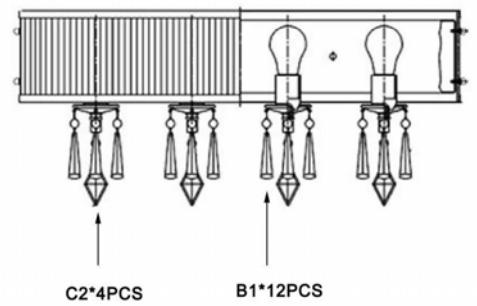

8981/BA4

A-Crystal drop							Crystal number and size	
A1  K508*3pcs	A2  K508*5pcs	A3  K508*7pcs	A4  K508*11pcs	A5  K508*17pcs	A6  K508*19pcs	A7  K508*25pcs	 K508  K521  K525  K526	

B-Crystal drop					
B1  K508*1pc+K521*1pc	B2  K508*2pcs+K521*1pc	B3  K508*4pcs+K521*1pc	B4  K508*6pcs+K521*1pc	B5  K508*7pcs+K521*1pc	B6  K508*9pcs+K521*1pc

C-Crystal drop		
C1  K508*1pc+K525*1pc	C2  K508*2pcs+K525*1pc	C3  K508*3pcs+K525*1pc

D-Crystal drop					
D1  K508*2pcs+K526*1pc	D2  K508*3pcs+K526*1pc	D3  K508*4pcs+K526*1pc	D4  K508*5pcs+K526*1pc	D5  K508*6pcs+K526*1pc	D6  K508*10pcs+K526*1pc