









Fixture Name: Cercado 9018-M1L COB

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
to be filled out by retailer

Mounting Strap 1ea □L104*W24*H11mm 	Mounting screw 2ea 8/32-IP*H1" 	Mounting screw 2ea 5/32-IP*H1-1/2" 
Hex nut 2ea □5/32-IP*H3mm 	Wire connector 2ea A3 Orange 	
Rod 3ea 12" 	Rod 1ea 6" 	Deco Nut 2ea 3/8-IP*H9mm 
Part Needed _____	Quantity _____	
Part Needed _____	Quantity _____	
Reason why _____	(missing, scratched, broken glass, bent, bad finish)	
Comments _____		

FIXTURE ASSEMBLY INSTRUCTIONS


Read and review installation instruction sheet, but do not install before assembling the fixture.

1. By measuring determine correct number of rods needed for proper hanging height. There are 2 optional 12" rods included.
2. To shorten the fixture trim the wires to the desired length plus at least 8~10 inches. You must use at least one Rod (K).
3. Pull the fixture's wire through the Rods.
4. Thread Rod (J) into Frame (K) until tight.
5. Thread Rod (I) into Rod (J) until tight. repeat for any additional rods.
6. Feed the fixture wires through the Canopy (G) and pull the wires until taut.
7. Thread Canopy (G) into Rod (H) until tight.
NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.
8. Place the Glass shade (N) over the Threaded socket (L) and secure both by threading the Socket ring (M) until tight.
9. Install the light bulb in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING!)

9018-M1L COB

Fig 1

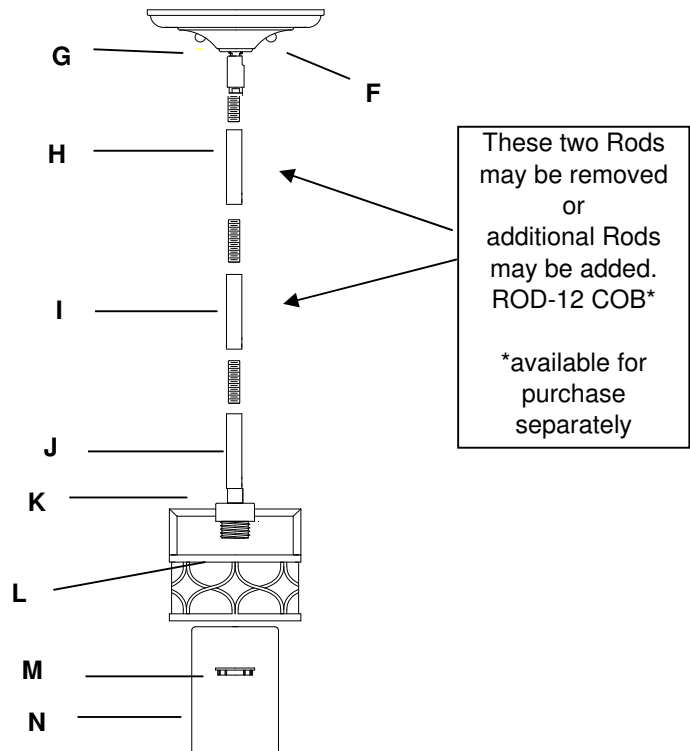

For Customer Service, contact the place of purchase to arrange for replacement parts.

Fixture Name: Cercado 9018-M1L COB


For Mini Pendant Light Fixture

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. The Mounting Strap (B) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Canopy (E) and thread the two Fixture Mounting Screws (C) half way into the Fixture Mounting Strap (B).
4. Place the Mounting Strap (B) over the Junction Box so the Fixture Mounting Screws (C) are vertical or horizontal, as required by the fixture type.
5. Attach the Fixture Mounting Strap (B) to the Junction Box using the two mounting screws (A). Tighten the screws (A) securely with screwdriver.


Fig. 1

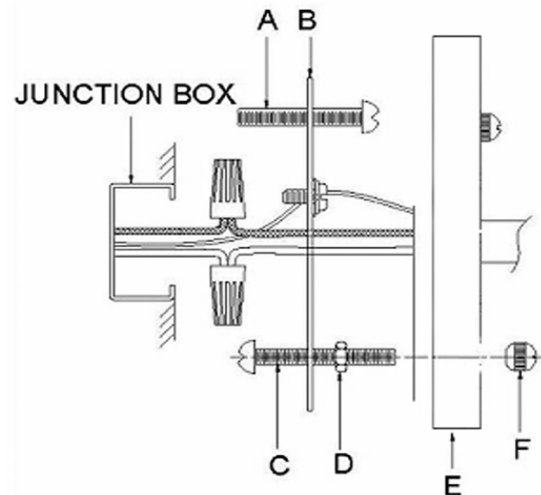

CONNECTING THE WIRES (Fig. 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
 7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
8. Tuck these wire connections neatly into the Junction Box.

Fig. 2

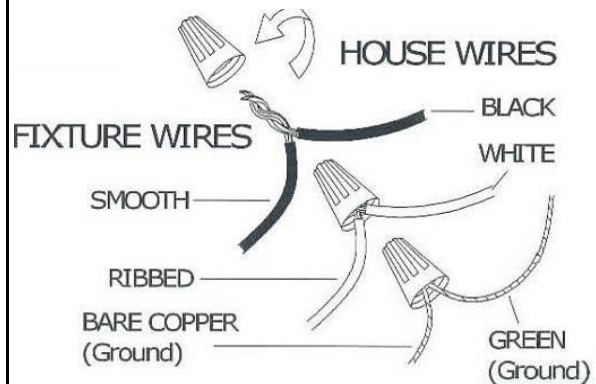

FINISHING THE INSTALLATION (Fig. 3)

9. Place the fixture's canopy over the Mounting bracket (B), adjust the canopy (N) until the Mounting Screws (C) protrude out from the canopy (E) and secure by threading the Decorative nuts (F) on until tight.
 10. Install the light bulbs and glass shade as per the fixture assembly sheet.
- YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 3

