



Family: Quebec | Item No. 1293 IB

▼ start here




Drawing 1 - Strap Detail

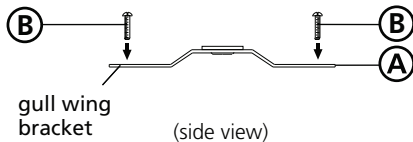

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

Drawing 2 - Fixture Mounting

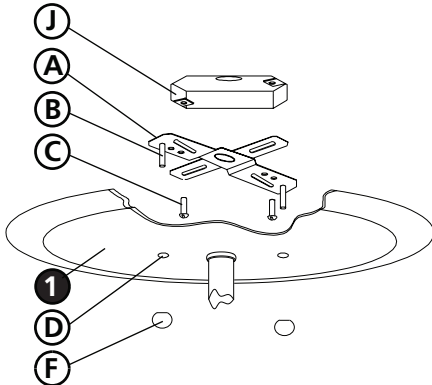


2

1. Thread center (2) into coupler (8), located in the center of the ceiling pan (1) approximately 3/8" - see **Drawing 1**.
2. Tighten hex nut (9) up against coupler (8) to secure center stem (2).

3

1. Prepare gem strap (A) for mounting by threading two screws (B) provided into back of gull wing bracket of gem strap (A) - see **Drawing 1**.
 - Be sure the holes into which the screws are threaded match the spacing of holes (D) in the ceiling pan (1) - see **Drawings 1 and 2**.
2. Mount gem strap (A) to junction box (J), using the two 1" screws (C) provided.

Drawing 3 - Glass Installation

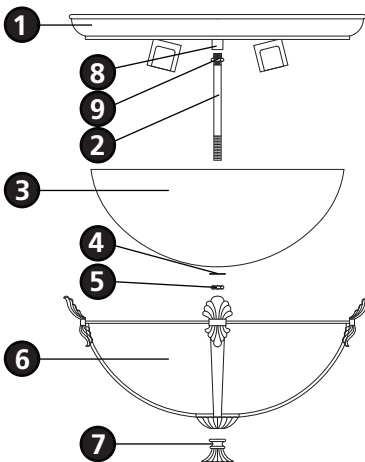

4

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

5

1. Hang the fixture by slipping the holes (D) in the ceiling pan (1) over the screws (B) in the mounting strap (A) - see **Drawing 2**.
2. Thread on ball knobs (F) to secure fixture to the ceiling.

6

1. Before installing glass, fixture can be lamped accordingly.
2. To install glass, slip glass (3) onto fixture and hold in position - see **Drawing 3**.
3. Slip flat washer (4) onto center stem (2) and hold in position.
4. Thread hex nut (5) onto center stem and tighten to secure glass.
Note: Do not overtighten hex nut. Overtightening could cause glass damage.
5. Slip cage (6) onto center stem (2) and over glass (3).
6. Thread on decorative knob (7) to secure cage (6).

Note: Maximum wattage for 1293 fixture is 60 watts per bulb.

2.7.08