



Family: Raley | Item No. 1608 MB



**Drawing 1 - Fixture Assembly**

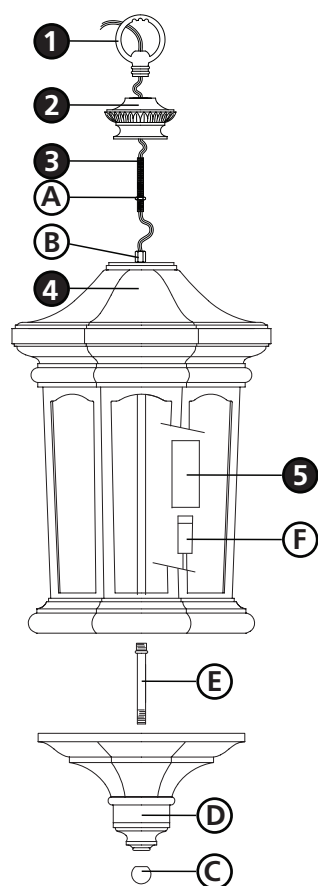

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling part of the main body of fixture, making all necessary electrical connections, hanging the fixture from the ceiling and then assembling the rest of fixture.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. Slip nipple (3) onto wire and thread approximately 3/4" into coupler (B).
2. Thread nut (A) down onto coupler (B) and tighten to lock in place.
3. Slide finial top (2) over wire and onto nipple (3).
4. Slide loop (1) onto wire and thread onto end of nipple (3) and tighten.
5. Please refer to hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

**3**

1. While holding bottom assembly (D) in place, remove bottom knob (C) from cage assembly (4).
2. Slip candle sleeves (5) over sockets (F).
3. Fixture can now be lamped accordingly.
4. To reassemble, follow step 1 in reverse order.

Note: Maximum wattage for 1608 fixture is 40 watts per bulb.

3.17.08