



Drawing 1 - Fixture Assembly

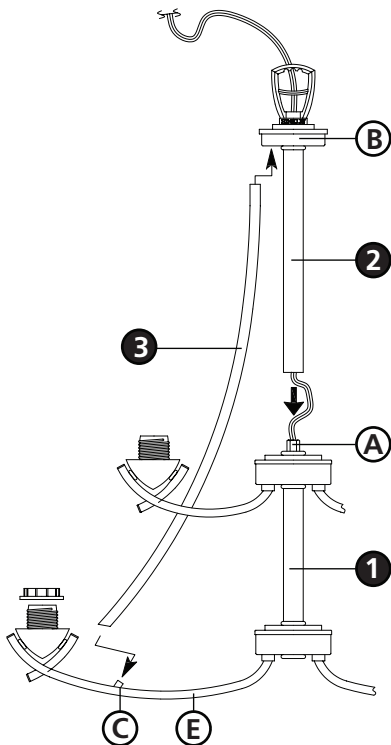

Drawing 2 - Glass Installation

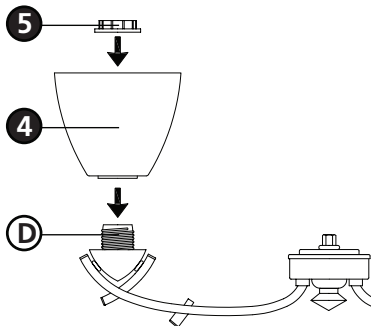

## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

2

1. Thread center column (2) into nipple (A) on top of main body assembly (1), making sure square holes in body (B) align with studs (C) on top of arm (E) - see **Drawing 1**.
2. Slip upright (3) into square hole in body (B) and lift bottom of upright (3) onto stud (C).
3. Please refer to hanging instruction sheet (I.S. 19) provided to continue installation of this fixture. Then refer back to this sheet to install glass.

3

1. Remove socket ring (5) from threaded socket (D) - see **Drawing 2**.
2. Slip glass (4) over threaded socket (D).
3. Thread socket ring (5) onto socket (D).

Note: Maximum wattage for 4128 fixture is 75 watts per bulb.

2.7.08