




Family: Plymouth | Item No. 4257 OB



**Drawing 1 - Fixture Assembly**



**Drawing 2 - Fixture Assembly**

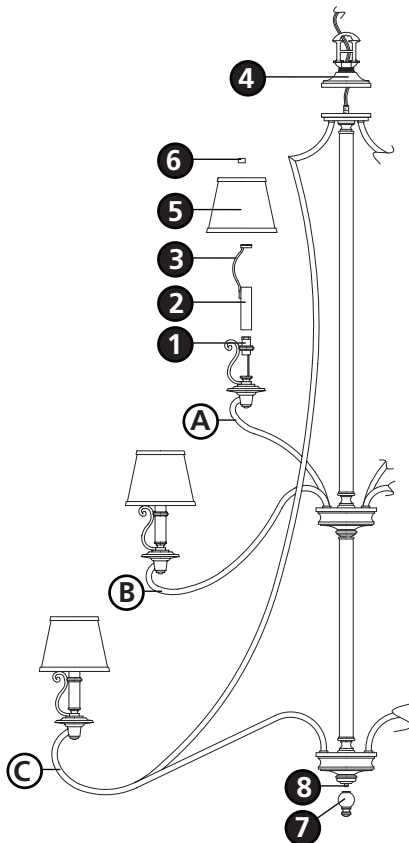

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling and then attaching the fixture shades.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. To assemble fixture, slip top cap (4) with loop, along wire and thread onto top of fixture - see **Drawing 1**.
2. Spread top arms (A) until they are equally spaced 60 degrees apart .
3. Spread middle tier arms (B) until they are equally spaced 120 degrees apart, and equally spaced between bottom arms (A).
4. Spread bottom arms (C) until they are equally spaced 30 degrees apart.
5. Please refer to the hanging instruction sheet (I.S. 19-50) provided to hang fixture. Then refer back to this sheet to attach fixture shades.

**3**

1. To attach shades, slip candle sleeve (2) through ring, and over socket (1). To prevent scratching the candle sleeve when slipping it through the ring, wrap the sleeve in a piece of paper. After candle sleeve is set, the paper can be removed - see **Drawing 2**.
2. Fixture can now be lamped accordingly.
3. Set shade (5), on top of harp (3) and thread in knob (6) to secure.
4. Thread bottom finial (7) onto coupler (8) located at the bottom of the fixture.

Note: Maximum wattage for 4257 fixture is 40 watts per bulb.

11.24.08