



Drawing 1 - Fixture Assembly

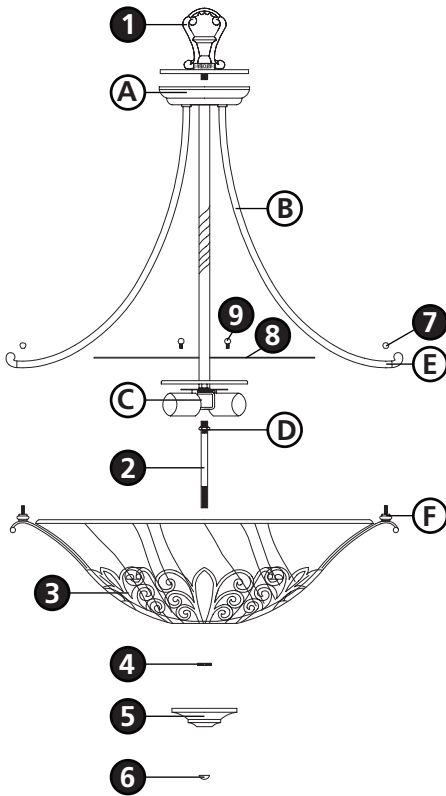

Drawing 2 - Fixture Assembly



▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble fixture, while holding wires tight, slip loop and cap assembly (1) along wire and thread onto top of body (A) - see **Drawing 1**.
2. Spread arms (B) so they are equally spaced 120 degrees apart - see **Drawing 2**.
3. Thread center stem (2) into coupler (C) approximately 3/8".
4. Thread hex nut (D) up against coupler (C) to secure center stem (2).
5. Attach bulb shield (8) (white side down) using the ball knob screw (9) provided.
6. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to install fixture glass.

3

1. Before installing glass fixture should be lamped accordingly.
2. To install glass, slip glass assembly (3) onto center stem (2), making sure to line up studs (F) with holes (E) in uprights (B) and hold in position - see **Drawing 1**.
3. Thread knurl nut (4) onto center stem (2) and tighten.
4. Slip cap (5) onto center stem (2) and hold in position.
5. Thread knob (6) onto end of center (2) and tighten.
6. Thread ball knobs (7) onto end of stud (F).

Note: Maximum wattage for 4354 fixture is 60 watts per bulb.

2.7.08