



design • illuminate • enjoy


#### **Drawing 1 - Fixture Assembly**

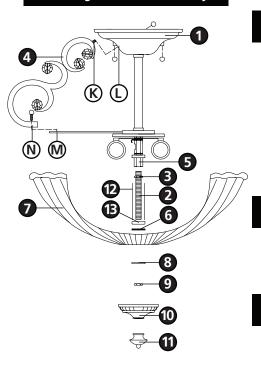

### **Drawing 2 - Strap Detail**



#### **Drawing 3 - Fixture Mounting**



## assembly instructions

Family: Burgesa | Item No. 4362 VR

# Ystart here



- 1. Find a clear area in which you can work.
- 2. Unpack fixture and glass from carton.
- 3. Carefully review instructions prior to assembly.

\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, attaching the mounting strap to the junction box, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.

- 1. To assemble fixture, secure arm (4) to ceiling pan (1) by threading ball screw (K) into threaded hole in pan (L) see **Drawing 1**.
- 2. Secure arm (4) to bracket (M) of lamp assembly by threading ball screw (N) onto bracket (M).
- 3. Repeat steps 1-2 for remaining arm.
- 1. Prepare gem strap (A) for mounting by threading two screws (B) provided into back of gull wing bracket of gem strap (A) see **Drawing 2**.
- Be sure the holes into which the screws are threaded match the spacing of holes (D) in the ceiling pan (1) see **Drawings 2 and 3**.
- 2. Mount gem strap (A) to junction box (J), using the two 1" screws (C) provided.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

- 1. Hang the fixture by slipping the holes (D) in the ceiling pan (1) over the screws (B) in the mounting strap (A) see **Drawing 3**.
- 2. Thread on ball knobs (F) to secure fixture to the ceiling.
- 1. Before installing glass, fixture can now be lamped accordingly.
- 2. To install glass, thread nipple (2) into coupler (5) and secure with hex nut (3) see **Drawing 1.**
- 3. Slip tubing (12) and check ring (13) over nipple (2) and hold in place.
- 4. Slip rubber washer (6) over nipple (2) and hold in place.
- 5. Slip glass shade (7) over nipple (2) and hold in place.
- 6. Slip steel washer (8) over nipple (2) and thread hex nut (9) onto nipple (2) to secure.
- 7. Slip cap (10) and thread finial (11) onto nipple (2).

Note: Maximum wattage for 4362 fixture is 75 watts per bulb.