



Family: Burgesa | Item No. 4369 VR



Drawing 1 - Fixture Assembly

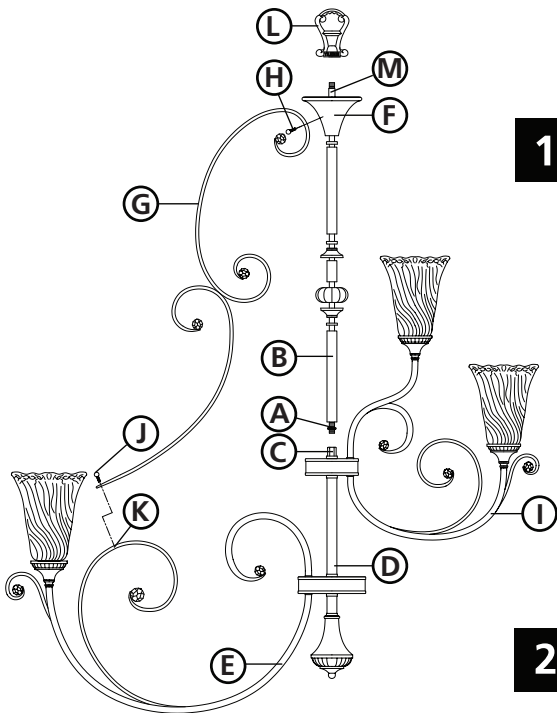

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.


***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble fixture, thread nipple (A) of center assembly (B) into coupling (C) of bottom assembly (D) - see **Drawing 1**.
2. Spread apart bottom tier arms (E) so they are evenly spaced and aligned with threaded holes in cap (F) of center assembly (B).
3. Spread top tier arms (I) so they are evenly spaced 120° apart.
4. Secure arm (G) to cap (F) of center assembly (B), by threading ball screw (H) through arm (G) into the threaded holes in cap (F).
5. Secure arm (G) to bottom tier arm (E), by threading ball screw (J) into hole (K) found on bottom tier arm (E).
6. While holding wires tight, thread loop (L) onto nipple (M) of center assembly (B).
7. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to install fixture glass.

Drawing 2 - Glass Installation

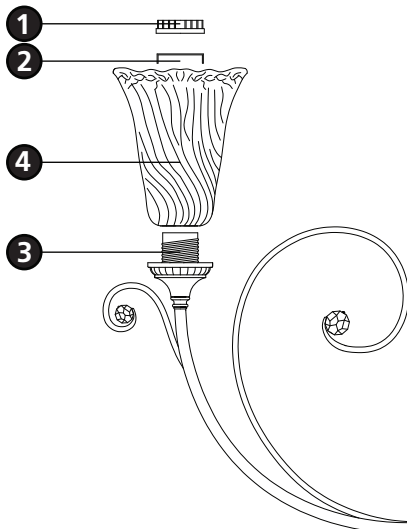

3

1. To install glass, remove threaded socket ring (1) and ring (2) from socket (3) - see **Drawing 2**.
2. Place glass (4) over exposed section of socket (3).
3. Place ring (2) over socket (3) and thread socket ring (1) onto socket (3).
4. Repeat steps 1-3 for remaining glass.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4369 fixture is 40 watts per bulb.

2.7.08