





design • illuminate • enjoy

Drawing 1 - Fixture Assembly

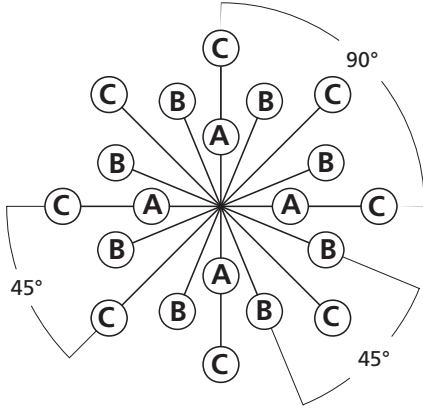

Drawing 2 - Fixture Assembly

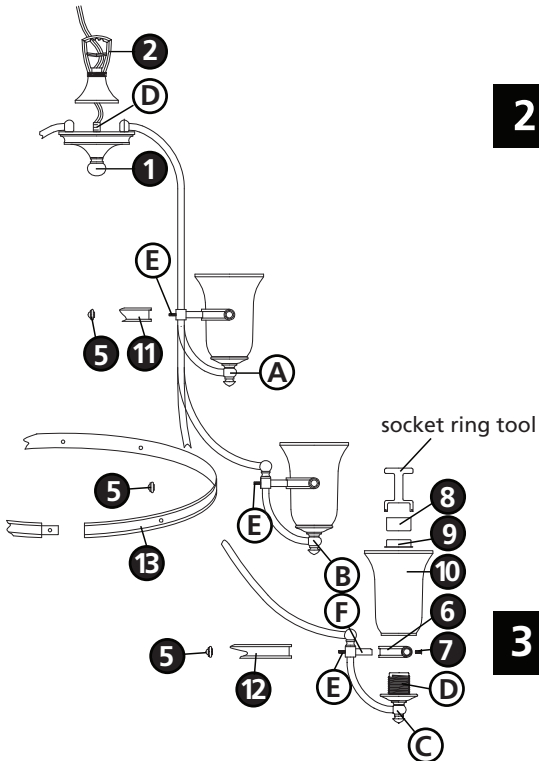


assembly instructions

Family: Britannia | Item No. 4489 AT



▼ start here



4489

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

****** The construction of this fixture will be accomplished by first assembling the main body of the fixture, installing the mounting hardware, hanging the fixture and then installing the glass.***

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble fixture, slip loop **(2)** along wire and thread onto tubing **(D)** located on the top of the main fixture body **(1)** - see **Drawing 2**.
2. Spread top tier arms **(A)** out 90 degrees apart - see **Drawing 1**.
3. Spread middle tier arms **(B)** out 45 degrees apart.
4. Spread top tier arms **(C)** out 45 degrees apart.
5. Slip holes in small ring **(11)** over studs **(E)** - see **Drawing 2**.
6. Thread decorative knob **(5)** onto stud **(E)** and tighten to secure ring **(11)**.
7. Repeat steps 5-6 above for bottom large ring **(12)**.
8. The middle medium size ring **(13)** is a split ring to allow for installation. It must be woven into the center for installation.
9. Repeat steps 5-6 above for middle medium size ring.
10. Attach decorative yoke **(6)** to arm post **(F)** using flat head screws **(7)**.
11. Please refer to the hanging instruction sheet (**I.S. 19-50**) provided to hang fixture. Then refer back to this sheet to install glass.

3

1. To install glass, remove socket ring **(8)** and spacer **(9)** from socket **(D)**.
2. Slip glass **(10)** onto socket **(D)**.
3. Thread socket ring **(8)** and spacer **(9)** onto socket **(D)**.
4. Use socket ring tool to tighten socket ring **(7)**. Notches in socket ring fit into notches on socket ring tool. Tighten socket ring until snug, do not over tighten.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4489 fixture is 40 watts per bulb.

12.01.08