




Family: Carina | Item No. 4675 PL



Drawing 1 - Fixture Assembly

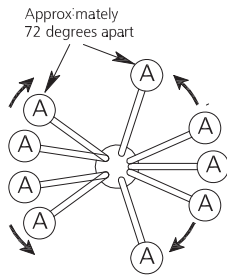

Drawing 2 - Fixture Assembly

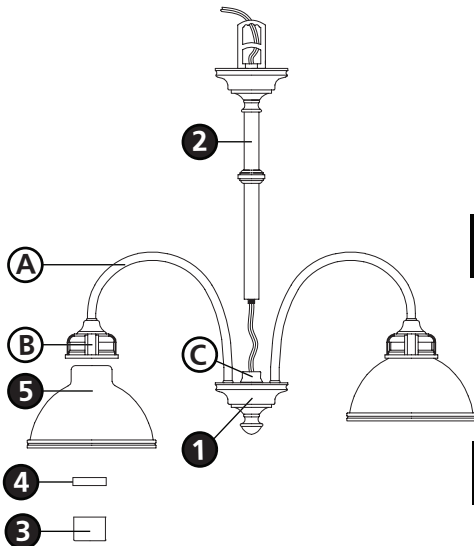

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble main body, slip center column (2) along wire and thread into nipple (C) located at the top of the main body assembly (1) - see **Drawing 2**.
2. Rotate arms (A) until they are approximately 72 degrees apart and are square to the fixtures center line - see **Drawings 1 & 2**.
3. Please refer to hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

3

1. To install glass, remove socket ring (3) and spacer (4) from socket (B) - see **Drawing 2**.
2. Slip glass (5) over socket (B) and hold in position.
3. Slip spacer (4) over socket and hold in position.
4. Thread socket ring (3) onto socket (B) and hand-tighten to secure glass.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4675 fixture is 75 watts per bulb.

2.7.08