



1. Unpack fixture. Take body assembly (1) and unwrap wire.
2. Locate center column (2) [small cap on end]. Slip wire through center tubing of column (2) and thread nipple (A) into coupler (B).
3. Remove screws (4) from top of column (2). Insert support arm of decorative panel (3) [panel measures 30-3/4"] into square hole at top of column (2). Secure with screws (4) removed previously. (see sketch 1 below).
4. Slip wire through center tube of column (5) [large cap on end]. Then thread nipple (C) into coupler (D).
5. Remove screws (7) from top of column (5). Insert support arm of decorative panel (6) [panel measures 18-3/8"] into square hole at top of column (5). Secure with screws (7) previously removed.
6. Slip wire through center tube of loop assembly (8) and thread nipple (E) into coupler (F).
7. Attach glass (9) to fixture using threaded socket ring (10).

Fixture is ready for lamping (75 Watt Maximum).

Mount fixture using in-

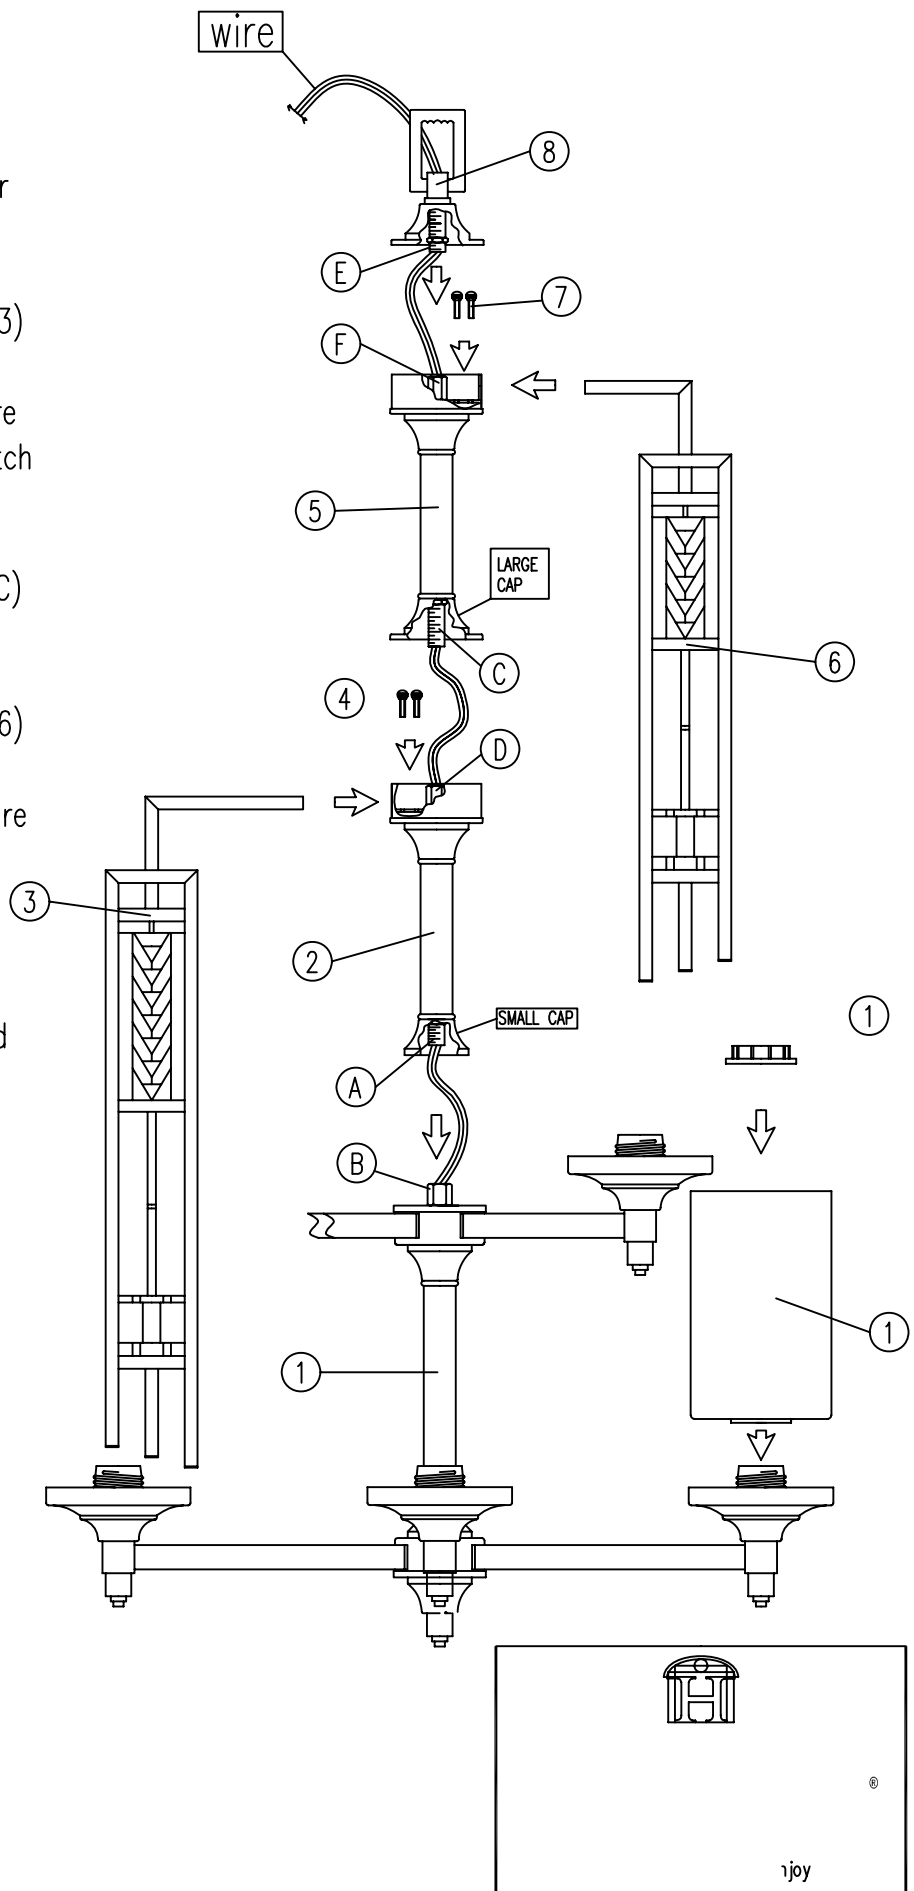

Drawing 1 - Fixture Assembly

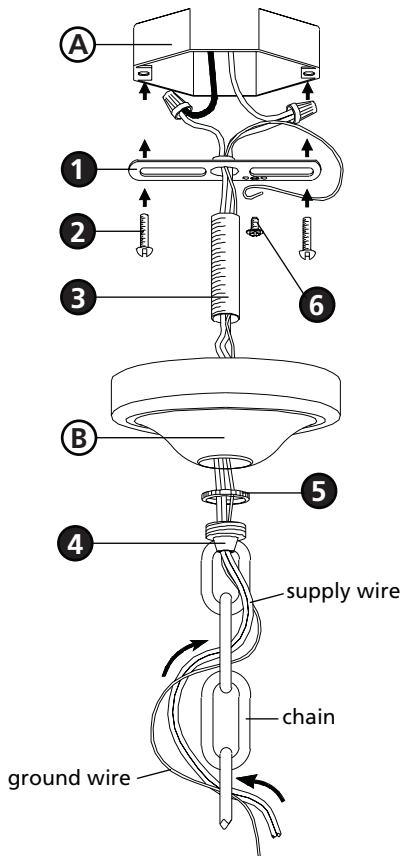

▼ start here

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

1

1. Shut off electrical current before starting. If the fixture you are replacing is turned on and off by a wall switch, simply turn the switch off. If not, remove the appropriate fuse (or open the circuit breakers) until the fixture is dead.

- DO NOT restore current - either by fuse, breaker or switch - until the new fixture is completely wired and in place.

2

1. Fasten mounting strap (1) to outlet box (A) with the original outlet box screws (2) - see **Drawing 1**.

2. Thread nipple (3) into mounting strap (1).

3. Thread loop (4) on to end of nipple (3).

4. Slip canopy (B) over loop (4) and adjust height of loop so half of thread area is exposed.

3

1. Taking the chain, determine the length you require to hang the fixture.

2. Attach one end of the chain to the top loop of the fixture - see **Drawing 2**.

3. Now slip loop collar (5) and canopy (B) onto chain.

4. Attach other end of chain to loop (4). Get assistance for this step since fixture may be heavy and difficult to hold while attaching the chain.

4

1. Unwrap supply wire and ground wire and weave them up through the chain.

2. Slip supply wire and ground wire through center of loop (4).

3. Connect ground wire to mounting strap (1) using green ground screw (6).

4. Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections.

5. Slip canopy up firmly against the ceiling and secure by turning the threaded collar (5) on loop (4) until tight.

Drawing 2 - Loop (4) Detail

Half of thread area of loop (4) is to be exposed. This will allow collar (5) to be threaded on later.

