



Assembly Instructions for 4803 SU

1. Find a clear area in which to unpack and assembly the fixture. The instructions provided should be read through and used to indentify the fixtures components, prior to assembly.

2. To begin assembly, slip center stem (2), along wire and thread it into the top of the main body (1). Now slip loop (3) along wire and thread it onto the top of center stem (2).



3. Take decorative arm (4) and attach it to the main body ring (A) using the cap knob (5) provided. (see detail 1 below). Repeat process for the remaining 2 arms.

4. After the three decorative arms are attached, the 3 swag chains can be attached at point (C) and (D). Now thread bottom center stem (6) into coupler (B) approximately $\frac{1}{4}$ ".

5. The fixture can be mounted at this time. Please follow all instructions provided. Note: maximum wattage for this fixture is 40 watts per bulb.

6. After mounting is complete, Slip glass (7) over bottom center stem (6), and hold in position while you slip the glass cap (8) onto stem (6) and then thread finial (9) onto exposed end of bottom center stem (6). Hand tighten finial (9) only. Over tightening with a tool may cause glass damage.

Fixture is now complete and power to the junction box can be restored.

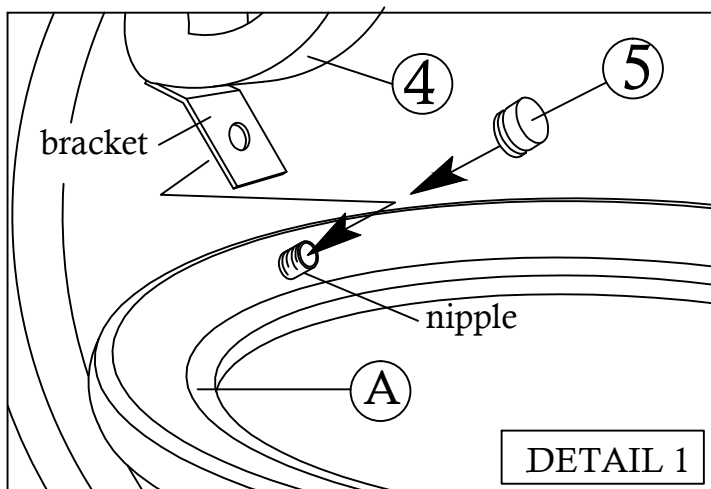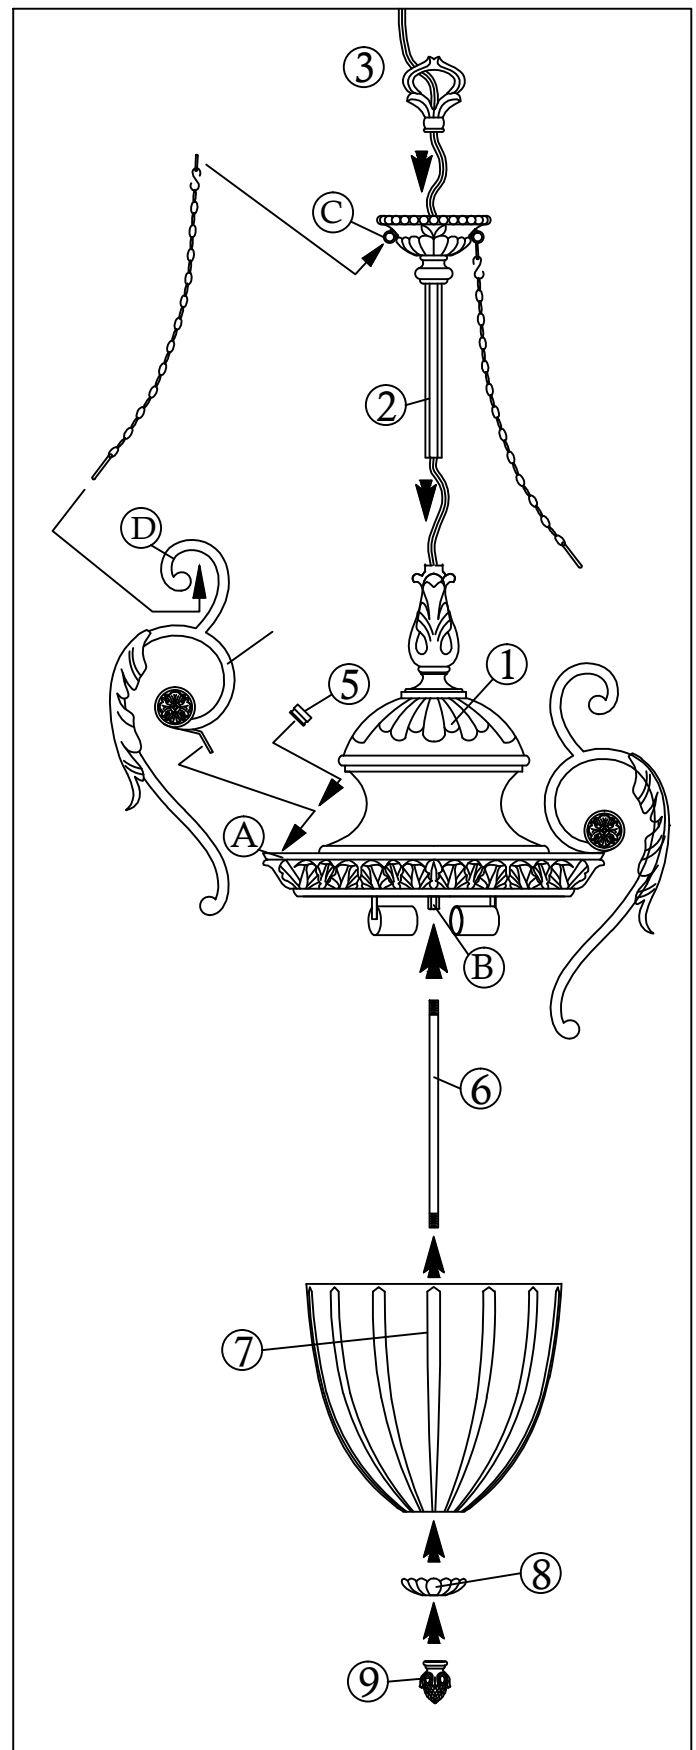

Assembly Instructions for 4803 SU

Mounting instructions

1. Shut current off before starting. If the fixture you are replacing is turned on and off by a wall switch, simply turn the switch off. If not, remove the appropriate fuse (or open the circuit breakers) until the fixture is dead. Do not restore current - either by fuse, breaker or switch - until the new fixture is completely wired and in place.
2. Fasten mounting strap (1) to outlet box (A) with the original outlet box screws (2).
3. Thread nipple (3) in to the mounting strap (1), as illustrated.
4. Thread loop (4) on to end of nipple (3).
5. Slip canopy (B) over loop (4) and adjust height of loop so half of thread area is exposed. (see Drawing 3 below)
6. Taking the chain, determine the length you require, and attach one end of the chain to the fixture. Now slip loop collar (4A) and canopy (B) onto chain.
7. Now attach other end of chain to loop (4). Please get assistance during this step. Since fixture may be heavy and difficult to hold while attaching chain.
8. Unwrap supply wire and ground wire and weave them up through the chain. Then slip supply wire and ground wire through center of loop (4).
9. Connect ground wire to mounting strap (1) using green ground screw (5).
10. Now connect outlet box wires to fixture leads. Important: connect white outlet box wire (6) to ribbed or white fixture lead (6A). Then connect black or red outlet box wire (7) to smooth or black fixture lead (7A).
11. Slip canopy up firmly against the ceiling, and secure by turning the threaded collar (4A) on loop (4) until tight.

Drawing 3

half of thread area of loop (4) is to be exposed. This will allow collar (4A) to be threaded on later.

