



# assembly instructions

4817


Family: Canyon Ridge | Item No. 4817 AD/RI



**Drawing 1 - Fixture Assembly**

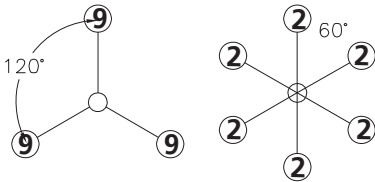

**Drawing 2 - Fixture Assembly**

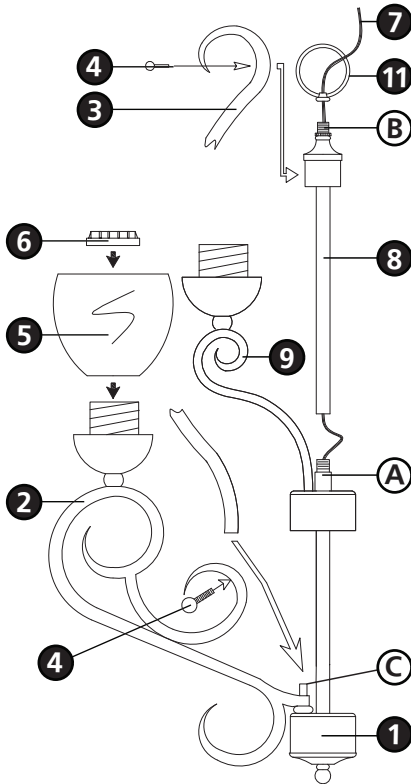

▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, and then hanging the fixture from the ceiling.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. To assemble main body, pull wire (7) tight and thread center column (8) onto nipple (A) and screw loop (11) onto nipple (B) - see **Drawing 2**.
2. Rotate three arms (9) on first tier until they are 120 degrees apart - see **Drawing 1**.
3. Rotate six arms (2) on second tier until they are equally spaced 60 degrees apart.
4. Slip end of scroll (3) over square peg (C) on fixture body (1).
5. Attach scroll (3) to fixture body (1) and the arm (2) using ball knob screws (4).
6. Attach glass (5) with threaded ring (6).
7. Please refer to hanging instruction sheet (I.S. 19) provided to hang fixture. Then fixture can be lamped accordingly.

Note: Maximum wattage for 4817 fixture is 60 watts per bulb.

2.7.08