


Drawing 1 - Fixture Assembly

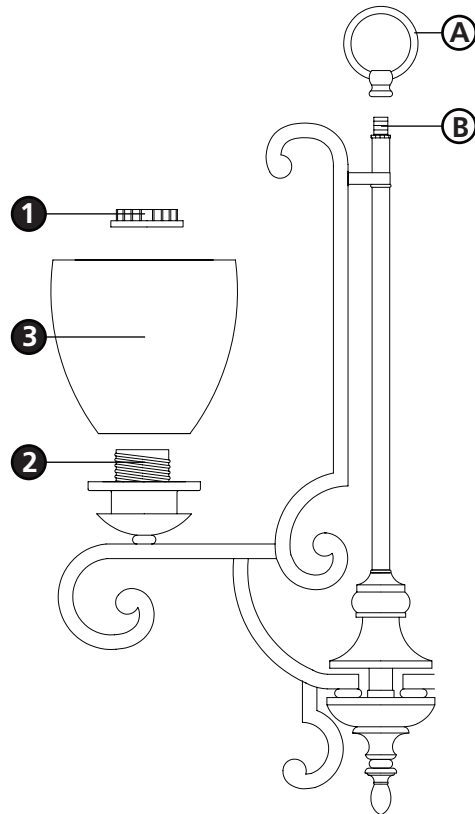

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble fixture, holding the wires tight, thread loop (A) onto nipple (B).
2. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

3

1. To install glass, remove socket ring (1) from socket (2) - see **Drawing 1**.
2. Place glass (3) on socket (2).
3. Thread socket ring (1) onto socket (2).
4. Repeat step 1-3 for remaining glass.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4833 fixture is 60 watts per bulb.

2.7.08