




Drawing 1 - Fixture Assembly

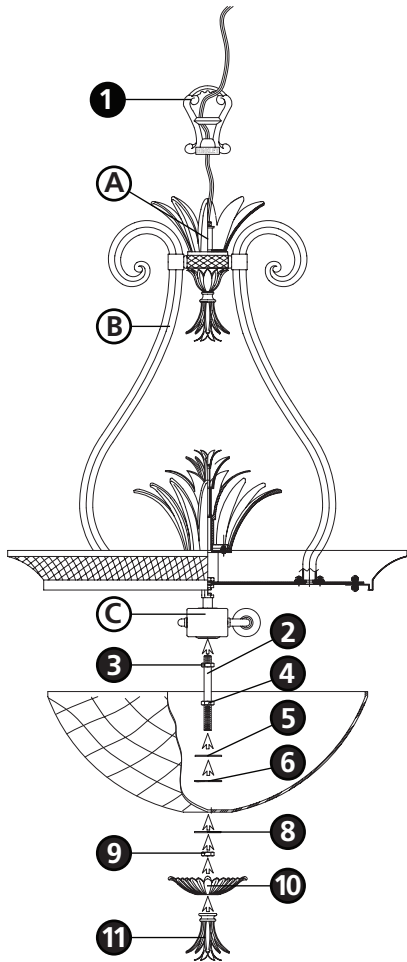

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Slip loop (1) along supply wire and thread it to nipple (A) located at top of the main body assembly (B).
2. Thread the center nipple (2) and into bottom of cluster assembly (C) approximately 1/4".
Note: Threading nipple into cluster assembly too far could cause the wires to be cut.
3. Take nut (3) and tighten it against the bottom of the cluster assembly (C) to lock nipple (2) in place.
4. Please refer to the hanging instruction sheet (I.S. 19) provided to complete installation of this fixture.

3

1. Slip steel washer (5) and then rubber washer (6) onto nipple (2).
2. Slip glass (7) onto nipple and tighten and adjust nut (4) if necessary to have glass fit.
3. While holding glass (7) in place, slip steel washer (8) onto nipple (2) and thread hex nut (9) onto nipple and tighten.
Note: Over tightening nut (4) could cause damage to glass.
4. Slip decorative plate (10) onto nipple (2).
5. While holding against glass (7), thread finial (11) and hand tighten only.

Note: Maximum wattage for 4884 fixture is 75 watts per bulb.

2.7.08