


Family: Veranda | Item No. 4898 SU

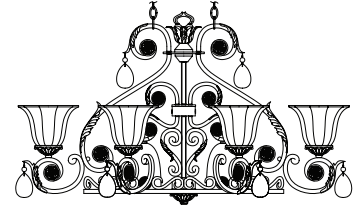

Drawing 1 - Fixture Assembly

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then attaching crystal pentalogues.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble fixture, slip leaf **(A)** and then tube **(B)** over nipple **(C)**.
2. Thread loop **(D)** onto nipple **(C)**.
3. Slip cap **(E)** over nipple **(F)** and hold in place.
4. Thread finial **(G)** onto nipple **(F)**.
5. Please refer to the hanging instruction sheet **(I.S. 19-75)** provided to hang fixture. Then refer back to this sheet to install fixture glass.

3

1. To install glass, remove socket ring **(1)** from socket **(2)**.
2. Slip glass **(3)** on to socket **(2)**.
3. Thread socket ring **(1)** back onto socket **(2)**.
4. Repeat steps 1-3 for remaining glass.
5. To attach crystals, hang crystal drop **(4)** from small ring **(5)** and repeat with remaining crystals.
6. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4898 fixture is 100 watts per bulb.

2.7.08

