



Item No. 52370

▼ start here



Drawing 1 - Fixture Mounting

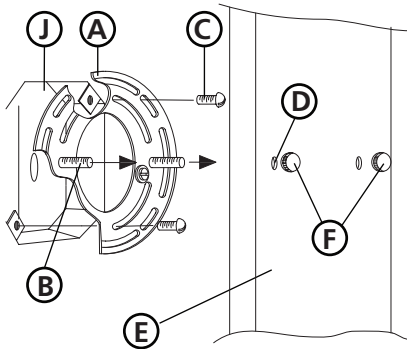

1


1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first mounting the mounting strap to the junction box, making all necessary electrical connections, mounting the fixture to the wall and then installing the glass.**

2

1. Prepare mounting strap (A) by threading the two 1 1/4" long mounting screws (B) into the back of the universal strap - see **Drawing 1**.
 - Be sure the holes into which the screws are threaded match the spacing of holes (D) in the back plate (E).
2. Attach mounting strap (A) to junction box (J) using two 1" screws (C) provided.

Drawing 2 - Fixture Mounting

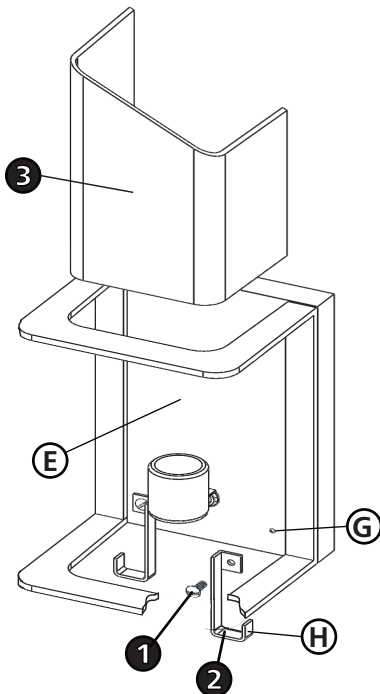

3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

4

1. To mount fixture, slip the two mounting screws (B) through the two mounting holes (D) in the backplate (E) - see **Drawing 1**. NOTE: make sure holes (D) for mounting glass support are at the bottom of the fixture - see **Drawing 2**.
2. While holding fixture in place, thread the two ball knobs (F) on to the end of the mounting screws (B), and tighten.

5

1. To install glass first it is necessary to attach the glass supports (2) to the backplate (E) - see **Drawing 2**.
2. To install glass supports (2) first remove screw (1) from backplate (E).
3. To attach glass supports (2) align holes in support tab with threaded hold (G) in backplate (E) and thread in screw (1) removed earlier.
NOTE: there is a left and right glass support. when installing support, hook (H) and mounting tab of glass support face towards the outside edge of the fixture - see **Drawing 2**.
4. After glass supports are attached slide in glass (3) from the top of the fixture, making sure bottom edge of glass fits into hook (H) of glass support.