

RELYENCE DISTRIBUTOR PROGRAM



RE-GEO-FM-930XX

LED CEILING FIXTURES
LED ROUND DRUM


Type

Project



Catalog No.

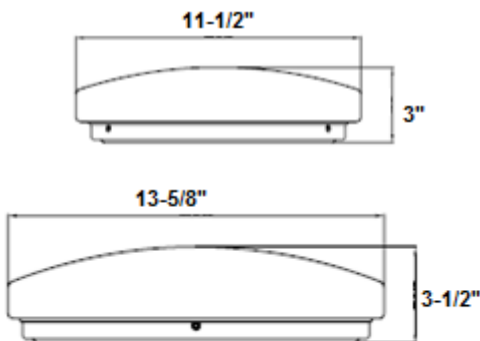

DIMENSIONS: 11-1/2" Ø x 3"H / 13-5/8" Ø x 3-1/2"H



SPECIFICATIONS

| | | |
|-----------------------|---|---------|
| Model | RE-GEO-FM-930XX | |
| Description | LED Round Drum | |
| Input Voltage | 120 VAC | |
| Size | 11" | 14" |
| Wattage | 15W | 25W |
| Lumens | 950lm | 1750lm |
| Efficacy | 63 lm/W | 70 lm/W |
| CCT/CRI | 2700K@90CRI | |
| | 3000K@80CRI | |
| | 3500K@80CRI | |
| Power Factor | >0.9 | |
| Operating Temperature | -20 to +40°C | |
| Dimming | 10 to 100%, Triac and CFL/LED | |
| Dimensions | See Diagram | |
| Environment | Indoor – Dry / Damp | |
| Certifications |   | |
| Warranty | 1 Years – see published warranty terms for detailed information. | |

▼Exceeding the operating temperature values may damage the LEDs by reducing the lifespan, lumen output, and/or adversely impact color consistency. Improper thermal management may lead to premature product failure and void the warranty.

DESCRIPTION

JESCO's RELYENCE Series presents a round, low profile ceiling fixture offering a cost effective solution for general lighting in both residential and light commercial applications. Available in 11" and 14" sizes. The white acrylic diffuser is easily removed for installation in any room. Applications include bedrooms, foyers, hall ways and offices. Both sizes incorporate a highly efficient LED design providing up to 70 lumens per watt which is dimmable down to 10% with most Triac or CFL/LED dimmers. Can be used in dry or damp locations.

FEATURES

- Up to 1750 lm from 25W with integral LED design
- Highly efficient - 70 lm/W
- CCT - 2700K, 3000K or 3500K◆
- CRI >80 & 90◆
- Dimmable down to 10% with most Triac or CFL/LED dimmers
- LED Life - 50,000 hours
- ADA compliant
- Dry or damp location
- Eco-Friendly – No mercury or hazardous materials

◆Refer to ordering info

JESCO
LIGHTING GROUP

www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Specifications subject to change without notice.

1/12/2017
Page 1 of 3

RELYENCE DISTRIBUTOR PROGRAM



RE-GEO-FM-930XX

LED CEILING FIXTURES
LED ROUND DRUM

Type

Project

Catalog No.

ORDERING INFORMATION

MODEL

RE-GEO-FM-930

STYLE

11 – 11-1/2" Round
14 – 13-5/8" Round

CCT/CRI

2790-2700CCT/90CRI
3080-3000CCT/80CRI
3580-3500CCT/80CRI


FINISH

WH-White


Example: **RE-GEO-FM-93011-2790-WH**

PHOTOMETRIC DATA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

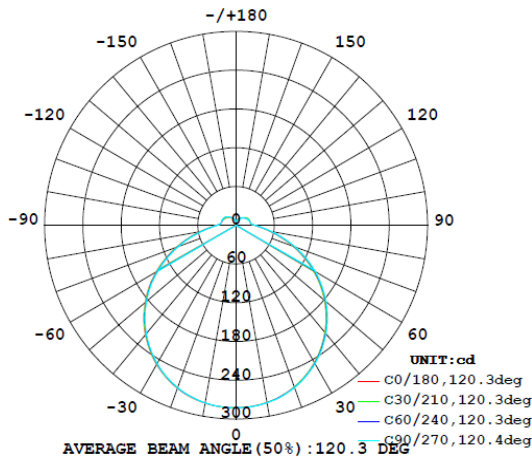

Flux out: 678.3 lm

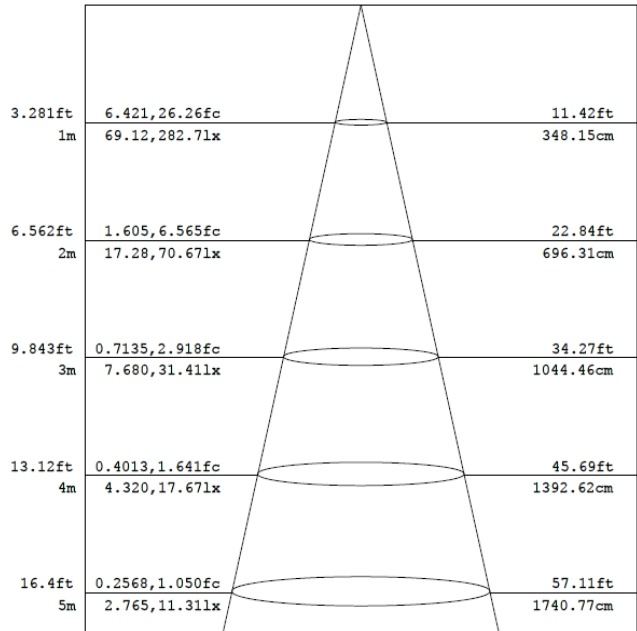

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

For 11"

JESCO
LIGHTING GROUP

www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Specifications subject to change without notice.

1/12/2017
Page 2 of 3

RELYENCE DISTRIBUTOR PROGRAM



RE-GEO-FM-930XX


LED CEILING FIXTURES
LED ROUND DRUM

Type


Project

Catalog No.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

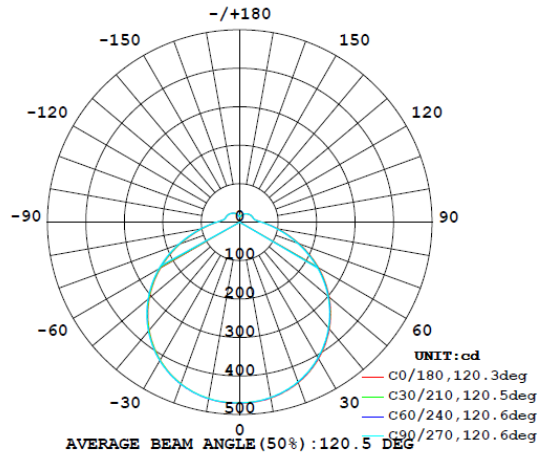

Flux out:1129 lm

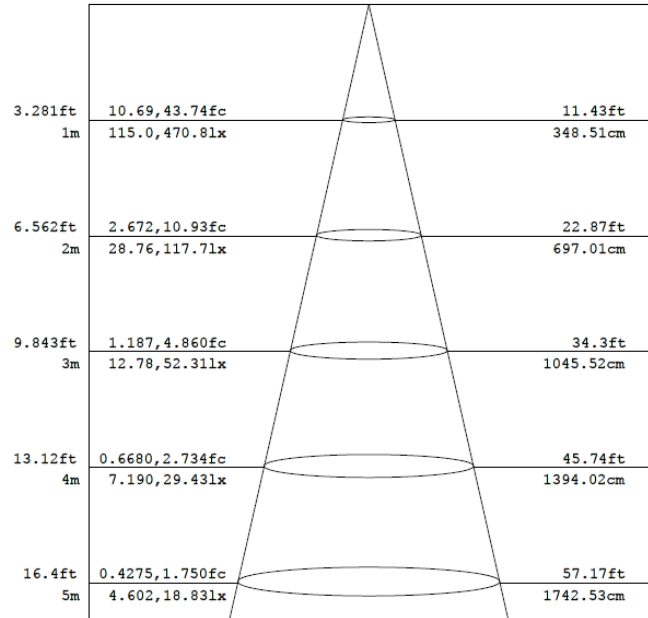

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

For 14"

JESCO
LIGHTING GROUP

www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Specifications subject to change without notice.

1/12/2017
Page 3 of 3