


KICHLER.





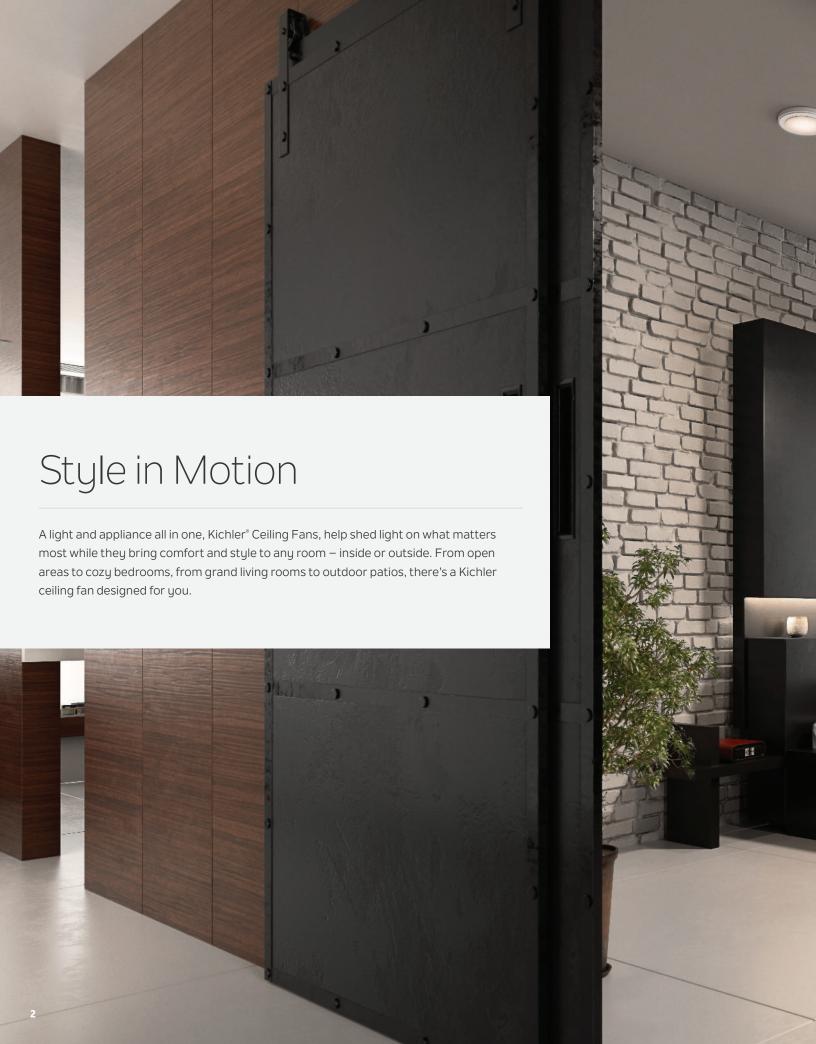

CONNECT WITH US











Facebook.com/Kichler.Lighting Twitter.com/Kichler.Lighting
Twitter.com/KichlerLight
YouTube.com/KichlerLighting
Houzz.com/pro/KichlerLighting/Kichler
Pinterest.com/KichlerStyle
Instagram.com/KichlerLighting

To find an Authorized Dealer, visit Kichler.com.

TABLE OF CONTENTS

BY COLLECTION NAME

CONTENT OVERVIEW

6	DC vs. AC Fans	16	Symbol Guide
7	Why Choose LED	17	Visual Index
8	Rating Guide & Air Circulation	24	Décor Fans
10	Advanced Product Support (APS)	108	Kichler® Fans
12	Indoor Living	260	Accessories
14	Outdoor Living	283	Index

COLLECTIONS BY FAMILY NAME

Ahrendale [™]	152	Incus [™]	110
Arkwet [™]	124	Jace [™]	180
Arvada	134	Jade	78
Ashbyrn	142	Kevlar [™]	190-193
Basics	246-259	Kimberley	194
Bisc™	94	Kosmus	112
Bowen	200-205	Kyte [™]	46
Cameron	130	Lacey [™] II	144
Canfield [™]	206-223	Leeds™	160
Carlson™	162	Lehr™ II	126-129
Chiara	138	Link [™]	106
Colerne [™]	38	Lucian [™]	188
Eads™	154-157	Lyndon	148-151
Ellys	132	Maor	158
Eris	62	Monarch [™]	166-175
Ferron [™]	98	Motu [™]	226
Flyy [™]	82	Phree [™]	66
Geno [™]	182	Pinion	28
Gentry	32-35	Pola™	230-233
Hatteras Bay [™]	184-187	Rana [™]	118
Imari	50	Ridley™ II	146


Ried	42
Seaside [™]	164
Skye [™]	136
Sola	234-239
Spyn	116
Spyra	70
Starkk	240-245
Surrey	176
Sutter Place™	224
Szeplo™ II	86-91
Terna [™]	102
Terra	196-199
Todo [™]	228
Trevor™ II	140
Vassar™	178
Volos	114
Xety [™]	74
Zenith™	54
Zeus	58

Choosing The Right Size Ceiling Fan For Your Room

STEP ONE

Determine the square footage of your room.

Measure the length and the width of the room and then multiply. For example, 12 feet long x 10 feet wide = 120 square feet.



STEP TWO

Have a tall or cathedral ceiling?

Many Kichler® ceiling fans work with 8 or 9 foot ceilings. If your ceiling is higher, you'll need a downrod. The rule of thumb is that fans should have a minimum of 7 feet of clearance between the bottom of the fan blades and the floor in order to circulate the air efficiently.

STEP THREE

Determine the size fan you need:

	ROOM SIZE	ROOM TYPE	BLADE SWEEP
SQ. FT. OR LESS	90 square feet or less	Small bedroom or office Galley kitchen Outdoor applications	15" to 42"
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
90-100	90 to 100 square feet	 Over a kitchen table Large walk-in closet Laundry room Small screened-in porch Outdoor applications 	44" to 48"
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
100-150	100 to 150 square feet	Bedroom Larger kitchen Formal dining room Outdoor applications	50" to 54"
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
150-300	150 to 300 square feet	 Great room Large outdoor patio Master suite Outdoor applications	56" to 70" or multiple fans
	ROOM SIZE	ROOM TYPE	BLADE SWEEP
Over 300	Over 300 square feet	LobbiesRestaurantsLarge open spaces	Over 70" or multiple fans



Five Reasons to Choose a Kichler® DC Motor Fan:

USES UP TO 70% LESS ELECTRICITY than Kichler® AC motor fans.

WHISPER QUIET OPERATION virtually eliminates noise.

EASY INSTALLATION thanks to a light-weight motor.

LIFETIME LIMITED WARRANTY
on all Kichler® fans. Visit Kichler.com/Warranty
for details.

COOLTOUCH™ 6-SPEED REMOTE OR WALL CONTROL comes standard with all of our Kichler® DC motor fans for full-function operation.

Why Choose Kichler LED Ceiling Fans?

REPLACEABLE LIGHT SOURCE

All Kichler® LED light sources, whether an integrated module or lamps, are replaceable, which makes them an easy choice for a long-lasting fixture.

ENERGY EFFICIENCY

LED light sources are up to 90% more efficient than fluorescent or incandescent light sources.

TESTED & APPROVED

Kichler® integrated LED light sources are tested and approved to meet our rigid engineering standards and quality assurance requirements.

ENHANCED LIGHT OUALITY

Kichler® integrated LED light sources produce 1,600+ lumens of light, greater output than two 60W incandescent bulbs or one 100W incandescent bulb. And with a Color Rendering Index (CRI) of 80, Kichler LED light sources help you more accurately see the color and subtleties of the objects being illuminated.

LESS WATTAGE EQUALS LESS WASTE

Most Kichler® integrated LED modules use only 17W versus a 100W incandescent bulb, resulting in significant energy savings.





Ceiling Fan Performance Guide

Here's what the numbers mean to you.

Designing ceiling fans that maximize performance for our customers has always been how we do business. We proudly display a rating system for each fan we offer, so you can compare fans with confidence.

Look for this rating guide listed with every Kichler® fan.

AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High (Excludes Lights) POWER USAGE USAGE EFFICIENCY Cubic Ft. Per Minute Per Watt				
6225 73 86				

Engineered for Optimal AIRFLOW

Airflow is measured in Cubic Feet Per Minute (CFM) – a U.S. Government-mandated standard.

• The higher the airflow number, the more air the fan is circulating.

Designed for Minimum

POWER USAGE

Power usage for your fan motor is measured in watts.

- The lower the watts, the less energy the fan consumes.
- DC motor ceiling fans are the most energy-efficient, using the least amount of wattage.


Built for Enhanced

AIRFLOW EFFICIENCY

Airflow efficiency gives you the total picture: dividing the fan's CFMs by the watts of power it consumes.

 The higher the airflow efficiency number, the more air the fan is moving per watt.

Circulate Air With The Seasons



COUNTER-CLOCKWISE

CLOCKWISE

When it's hot outside, set the fan to rotate counter-clockwise. The blades will push air down – creating a breeze or cooling effect on the people in the room.

In the winter, set the fan to rotate clockwise.

The blades will pull the air up and around, moving the warm air that rises to the ceiling back down to the living space.

By changing the fan direction, you can adjust your thermostat up to +4° F when it's hot and -2° F when it's cold, which can save on energy costs.

Educational Videos

Need help? Watch our Kichler Fan Fast Facts at Kichler.com/FanFastFacts

(

Subscribe to our channel: YouTube.com/KichlerLighting




Blade Pitch

What is blade pitch and why is it so important for a ceiling fan? What affects airflow efficiency? Let Kichler Fan Fast Facts help you make the most of your ceiling fan.




Location

What's the best placement of a ceiling fan? Any do's and don'ts for hanging a ceiling fan? Let Kichler Fan Fast Facts help you make the most of your ceiling fan.




Sloped Ceilings

How do you hang a ceiling fan on a sloped ceiling? How steep is too steep? Is an adapter required to hang your fan? Let Kichler Fan Fast Facts help you make the most of your ceiling fan.



Fans with Lights

Kichler® ceiling fans with lighting energize and add ambiance to any space, both in terms of style and function. So how do you pick the lighting that's right for a space? Let Kichler Fan Fast Facts help.



Outdoor Fans

Which fan is right for an outdoor space? Damp-rated fans work in high-humidity areas that won't have direct contact to rain or the elements. Wet-rated fans can handle rain and water spray, as well as direct exposure to the sun. CLIMATES fans can withstand the harshest outdoor elements.



Bluetooth® Technology

Did you know that with a Kichler Bluetooth® speaker light kit you can turn your ceiling fan into a sound system? Get the details and see the technology in action with Kichler Fan Fast Facts.



Advanced Product Solutions & Layout (APS)

Helping You Get The Job Done.

Our Advanced Product Solutions & Layout (APS) Team is a free service provided to our partners to help with design, layout, and technical challenges.

Need to know which cabinet lights to use in a kitchen? Or how to achieve the best lighting effects for your landscape project? Send our layout team your plan. Want to understand how one of our products will operate in a unique location? Give our Technical Support Team a call.

CERTIFIED EXPERTS

With years of combined technical and design training, our APS team is ready to support your layout design service needs for the interior, exterior, commercial, or residential spaces, as well as technical guidance on our entire product line.



A FREE service, only for Kichler partners.



APS LAYOUT SERVICES

This layout design service is available to all Kichler Lighting partners.

- 1 Email us at layouts@kichler.com with a completed design request form (available at Kichler.com/APS) along with any drawings or pictures related to the job.
- Our team will create a bill of materials (BOM) and email it back to you.
- $\\ 3 \\ \text{Once you confirm the BOM and pricing, we'll} \\ \text{return a completed layout design.}$

APS TECHNICAL SUPPORT

No question is too complex. We're available 8:00 AM to 6:30 PM EST, Monday-Friday.

Call us at 844-KICHLER (844-542-4537) or email us at techsupport@kichler.com.



Visit Kichler.com/APS to get started





Indoor Living

Add a breath of fresh air to any room.

Any size, any finish, any style... Kichler®'s comprehensive offering turns ceiling fans into focal points you'll love looking at in any room – even laundry rooms and master closets. We offer one of the largest collections of modern styles available, and feature some of the most unique textures you'll find including Anvil Iron, Satin Black, Weathered White Walnut, Bamboo, Brushed Nickel, Weathered Zinc, Walnut and many more.

Bring it all together.

Carry the look and the light throughout a room to create an effect you'll love for years.





Get the ambient effect of a recessed fixture with a seamless look.

Ceiling Lights 43848WHLED27



Don't overlook countertop workspaces – under cabinet options add light without a harsh glare.

Under Cabinet Lights 6UCSK08WHT



Add additional lighting over islands and dining tables in a way that expresses your personal style.

Ridgewood Chandelier 44180BKT Cobson Pendants 425850Z



Add small disc lights to create visual interest and highlight shelving.

Accent Discs 4D12V27BZT



Bring airflow to large or small spaces with coordinated ceiling fans.

60" Flyy™ LED Ceiling Fan 310700OZ





Use decorative lighting in unexpected ways to add your own unique look.

Riviera 3 Light Pendants 43952OZ







Outdoor Living

Keep your cool outside.

Kichler® outdoor ceiling fans bring style and airflow to your favorite al fresco entertaining spaces. Each offers premium finishes and hardware designed to withstand the elements for years of worry-free performance. Best of all: these fans can also be used indoors – so you can carry the look inside. Be sure to choose a fan rated for your particular space. Kichler offers a range of Wet, Damp and CLIMATES™ selections to pick from.

Bring it all together.

Bring life to your outdoor spaces after dark with the right lighting pieces.



Arrange pendant fixtures in clusters – for a stylish statement and ambient light.

Argyle Outdoor Pendants 49747WZC



 $... or \ large \ fixtures \ to \ match \ your \ space.$

LED Hardscape Lighting 6 LED 15746AZT27



Outdoor ceiling fans bring light, as well as added temperature control, to sitting areas.

Rana[™] LED Fan 60" 310155NI



A built-in Bluetooth® speaker allows you to wirelessly add music to your gatherings.

Lyndon™ **LED Portable Lantern** 49500BKTLED



The right hardscape lighting helps guide your guests at night. Choose small...

LED Hardscape Lighting 1 LED 15744AZT27

Symbol Guide



DC MOTOR CEILING FANS

The ultimate in energy-efficient operation

- Use up to 70% less electricity than AC motor fans
- · Have whisper-quiet operation
- · Cool and efficient operation extends motor life



ENERGY STAR® CEILING FANS

The trusted, government-backed symbol for energy-efficient products

- Meet strict guidelines set by the U.S. Environmental Protection Agency (EPA)
- Are 40% more efficient than conventional fan/light units
- Come with highly efficient light source options

LED LIGHT KIT CEILING FANS

Feature a long life, light source that is extremely energy efficient

- All Kichler® LED light sources are replaceable, whether an integrated LED module or lamps
- Use up to 90% less energy than incandescent light sources and are a low-maintenance alternative
- Last up to 20 times longer than incandescent light sources
- Generate less heat than incandescent light sources



DAMP-RATED CEILING FANS

Engineered for high-humidity areas

- For enclosed porches, sunrooms, bathrooms and more
- · Have water-resistant, durable finishes
- Incorporate galvanized undercoating on all metal surfaces
- Include stainless-steel mounting hardware
- Feature all-weather ABS plastic or sealed wood blades



WET-RATED CEILING FANS

For open or direct exposure to sun, rain or water spray


- · Are ideal for pergolas, lanais, open porches and more
- Have highly durable finishes against rain and snow
- Feature stainless-steel mounting hardware
- Include all-weather ABS plastic blades

DRY LOCATIOINS

DRY-RATED CEILING FANS

• Rated for indoor use only and are <u>NOT</u> intended for damp or wet locations

16

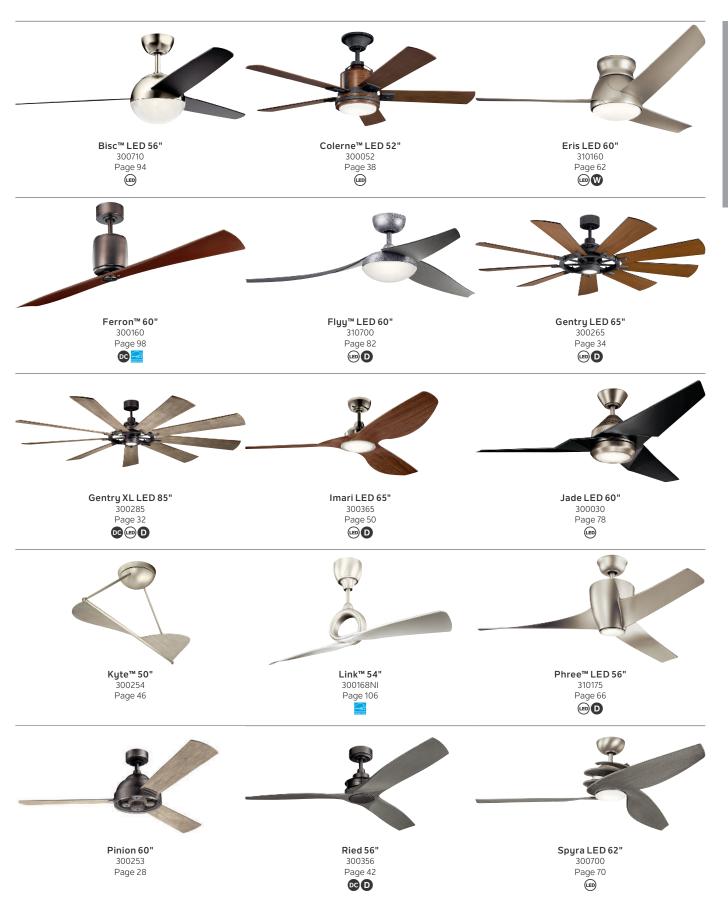

Décor Fans

300060 Page 58






Kichler® Fans





Kichler® Fans



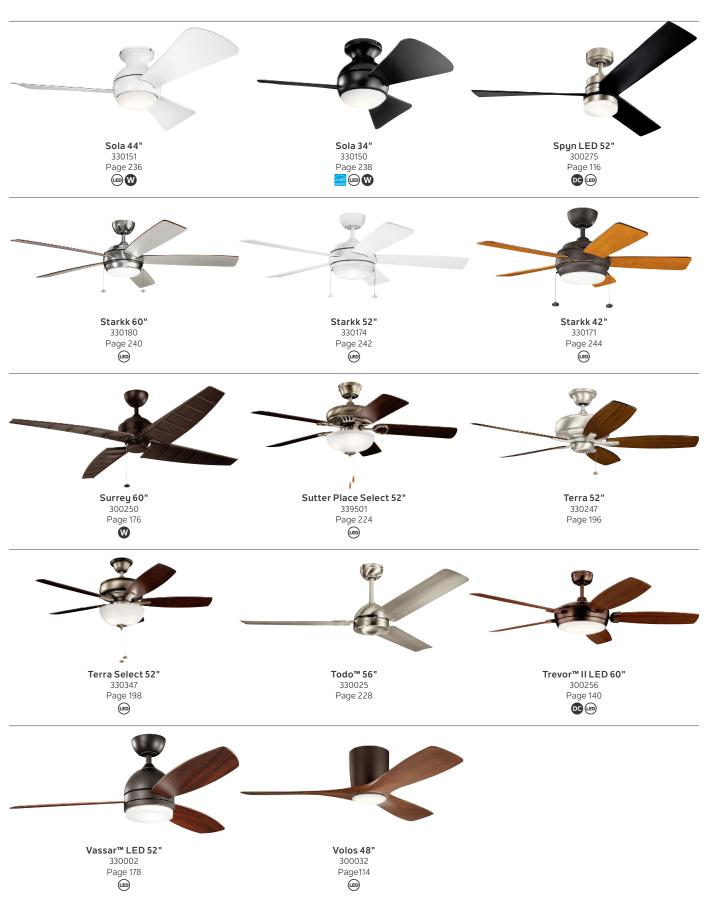







Décor™Fans


Styles That Inspire.

Our décor ceiling fan collection blends our most advanced engineering with a trend-forward approach to design. Delivering emerging ceiling fan styles, new-to-market finishes, and integrated LED lighting that enhances the atmosphere of any space.







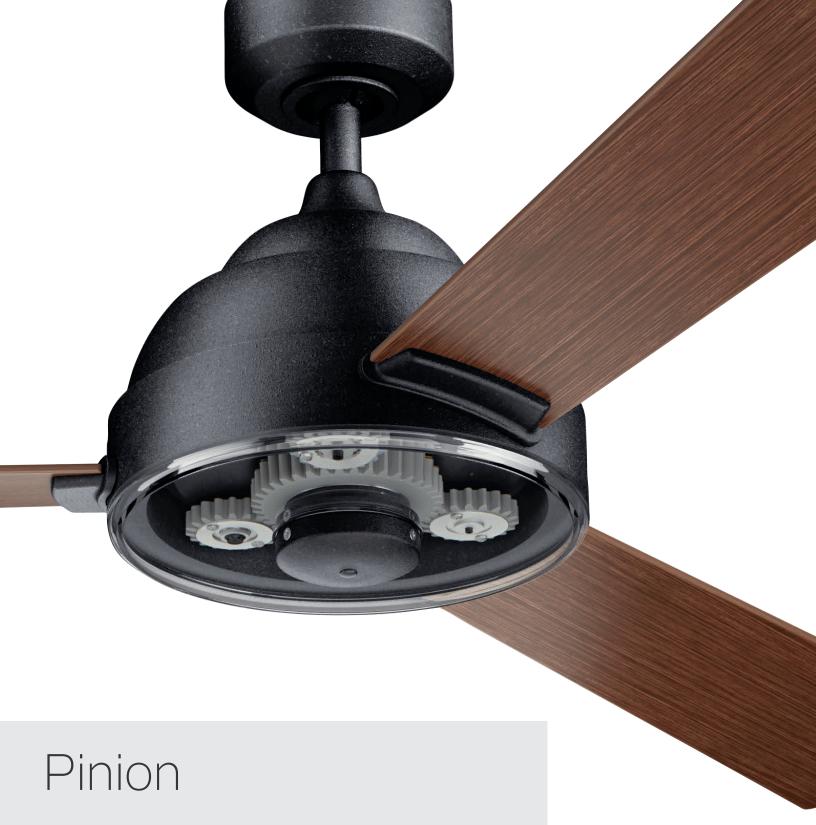

Inspired by the beauty and elegance of clock gears, the Pinion collection brings a unique focal point to any room. Its combination of charm and classic look combined with industrial touches will have guests talking as they watch the gears gracefully turn. The Pinion is perfect for medium to large indoor spaces.



27





INCLUDED FEATURES

Blades (3) Included

- 16° Pitch
- 60" Sweep
- Non-reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass Clear Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 3-Speed Wall Control – Full Function

FAN FEATURES

Mounting Slope - Pitch 22° or 4/12

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 24 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.61 on High RPM 153 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL – FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER – FULL FUNCTION 337009 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish










HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 15.60"	B: 12.30"	C: 11.80"	D: 5.87"		



AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
6203	73	85		




Gentry LED

Massive in scale and size, Gentry knows how to make an impact – both visually and with impressive airflow. The nine-blade design creates a stunning visual effect on or off. Your choice of industrial era-inspired finish combinations provide styles that fit with modern, classic or rustic settings. The LED light source provides 1,600 lumens of output – about the equivalent of a 150-watt incandescent light bulb – for terrific ambient light.





85" Gentry XL LED

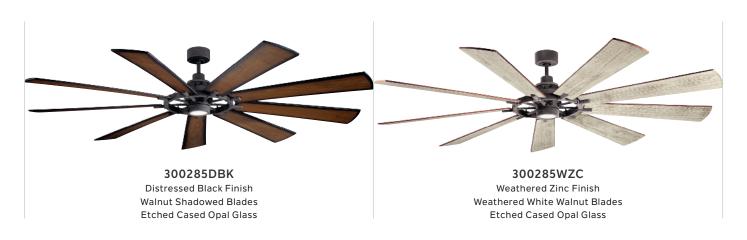



INCLUDED FEATURES

Blades (9) Included

- 14° Pitch
- 85" Sweep
- Reversible
- Wood Veneer

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Damp

Hanging Weight 37.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165NL

Amps 0.47 on High

RPM 76 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER – FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.



Chalkboard Sconce 44015WZC



Cahoon™ Sconce 43777AVI

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


























HANGING MEASUREMENTS

WITH 6" DOWNROD

WITH 6 DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.50"	B: 14.00"	C: 7.00"	D: 6.00"	




AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Watts on High Cubic Ft. Per Minute on High (Excludes Per Watt Lights) 9294 31 300








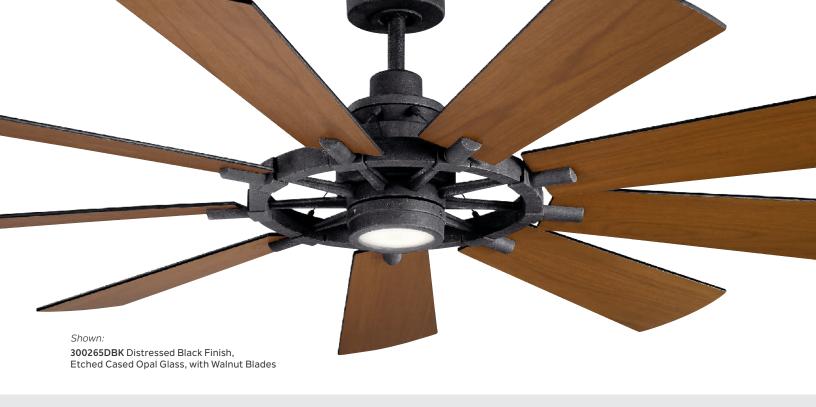

65" Gentry LED

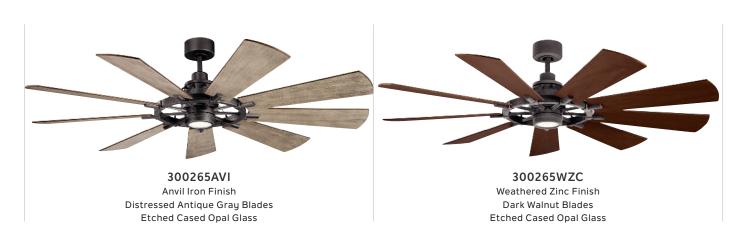



INCLUDED FEATURES

Blades (9) Included

- 14° Pitch
- 65" Sweep
- Reversible
- Wood Veneer

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Damp

Hanging Weight 33 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165NL

Amps 0.45 on High

RPM 122 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER – FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see the complete Fulton Cross™ Collection visit Kichler.com.





Ceiling Light 44224BK




Pendant 44223BK

HANGING MEASUREMENTS

WITH 6" DOWNROD

WITH 6 DOWNROD					
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)		
A: 16.50"	B: 14.00"	C: 7.00"	D: 6.00"		



AIR PERFORMANCE AIRFLOW POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Watts on High Cubic Ft. on High Per Minute (Excludes Per Watt Lights) 8061 34 237







BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish



























Colerne™ LED

You'll love the vintage industrial feel that Colerne brings to a space. Wood-tone blades create the look of rustic wood, while metal accents deliver a style that's at home in farmhouse or modern settings. Integrated LED downlighting allows you to fill a space with just the right amount of light.





52" Colerne LED



Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control - Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 24.7 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 15mm, AC

Amps 0.59 on High

RPM 183 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL – FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER – FULL FUNCTION 370006 (Shown)

COORDINATING LIGHTING


To see the complete Colerne™ Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 6" DOWNROD

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 17.00"	B: 12.50"	C: 9.50"	D: 7.25"



AIR PERFORMANCE **AIRFLOW POWER** AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5205 70 75



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish












Ried

Get a wood-blade look in a style that works in damp spaces, like an enclosed patio or sunroom. Ried combines unique wood tones with rustic-inspired finishes for a fan that delivers on the emerging modern industrial trend.





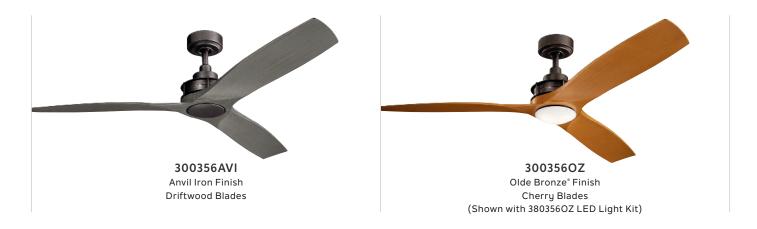

Fan Finish

AVI

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 56" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System -Limited Function

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12

Lead Wire 78"

cETL Listed Damp

Hanging Weight 17.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 12mm, AC

Amps 0.51 on High

RPM 156 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

- 3 Forwards Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 370005 (Shown)

OPTIONAL LED DOWNLIGHT



Ried LED Light Kit 380356 AVI, NI (shown), OZ Etched Cased Opal Glass, 17W Integrated LED Platform, 1,600 lm, 80 CRI, 3,000K 6.50" Dia. x 2.75" H

COORDINATED LIGHTING

To see the complete Crosby Collection visit Kichler.com.




В

HANGING MEASUREMENTS

WITH 6" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 14.25"	B: 13.50"	C: 8.00"	D: 6.00"







BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)



Kyte™

Highly decorative, Kyte brings a whisper-quiet movement of air to rooms in a big way. The ceiling-mounted motor design allows the sleek blades to stand apart, simulating the look of wind turbines for a clean and natural aesthetic.







Rods included to achieve both 24" and 36" fixture drop

Blades (2) Included

- 16° Pitch
- 50" Sweep
- Non-reversible
- ABS

Downrods N/A

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Fan Slide Control

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only

Lead Wire 8"

cETL Listed Indoor

Hanging Weight 28 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 20mm, AC

Amps 0.23 on High

RPM 84 on High

Energy Star® No

INCLUDED CONTROLS



FAN SLIDE CONTROL

- 4-Speed Fan Control
- Faceplate Included
- Controls One Fan
- For Use with Most Ceiling Fans

OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM – LIMITED FUNCTION 371042 (Shown) 371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Weathered White Walnut FB300254












HANGING MEASUREMENTS

WITH 24" FIXTURE DROP

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 24.00"	B: 20.50"	C: 12.25"	D: 12.20"



WITH 36" FIXTURE DROP

Fixture Drop	Blade Drop	Housing (width)	Ceiling Canopy
(from ceiling)	(from ceiling)		(width)
A: 36.00"	B: 32.50"	C: 12.25"	D: 12.20"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
974	27	36	

EXCELLENT QUALITY, SLEEK AND BEAUTIFUL!



This has to be one of the most beautiful fans I have ever seen! Installation was simple, once we figured out how to get to our 18 ft ceiling. Instructions are very detailed, which I appreciate. Controls are fairly simple once you read through the booklet. Great power and creates a good breeze to cool our home. Over all wonderful quality, and just stunning!

- Ar38special | West Virginia



Imari LED

With a 65-inch blade span, Imari offers airflow to fit the occasion. The propeller-inspired single-mold three-blade design creates a clean, sophisticated look. The LED light source provides 2,300 lumens of output – about the equivalent of two 150-watt incandescent light bulbs – for a substantial amount of room-filling ambient light.







Blades (3) Included

- 14° Pitch
- 65" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 23W Dimmable Lamp

Downlight Glass White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Damp

Hanging Weight 26.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-188

Amps 0.44 on High

RPM 126 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 371075 (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.




Pendant 43520DAG



HANGING MEASUREMENTS

	WITH 6"	DOWNROD
ron	Plade Dren	Housin

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.50"	B: 11.75"	C: 10.00"	D: 6.25"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 9548 34 282







BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) MWH Matte White PΝ Polished Walnut FB300365 Nickel PN **SBK** Satin



Zenith[™] LED

A sweeping look that flows from one blade to another, Zenith brings a Zen-like feel to large living areas. The unique blade design appears to wrap around the fan body, blending the arms and blades into one cohesive piece of functioning art.





$60^{"}$ Zenith LED



Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter – Limited Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 33 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.61 on High

RPM 134 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER – LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER – LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see more from these collections visit Kichler.com.




Branches Sconce 44091BK

HANGING MEASUREMENTS

WITH 4.50" DOWNROD

WITH 4.50" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 10.25"	C: 11.60"	D: 6.40"



AIR PERFORMANCE **AIRFLOW POWER** AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 6225 73 86



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish












Zeus LED

Contrasting polished and matte finishes combine for a powerful visual effect that adds a wow-factor to any large space. The sleek look features blades that are held in place in tandem. Known as "blade irons," this functional – yet unique – metal construction gives the fan a style that works beautifully in contemporary spaces.





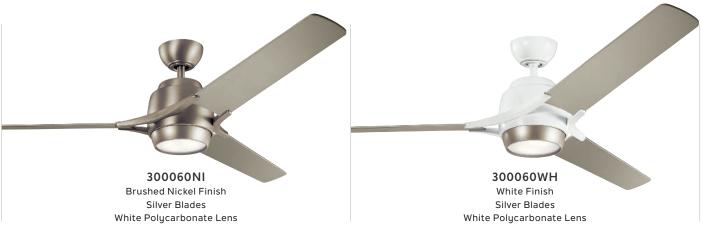

Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System – Full Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 22.1 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC

Amps 0.66 on High

RPM 170 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL SYSTEM – FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER – FULL FUNCTION 370006 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish















HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 11.25"	C: 8.75"	D: 6.00"










Eris LED

Designed to nestle cleanly against the ceiling while still delivering a generous amount of airflow, Eris marries performance with style. Use inside or out – the sleek design, wet rating and 2,300-lumen light output bring room-filling light to a variety of gathering spaces, including open-air patios or decks.





60" Eris LED

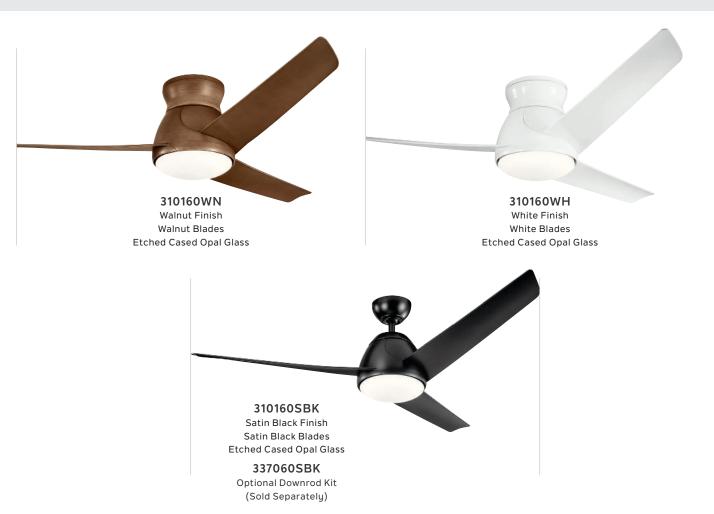

Blades (3) Included

- 25° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods Flush Mount Only

Downlight Replaceable, Integrated (1) 23W Dimmable, 2300 Lumens LED Platform, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Low Ceiling Adaptable

Control 65K Wall Control System – Full Function

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only

Lead Wire 78"

cUL Listed Wet

Hanging Weight 24.9 lbs.

Body Material ABS

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.53 on High

RPM 113 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL SYSTEM – FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER – FULL FUNCTION 370006 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.









OPTIONAL HANGER SYSTEM




Downrod Kit 337060 NI, SBK, WH (shown), WH

HANGING MEASUREMENTS

FLUSH MOUNT

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 11.50"	B: 9.00"	C: 10.00"	D: 8.00"



OPTIONAL HANGER SYSTEM

01 11011/12 11/11/02 (
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.50"	B: 11.00"	C: 10.00"	D: 8.00"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3600	64	56	

AIR PERFORMANCE (OPT.)				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes	AIRFLOW EFFICIENCY Cubic Ft. Per Minute		
5045	Lights) 65	Per Watt 78		

BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) NI Nickel Nickel FB310160 NI SBK Satin Satin Black FB310160 SBK WH White White FB310160 WH WN Walnut FB310160 WN Walnut




Phree[™] LED

Sleek, stylish and solid with a triangular body and precision blades molded into one piece, creating a seamless contemporary design. The center light provides a focal point versus adding whole-room ambient light.





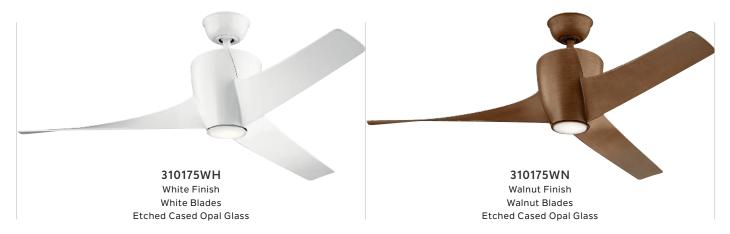

Blades (3) Included

- 22° Pitch
- 56" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System – Full Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Damp

Hanging Weight 28.5 lbs.

Body Material ABS

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.73 on High

RPM 142 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL SYSTEM – FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER – FULL FUNCTION 370006 (Shown)

COORDINATING LIGHTING

To see the complete Moderne Collection visit Kichler.com.




Oval Chandelier/Pendant 42993SNLED

HANGING MEASUREMENTS

WITH 4.50" DOWNROD lade Drop Housing Ceiling

Fixture Drop	Blade Drop	Housing (width)	Ceiling Canopy
(from ceiling)	(from ceiling)		(width)
A: 16.00"	B: 15.50"	C: 9.50"	D: 6.75"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 6467 87 75



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish















Spyra LED

Inspired by a stirring whirlwind, Spyra's contoured edges on blades and body reflect the light beautifully. Once in motion, the fan generates a powerful breeze, appearing to gather speed from top to bottom.









Blades (3) Included

- 20° Pitch
- 62" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 23.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe DC-165M

Amps 0.5 on High

RPM 116 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER – FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see the complete Roswell $^{\text{\tiny{M}}}$ Collection visit Kichler.com.



Wall Sconce 43305NI



Chandelier/Pendant 43301NI

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


















HANGING MEASUREMENTS

WITH 4.50" DOWNROD

=				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.25"	B: 14.25"	C: 12.75"	D: 6.75"	



AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
6467	36	181			







Xety™ LED

Xety does more with less: the two innovative blades deliver air movement while the LED light brings brilliant illumination to a space. Authentic industrial hardware enhances the visual interest.





 ${\bf 300702NI}$ Brushed Nickel Finish, White Polycarbonate Lens, with Champagne Blades

56" Xety™LED



Blades (2) Included

- 16° Pitch
- 56" Sweep
- Non-reversible
- Polycarbonate

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 3 Speed Wall Control Full Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 20.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.71 on High RPM 191 on High Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER – FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER – FULL FUNCTION 337009 (Shown)

COORDINATING LIGHTING


To see the complete Erzo™ Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.75"	B: 11.00"	C: 5.50"	D: 5.75"



AIR PERFORMANCE AIRFLOW POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High Per Minute on High (Excludes Per Watt Lights) 6258 82 76



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish









AMAZING LIGHT FIXTURE



I love this ceiling fan. It took minutes to install, it is exceptionally beautiful, and the quality of the piece is outstanding. You can not hear it when it is on, which is important because it is in my bedroom. I love the color, it is kind of an espresso wood color. Because mine is so beautiful, my mother went and bought one! I plan to have one in every room of my house.

- Kayla McCoy | Gibraltar, MI



Jade LED

The Japanese art of origami is known for turning a flat plane into a sculpture. Jade's intricately engineered folds work in harmony to move air effectively.







Blades (3) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 23.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.55 on High

RPM 159 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER – FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER – FULL FUNCTION 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.







COORDINATED LIGHTING

To see the complete Branches Collection



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish














HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 13.75"	B: 12.75"	C: 9.25"	D: 6.75"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5439	66	82	



THE BEST CEILING FAN I HAVE EVER OWNED!



This ceiling fan has both a beautiful modern sleek design as well as superior functionality.
The 60 inch span and unique design of the blades provides amazing air flow. The instructions were easy to follow and install was simple. I would highly recommend this product to anyone who wants an above average ceiling fixture.

- AshlyKaye | Orange, VA




Flyy™ LED

Nature knows best: With a blade shape and form modeled after the wings of a bird, the Flyy fan moves air with silent precision.





60" Flyy™LED

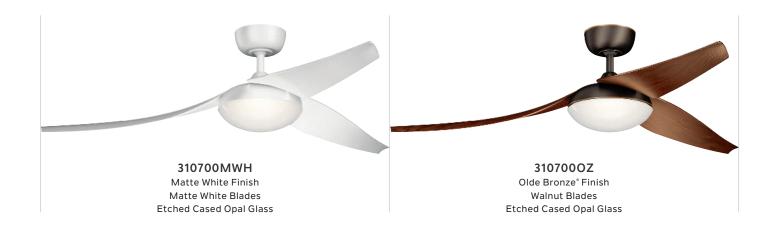

οz

Olde

Bronze

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30 $^{\circ}$ or 7/12

Lead Wire 78"

cUL Listed Damp

Hanging Weight 15.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-188mm X 10mm

Amps 0.46 on High

RPM 160 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER – FULL FUNCTION 371075 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.







Blade Finish & Part Number (Side 1) (Reversible) Matte White FB310700 MWH MWH FB310700 MWH FB310700 MWH FB310700 MWH FB310700 MWH

BLADE SPECS




Walnut

HANGING MEASUREMENTS

WITH 6" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.25"	B: 13.50"	C: 10.75"	D: 6.75"



AIR PERFORMANCE AIRFLOW AIRFLOW POWER Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 7656 33 236







FAN-TASTIC FAN!

This fan is great! It was easy to install for my husband and the directions were simple enough to follow. The fan itself feels durable.

The design is flawless and looks great in the room. It is quiet and moves the perfect amount of air.

- MRRN | Michigan



Szeplo™ II LED

Inspired by industrial machinery, extruded aluminum blades are held by geometrically designed arm irons. Dimmable LED light adds perfect illumination to any room.






Shown:

300302WSP Weathered Steel Powder Coat Finish, Etched Cased Opal Glass, with Weathered Steel Blades

Szeplo™ II LED

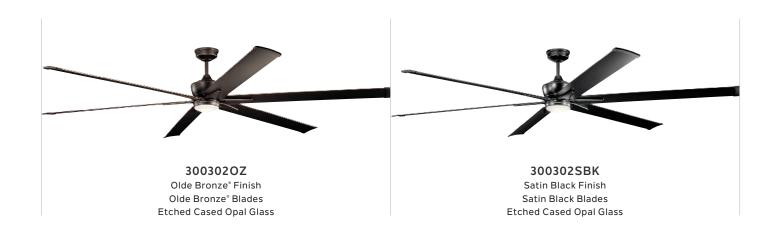

Fan Finish

οz

Olde

Bronze

SBK

BLADE SPECS

(Reversible)

Blade Finish & Part Number

(Side 1)

Olde

Bronze® FB300302

ΟZ

Satin

Black FB300<u>302</u>

SBK

INCLUDED FEATURES

Blades (6) Included

- 13° Pitch
- 96" Sweep
- Non-reversible
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Wet

Hanging Weight 34.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165L

Amps 0.39 on High

RPM 63 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER – FULL FUNCTION 371075 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.









Another great Kichler product! Having acquired this fan online, I was not sure about the materials and how it looked in person. The moment I "deboxed" and started putting this fan together, I knew it was another extremely great quality product from Kichler. This fan is huge, the blades are metal and can seriously put off some breeze. I also love the fact that if you are using it for outside and do not need the light kit, they already have a metal cover to go over it. Plus the wall mounted remote and switch is really convenient. I cannot praise Kichler enough, 2nd product from them and many more to come!

- jerebob1430 | West Jefferson, NC

HANGING MEASUREMENTS

WITH 6" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.25"	B: 14.00"	C: 8.75"	D: 6.75"



AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
12854	, ,				








В



Shown:

3003010Z Olde Bronze° Finish, Etched Cased Opal Glass, with Olde Bronze° Blades

80" Szeplo™II LED

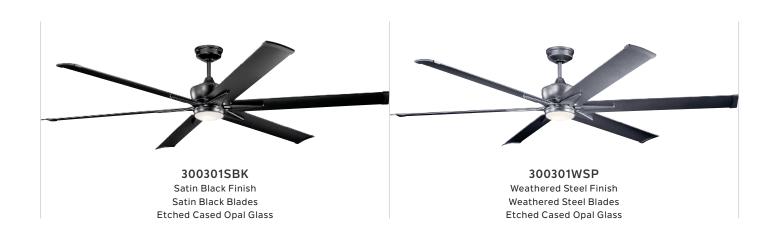

Blades (6) Included

- 13° Pitch
- 80" Sweep
- Non-reversible
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Wet

Hanging Weight 32.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165L

Amps 0.52 on High

RPM 91 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL **CONTROL SYSTEM**

- 6 Forward Speeds. Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 371075 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.







BLADE SPECS

Blade Finish & Part Number (Side 1)

(Reversible)

Fan Finish

Olde Bronze° FB300302 OZ












HANGING MEASUREMENTS

WITH ST DOWNDOD

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.25"	B: 14.00"	C: 8.75"	D: 6.75"



AIR PERFORMANCE			
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY	
Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt	
9890	35	282	









300300SBK Satin Black Finish, Etched Cased Opal Glass, with Satin Black Blades

60" Szeplo™II LED



Blades (6) Included

- 13° Pitch
- 60" Sweep
- Non-reversible
- Aluminum

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Wet

Hanging Weight 28.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe DC-165M

Amps 0.5 on High

RPM 140 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER – FULL FUNCTION 371075 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.







COORDINATING LIGHTING


To see the complete Bensimone™ Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 6" DOWNROD

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.25"	B: 14.00"	C: 8.75"	D: 6.75"



AIR PERFORMANCE **AIRFLOW POWER** AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 7308 32 225







BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Olde Bronze° FB300300 OZ













Bisc[™] LED

With a seamless globe and fan combination, Bisc provides balanced airflow in a style that's elegant and understated.





300710PNC Polished Nickel Finish, Crushed Crystal Glass, with Black Blades

56" Bisc LED



Blades (3) Included

- 14° Pitch
- 56" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Crushed Crystal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 15.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe DC-188mm X 10mm

Amps 0.26 on High

RPM 166 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER – FULL FUNCTION 371075 (Shown)

COORDINATING LIGHTING

To see the complete Moonlit Collection visit elan-lighting.com.



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB300710 MWH Silver FB300710 MWH
















HANGING MEASUREMENTS

WITH 6" DOWNROD

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.50"	B: 10.50"	C: 9.75"	D: 6.25"



AIR PERFORMANCE AIRFLOW POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 4879 17 285








Ferron™

As sleek and aerodynamic as a high-tech propeller, Ferron employs pure physics to create robust amounts of air. The streamlined motor housing and contoured blades work together to fill a room with style and comfort.



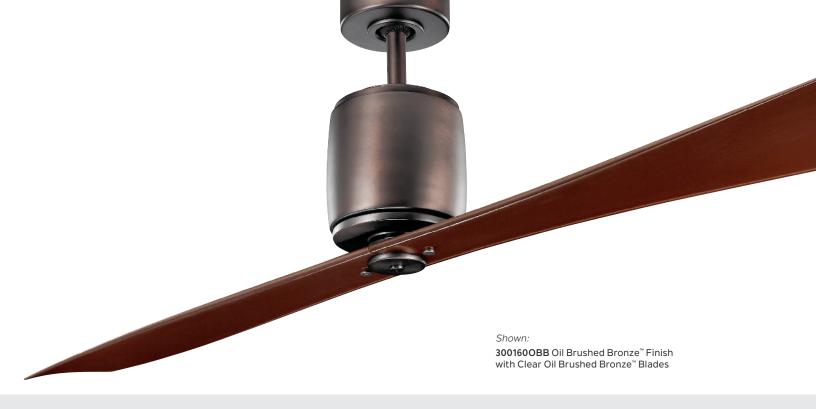

$60^{\text{II}} \; \text{Ferron}^{\text{\tiny{M}}}$



Blades (2) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- Polycarbonate

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Cooltouch™ Control System

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 16.7 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125

Amps 0.54 on High

RPM 112 on High

Energy Star® Yes

INCLUDED CONTROLS



6-SPEED DC COOLTOUCH™ CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



6-SPEED DC WALL TRANSMITTER – FULL FUNCTION 370036 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish














HANGING MEASUREMENTS

WITH 6" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 16.00"	B: 15.25"	C: 7.25"	D: 6.00"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5236 32 167



I LOVE THIS FAN!



This fan has a very easy transitional look, different than your normal 5 blade fans. It puts out the air! Fantastic in our office and always gets noticed.

- katiek85 | Dallas, TX



Terna™ LED

Terna offers the fun and whimsy of a pinwheel, modernized. The size and scale make it ideal for use in small spaces or in multiples. Think walk in closets, dining nooks or over a desk.





Shown:

3002300BB Oil Brushed Bronze[™] Finish, Etched Cased Opal Glass, with Oil Brushed Bronze[™] Blades

15"

Terna™ LED



300230NI Brushed Nickel Finish Champagne Blades Etched Cased Opal Glass



300230WH White Finish White Blades Etched Cased Opal Glass

Blades (5) Included

- 0° Pitch
- 15" Sweep
- Non-reversible
- Polycarbonate

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable, Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Cooltouch™ Control System -Full Function

FAN FEATURES

Mounting Slope - Pitch 22° or 4/12

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 15.9 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.25 on High

RPM 318 on High

Energy Star® No

INCLUDED CONTROLS



COOLTOUCH™ CONTROL SYSTEM -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -**FULL FUNCTION** 370038 (Shown)


BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish








HANGING MEASUREMENTS


WITH 4.50" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 20.00"	B: 19.25"	C: 10.50"	D: 6.25"




AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
359	32	11		





Terna™'s contoured blade design produces a unique outward airflow pattern to cool a wider area.

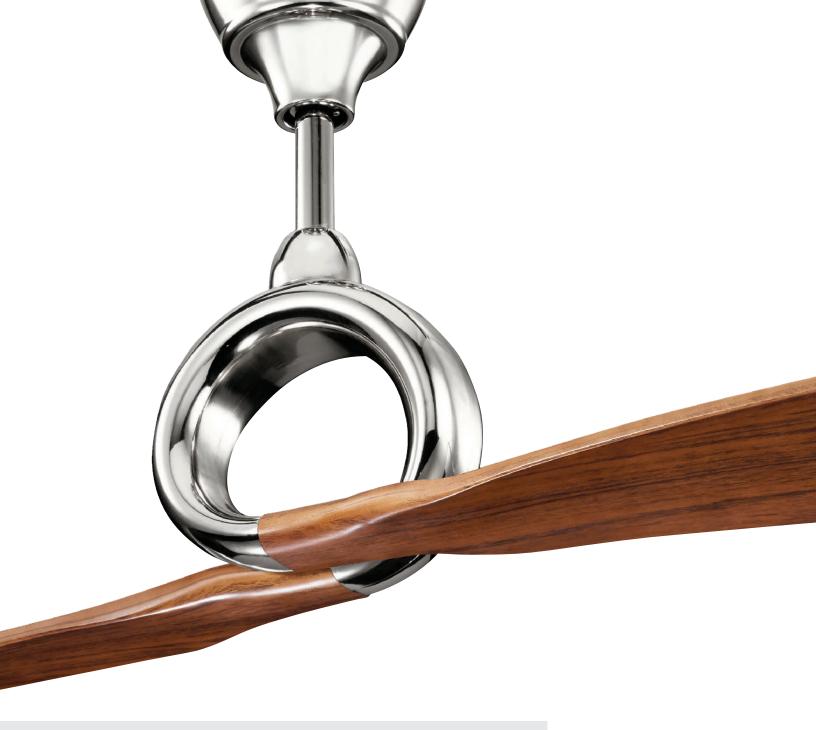


Link

With a unique center ring, the dual blades of the Link fan seem to flow into one seamless piece. In motion, Link moves a generous amount of air while creating an orbital focal piece.





54" Link

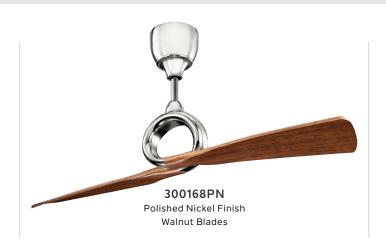

Blades (2) Included

- 28° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods Flush Mount Only

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Cooltouch™ Control System

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only

Lead Wire 8"

cETL Listed Indoor

Hanging Weight 18.7 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125

Amps 0.54 on High

RPM 132 on High

Energy Star® Yes

INCLUDED CONTROLS



6-SPEED DC COOLTOUCH™ **CONTROL SYSTEM**

- 6 Forward Speeds. Reverse & Motor Off
- Lights On/Off with Full
- -Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



6-SPEED DC WALL TRANSMITTER 370036 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish










HANGING MEASUREMENTS

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 24.25"	B: 24.25"	C: 7.90"	D: 8.00"



AIR PERFORMANCE **AIRFLOW** AIRFLOW **POWER** Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5780 31 184









Kichler® Fans

Grand in scale or small in stature. Inside living or outdoor entertaining. Our extensive collection leaves no detail to chance, with unique designs that not only look beautiful but move air efficiently and effectively.











Blades (3) Included

- Variable Pitch
- 56" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System -Full Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 15 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 16mm, AC

Amps 0.48 on High

RPM 120 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL SYSTEM - FULL **FUNCTION**

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 370006 (Shown)

COORDINATING LIGHTING

To see the complete Lakum™ Collection visit Kichler.com.




Pendant 43090CLP

HANGING MEASUREMENTS

WITH 6" DOWNDOD

WITH 6 DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.75"	D: 6.75"		



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5277 57 93



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

















Blades (3) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Frosted White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch™ - Limited Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 14.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC

Amps 0.6 on High RPM 207 on High

Energy Star® No

INCLUDED CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION** 371042 (Shown)

371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish



Silver FB300031



Matte White FB300031 MWH

Silver FB300031 MWH

MWH Matte White














HANGING MEASUREMENTS

WITH ST DOWNDOD

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.00" B: 12.50" C: 7.50" D: 6.00"			









Blades (3) Included

- Variable Pitch
- 48" Sweep
- Non-reversible
- ABS

Downrods Flush Mount Only

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Frosted White Polycarbonate Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control – Full Function

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only

Lead Wire 12"

cETL Listed Indoor

Hanging Weight 15 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.48 on High

RPM 226 on High Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL -**FULL FUNCTION**

- 3 Forward Speeds. Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 370006 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB300032 MWH

MWH Matte White














HANGING MEASUREMENTS


FLUSH MOUNT

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 10.25"	B: 7.75"	C: 7.75"	D: 7.75"







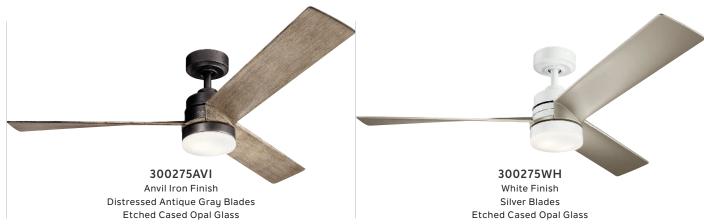

Blades (3) Included

- 13° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Dual Slide Control

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 13.5 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC

Amps 0.53 on High

RPM 162 on High

Energy Star® No

INCLUDED CONTROLS



DUAL SLIDE CONTROL

- All-Speed Fan & Light Control
- Controls One Fan and Light
- Full-Range Dimming Light Control
- Faceplate Included
- For Use with Most Ceiling Fans

OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

COORDINATING LIGHTING


To see more from these collections



HANGING MEASUREMENTS

WITH 6" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.50"	B: 9.00"	C: 7.00"	D: 6.00"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Cubic Ft. Per Minute Watts on High on High Per Minute (Excludes Per Watt Lights) 5056 63 80



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish















60" Rana™LED



Blades (3) Included

- 35° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 25.1 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.59 on High

RPM 206 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.





BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish










HANGING MEASUREMENTS

WITH ST DOWNDOD

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.75" B: 14.50" C: 8.75" D: 5.75			







38"/48"/58" Arkwright™ Motor Assembly



3001460BB
Oil Brushed Bronze™ Motor
Assembly Finish
3700250BB 38" Walnut Blades
3382030BB LED Light Kit
(Blades and Light Kit Sold Separately)



300146PN
Polished Nickel Motor
Assembly Finish
370027PN 58" Sapelle Blades
(Blades Sold Separately)



300146WH White Motor Assembly Finish 370029WH 48" Clear White/ Silver Speck Blades (Blades Sold Separately)



300146AP
Antique Pewter Motor
Assembly Finish
370025AP 38" Light Cherry Blades
(Blades Sold Separately)



300146AP
Antique Pewter
Motor Assembly Finish
370030AP 58" Clear Black Blades
(Blades Sold Separately)



300146AP
Antique Pewter
Motor Assembly Finish
370027AP 58" Cherry Blades
(Blades Sold Separately)



3001460BB Oil Brushed Bronze™ Motor Assembly Finish 3700300BB 58" Clear Oil Brushed Bronze™ Blades (Blades Sold Separately)



300146WH White Motor Assembly Finish 370030WH 58" Clear White/ Silver Speck Blades (Blades Sold Separately)

Blades (3) Included

- 13° Pitch
- Multiple Blade Sweep Options
- Wood (Reversible) or Polycarbonate (Non-Reversible)

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight Accessory Light Kits available on pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC CoolTouch™

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 12.3 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125

Amps 0.46 on High

RPM 176 on High

Energy Star® Yes (When paired with 370027 or 370030 blades)

INCLUDED CONTROLS



DC COOLTOUCH™ TRANSMITTER -**FULL FUNCTION**

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



6-SPEED DC WALL TRANSMITTER -**FULL FUNCTION** 370036 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish









Customize Arkwright[™] to your personal style in 4 easy steps:


- Choose Fan Finish
- Light Kit
- Blade Material
- Blade Length

See pages 122-123.

HANGING MEASUREMENTS

WITH AT DOWNEROD

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.25" B: 12.75" C: 7.50" D: 6.00			



AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
5779 32 178				



Arkwright[™] Ordering Guide

STEP

Choose Motor Assembly in One of Four Finishes



Antique Pewter 300146AP



Oil Brushed Bronze™ 3001460BB



Polished Nickel 300146PN



White 300146WH

STEP

2

Choose Optional Light Kit to Match Fan Finish or Mix n' Match



338203AP LED

___ or __



3382030BB LED

— or —



338203PN LED

---- or --



___ or ___



380047AP Incandescent



3800470BB Incandescent



380047PN Incandescent



380047WH Incandescent



LED 338203AP, OBB, PN, WH

Etched Cased Opal Glass 17W LED Platform, 1,600 Lumens, 80 CRI, 3,000K CCT, 2.00" $\rm H\,x\,7.50$ " D, Module Included

Incandescent 380047AP, OBB, PN, WH

Etched Cased Opal Glass (1) E11, 100W Halogen, 2.00" H x 7.50" D, Lamp Included

Fan Body Finish	Optional Light Kit - LED	Optional Light Kit - Incandescent
Antique Pewter - 300146AP	338203AP	380047AP
Oil Brushed Bronze™ - 300146OBB	338203OBB	380047OBB
Polished Nickel - 300146PN	338203PN	380047PN
White - 300146WH	338203WH	380047WH

STEP

3

Choose Blade Material (Wood or Polycarbonate) and Finish

Wood Reversible Blade Sets



Polycarbonate Non-Reversible Blade Sets



STEP

4

Choose Blade Length (58", 48" or 38")

Three Blade Lengths to Choose from

58" Blade

48" Blade

38" Blade

Ordering Example

If you chose the Antique Pewter motor assembly, order 300146AP.

Then

You might order the matching Incandescent Light Kit, order 380047AP.

Then

Finally, you choose the Polycarbonate Clear Black 58" Blade Sets, order 370030AP.



300146AP



380047AP





Blade Material & Finish	Blade Length 38"	Blade Length 48"	Blade Length 58"
Reversible Wood - Light Cherry/Cherry Blades	370025AP	370026AP	370027AP
Reversible Wood - Walnut/Cherry Blades	370025OBB	370026OBB	370027OBB
Reversible Wood - Maple/Sapelle Blades	370025PN	370026PN	370027PN
Reversible Wood - White Blades	370025WH	370026WH	370027WH
Polycarbonate - Clear Black Blades	370028AP	370029AP	370030AP
Polycarbonate - Clear Oil Brushed Bronze™ Blades	370028OBB	370029OBB	370030OBB
Polycarbonate - Clear Champagne/Silver Blades	370028PN	370029PN	370030PN
Polycarbonate - Clear White/Silver Speck Blades	370028WH	370029WH	370030WH





Blades (3) Included

- 13° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 13.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC

Amps 0.43 on High

RPM 177 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

OPTIONAL LED DOWNLIGHT



LED Light Kit 338629 MWH, WCP, WSP Etched Cased Opal Glass, 17W Dimmable Integrated LED Platform, 1,600 lm, 80 CRI, 3,000K 7.50" Dia. x 3.25" H





BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB339629 MWH














HANGING MEASUREMENTS

WITH 4.5" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 13.5" B: 11.00" C: 7.50" D: 6.00"				




AIR PERFORMANCE					
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY			
Per Minute Watts on High Cubic Ft. on High (Excludes Per Minute					
og	Lights)	Per Watt			
5024	j ,				





54" Lehr™ II

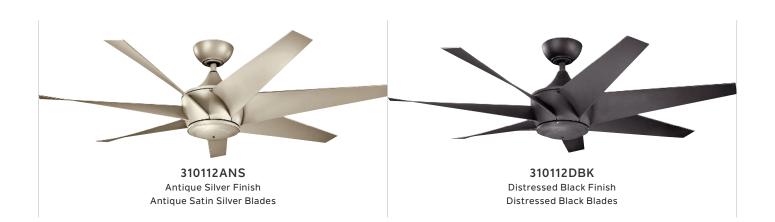

Blades (7) Included

- 12° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods 8" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC CoolTouch™ Control System

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Wet

Hanging Weight 15.2 lbs.

Body Material ABS

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125

Amps 0.54 on High

RPM 106 on High

Energy Star® Yes

INCLUDED CONTROLS



6-SPEED DC COOLTOUCH™ CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



6-SPEED DC WALL TRANSMITTER – FULL FUNCTION 370036 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Antique Satin Silver FB310112 ANS












HANGING MEASUREMENTS

WITH 8" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.50"	B: 13.50"	C: 10.25"	D: 6.75"












80^{II} Lehr II

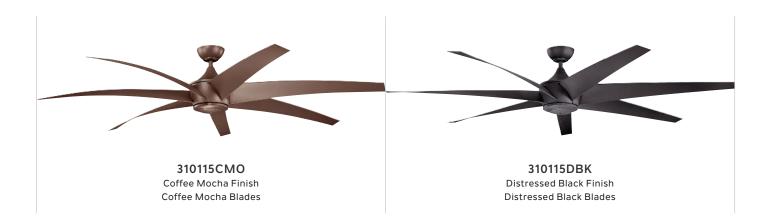

Blades (7) Included

- 12° Pitch
- 80" Sweep
- Non-reversible
- ABS

Downrods 8" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC CoolTouch™ Control System

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Wet

Hanging Weight 22 lbs.

Body Material ABS

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-165L

Amps 0.56 on High

RPM 78 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC COOLTOUCH™ CONTROL SYSTEM

- 6 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



6-SPEED DC WALL TRANSMITTER -FULL FUNCTION 370036 (Shown)

COORDINATING LIGHTING

To see the complete LED Outdoor Wall Collection visit Kichler.com.



Outdoor Wall Sconce 11309BKTLED

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Antique Satin Silver FB310115 ANS












HANGING MEASUREMENTS

WITH 8" DOWNROD


Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.50"	B: 13.50"	C: 10.25"	D: 6.75"







52" Cameron™

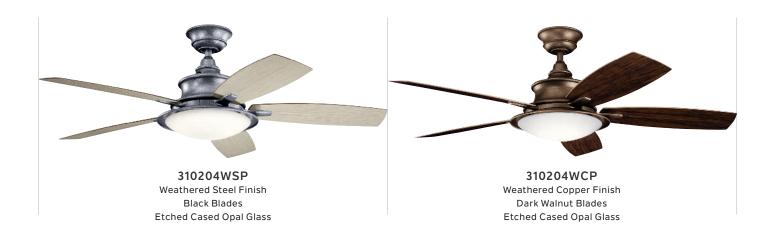

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 23W Dimmable, 2300 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch™ Transmitter -Limited Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 26.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.52 on High

RPM 165 on High

Energy Star® No

INCLUDED CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION 370039 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


















HANGING MEASUREMENTS

WITH 4" DOWNDOD

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 16.25"	B: 12.00"	C: 14.75"	D: 7.00"	









56" Ellys LED



Blades (7) Included

- 14° Pitch
- 56" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 18.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe DC-165M

Amps 0.51 on High

RPM 156 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL **CONTROL SYSTEM**

- 6 Forward Speeds. Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 371075 (Shown)

COORDINATING LIGHTING

To see the complete Cirus™ Collection visit Kichler.com.






Mini Pendant 43755AUB

HANGING MEASUREMENTS

WITH ST DOWNDOD

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 17.00"	B: 12.75"	C: 9.50"	D: 6.75"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 6306 30 202



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish











Blades (5) Included

- 12° Pitch
- 44" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17 Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Frosted White

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control 65K Wall Control – Full Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 11 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 12mm, AC

Amps 0.42 on High

RPM 192 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL -**FULL FUNCTION**

- 3 Forward Speeds. Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 370006 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish




















HANGING MEASUREMENTS

WITH 6" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.25"	B: 13.50"	C: 7.75"	D: 6.50"



FLUSH MOUNT

Fixture Drop	Blade Drop	Housing (width)	Ceiling Canopy
(from ceiling)	(from ceiling)		(width)
A: 10.25"	B: 8.50"	C: 7.75"	D: 6.50"




AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
3445 52 116				

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3191 51 66			



54" Skye^m LED

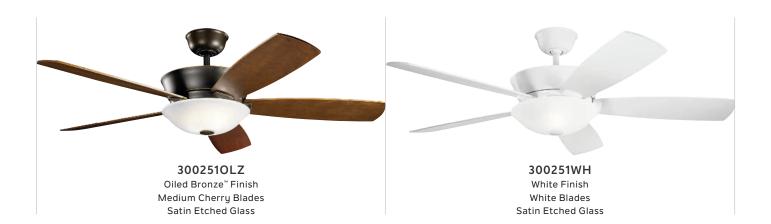

Blades (5) Included

- 14° Pitch
- 54" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Includes(2) 5W Dimmable Lamp

Downlight Glass Satin Etched Glass

Optional Downlight See pages 266-270

Uplight Uses (2) B10, 5W LED Bulbs

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 30 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.82 on High

RPM 194 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 337009 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish














White FB300251 WH



HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.00"	B: 11.75"	C: 13.75"	D: 6.75"









Blades (3) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- Wood

Downrods Flush Mount Only

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Low Ceiling Adaptable

Control 65K Wall Control System -Limited Function

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only

Lead Wire 8"

cETL Listed Indoor

Hanging Weight 18.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 20mm, AC

Amps 0.45 on High

RPM 189 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

- 3 Forwards Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 370005 (Shown)

COORDINATING LIGHTING


To see more from these collections visit Kichler.com



HANGING MEASUREMENTS

FLUSH MOUNT

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 10.50"	B: 7.50"	C: 7.00"	D: 7.00"	



AIR PERFORMANCE **AIRFLOW POWER** AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Cubic Ft. Per Minute Watts on High on High Per Minute (Excludes Per Watt Lights) 4245 54 79



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish











60" Trevor®IILED



Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 23W Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Control - Full Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 34.5 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 188mm X 25mm, AC

Amps 0.66 on High RPM 138 on High Energy Star® No

INCLUDED CONTROLS



WALL CONTROL -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 337009 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish














HANGING MEASUREMENTS

WITH 6" DOWNROD

= =			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.00"	B: 11.75"	C: 14.00"	D: 5.75"



AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
6039 80 76				







Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood Veneer

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 11.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 20mm, AC

Amps 0.69 on High

RPM 144 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION** 371042 (Shown) 337001 371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish














HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.50"	B: 13.50"	C: 12.25"	D: 6.75"



AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
6698	82	81



52" Lacey II LED



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 6-Speed DC Wall Control System

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 19.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type DC-125

Amps 0.48 on High

RPM 174 on High

Energy Star® No

INCLUDED CONTROLS



6-SPEED DC WALL **CONTROL SYSTEM**

- 6 Forward Speeds. Reverse & Motor Off
- Lights On/Off with Full-Range Dimming
- No More Than Two Fans on One Circuit

OPTIONAL CONTROLS



DC COOLTOUCH™ TRANSMITTER -**FULL FUNCTION**

371075 (Shown)

COORDINATING LIGHTING


To see the complete $Lacey^{\mathsf{m}}$ Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 6" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 16.75"	B: 11.75"	C: 11.00"	D: 6.75"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5748 35 166



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish



















Blades (3) Included

- 14° Pitch
- 52" Sweep
- Non-reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 17.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 153mm X 18mm, AC

Amps 0.44 on High

RPM 143 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.









COORDINATING LIGHTING

To see the complete Maclain Collection visit Kichler.com.






HANGING MEASUREMENTS

WITH 4 50" DOWNDOD

WITH 4.50 DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.25"	B: 13.25"	C: 6.75"	D: 5.75"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 4388 50 87



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish



















60" Lyndon Patio



Blades (5) Included

- 13° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight 5W, Non-Dimmable, LED

Downlight Glass Clear Seeded Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 12.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.64 on High

RPM 127 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Lyndon™ Collection visit Kichler.com.






Outdoor Wall 49444AZ

HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 19.00"	B: 13.25"	C: 9.50"	D: 6.75"



AIR PERFORMANCE AIRFLOW POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High Per Minute on High (Excludes Per Watt Lights) 5393 74 72



BLADE SPECS

Blade Finish & Part Number (Reversible) (Side 1)

Fan Finish



Dark Walnut FB310240 ΟZ









60" KICHLER LYNDON™ PATIO CEILING FAN



This is an amazing ceiling fan. It was very easy to install and works great. I love that I don't have to worry about it getting wet and breaking during a bad storm since its meant for outdoor use however, you're able to use it indoors also.

- Melissa M | Florida



52" Lyndon Patio



Blades (5) Included

- 13° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight 5W, Non-Dimmable, LED

Downlight Glass Clear Seeded Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 10.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 15mm, AC

Amps 0.54 on High

RPM 161 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Lyndon™ Collection visit Kichler.com.

> Outdoor Pendant 49447AZ






HANGING MEASUREMENTS

WITH 4 50" DOWNBOD

WITH 4.50 DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 19.00"	B: 13.25"	C: 9.50"	D: 6.75"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 4946 65 77



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish















60^{II} Ahrendale LED



Blades (5) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 3000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control System -Full Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Wet

Hanging Weight 34 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.6 on High

RPM 145 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL SYSTEM - FULL FUNCTION

- 3 Forward Speeds, Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 370006 (Shown)

COORDINATING LIGHTING

To see the complete $\mathsf{Ahrendale}^{\scriptscriptstyle{\mathsf{T}}} \mathsf{LED}$ Collection visit Kichler.com.



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish














HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.50"	B: 9.75"	C: 11.75"	D: 6.75"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5763 72 80





65" Eads™ Patio XL



Blades (4) Included

- 14° Pitch
- 65" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 34 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC

Amps 0.87 on High

RPM 139 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

COORDINATING LIGHTING

To see the complete Andover Collection visit Kichler.com.



BLADE SPECS

Blade Finish & Part Number (Reversible) (Side 1)

Fan Finish










HANGING MEASUREMENTS

WITH	4.50"	DOW	NROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 14.00"	B: 11.00"	C: 11.00"	D: 7.25"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
8130	101	81	







Blades (4) Included

- 14° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 25 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC

Amps 0.66 on High

RPM 201 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

COORDINATING LIGHTING

To see the complete Andover Collection visit Kichler.com.



Outdoor Post 49869WZC




Pendant 49867WZC

HANGING MEASUREMENTS

WITH A FOIL DOWNING

WITH 4.50" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 11.00"	C: 11.00"	D: 7.25"



AIR PERFORMANCE AIRFLOW **AIRFLOW POWER** Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5904 78 76



BLADE SPECS

Blade Finish & Part Number (Reversible) (Side 1)

Fan Finish












65" Maor Patio LED

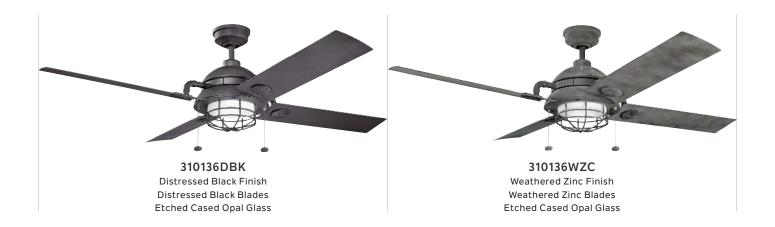

Blades (4) Included

- 13° Pitch
- 65" Sweep
- Non-reversible
- Aluminum

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Damp

Hanging Weight 38.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 20mm, AC

Amps 0.72 on High

RPM 132 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish















HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 17.50"	B: 12.00"	C: 13.00"	D: 6.75"











52" Leeds™ LED



Blades (5) Included

- 13° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable Lamp

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 25.7 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.59 on High

RPM 189 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING

To see the complete Joelson™ Collection visit Kichler.com.



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish




















HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 17.00"	B: 13.00"	C: 10.25"	D: 6.25"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 6326 70 90





52" Carlson[™] LED



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Dimmable, 1600 Lumens, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -Limited Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 20.1 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC

Amps 0.6 on High

RPM 183 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

COORDINATING LIGHTING


To see the complete Circolo™ Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH AT DOWNEROD

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 16.50"	B: 11.50"	C: 12.00"	D: 6.50"



AIR PERFORMANCE **AIRFLOW POWER** AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 6195 71 88



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

















Blades (4) Included

- 14° Pitch
- 54" Sweep
- Reversible (SBK)
- Non-Reversible (WZC)
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 3000K

Downlight Glass Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Wet

Hanging Weight 35.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 188mm X 25mm, AC

Amps 0.5 on High RPM 167 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

COORDINATING LIGHTING

To see the complete Seaside™ Collection visit Kichler.com.



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish












HANGING MEASUREMENTS

WITH 6" DOWNDOD

WITH 6 DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 20.00"	B: 10.50"	C: 15.00"	D: 6.25"	



AIR PERFORMANCE **AIRFLOW POWER** AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5564 60 93





70" Monarch™ Patio



Blades (5) Included

- 16° Pitch
- 70" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter -

Full Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 30.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC

Amps 0.78 on High

RPM 122 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 337009 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish














HANGING MEASUREMENTS

WITH 6" DOWNROD

=				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 18.25"	B: 16.25"	C: 15.00"	D: 6.75"	



AIR PERFORMANCE **AIRFLOW** AIRFLOW **POWER** Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 8398 94 89





$70^{\text{II}} \text{ Monarch}^{\text{M}}$





Blades (5) Included

- 16° Pitch
- 70" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 30.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 212mm X 25mm, AC

Amps 0.8 on High

RPM 128 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 337009 (Shown)

COORDINATING LIGHTING

To see the complete Missoula™ Collection visit Kichler.com.



OPTIONAL BLADE SET



371050 Weathered White Walnut Solid Wood Blades

Cherry

Blade Finish & Part Number



BLADE SPECS

(Reversible)

BAP Burnished Antique Pewter

Fan Finish



(Side 1)

FB300206 BAP
















WH White

HANGING MEASUREMENTS

WITH 6" DOWNROD

WITTO DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 18.00"	B: 16.25"	C: 15.00"	D: 6.75"	



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Watts on High Cubic Ft. on High Per Minute (Excludes Per Watt Lights) 9411 97 97



52" Monarch[™] II Select LED



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight B10, 4W LED Lamps

Downlight Glass Satin Etched Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control CoolTouch™ Transmitter -Limited Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 24.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC

Amps 0.68 on High

RPM 163 on High

Energy Star® No

INCLUDED CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION 370039 (Shown)

COORDINATING LIGHTING

To see the complete Missoula™ Collection visit Kichler.com.



Pendant 78200AP

BLADE SPECS

Blade Finish & Part Number (Side 1)

(Reversible)

Fan Finish




















HANGING MEASUREMENTS

WITH AT DOWNEROD

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 19.00"	B: 12.00"	C: 13.75"	D: 6.75"	



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Watts on High Cubic Ft. on High Per Minute (Excludes Per Watt Lights) 5472 81 68





52" Monarch[™] II



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control CoolTouch™ Transmitter -Limited Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 20.7 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC

Amps 0.63 on High

RPM 176 on High

Energy Star® No

INCLUDED CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION 370039 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish




















HANGING MEASUREMENTS

WITH 4" DOWNBOD


WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 13.25"	B: 12.75"	C: 13.75"	D: 6.75"	



AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
4889	73	67		



52" Monarch™ II Patio

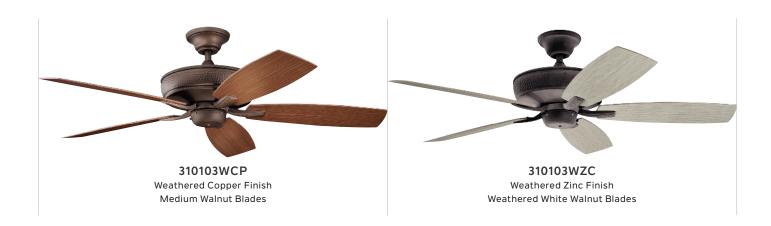

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control CoolTouch™ Transmitter -Limited Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Wet

Hanging Weight 25.9 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 17mm, AC

Amps 0.68 on High

RPM 163 on High

Energy Star® No

INCLUDED CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION 370039 (Shown)

COORDINATING LIGHTING

To see the complete Springfield Collection visit Kichler.com.






Outdoor Wall 49986DBK

HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 14.50"	B: 12.75"	C: 13.75"	D: 6.75"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5532 82 68



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish





















Blades (4) Included

- 13° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight see pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Wet

Hanging Weight 17.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.55 on High

RPM 165 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

COORDINATING LIGHTING

To see the complete Beacon Square Collection visit Kichler.com.



49834OZ

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish












HANGING MEASUREMENTS

WITH 4 50" DOWNROD

WITH 4.50 DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.00"	B: 11.50"	C: 9.00"	D: 6.50"	



AIR PERFORMANCE **AIRFLOW POWER** AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 6246 65 96





52" Vassar™LED



Blades (3) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Wall Control – Limited Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 17.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC

Amps 0.52 on High

RPM 182 on High

Energy Star® No

INCLUDED CONTROLS



WALL CONTROL -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.









BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


























HANGING MEASUREMENTS

WITH AT DOWNEROD

WITH 4" DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 15.00"	B: 11.00"	C: 8.75"	D: 6.25"	



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 4811 59 81







Blades (3) Included

- 12° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Frosted White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 65K Wall Control – Full Function

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cETL Listed Damp

Hanging Weight 20 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 15mm, AC

Amps 0.6 on High

RPM 156 on High

Energy Star® No

INCLUDED CONTROLS



65K WALL CONTROL -**FULL FUNCTION**

- 3 Forward Speeds. Reverse & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



65K COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 370006 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.









BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


















HANGING MEASUREMENTS

WITH ST DOWNDOD

WITH 6" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.25"	B: 13.00"	C: 9.00"	D: 6.75"









54" Geno™LED





Blades (5) Included

- 14° Pitch
- 54" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Handheld Control System - Basic

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 24.5 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC

Amps 0.67 on High

RPM 157 on High

Energy Star® No

INCLUDED CONTROLS



HANDHELD CONTROL SYSTEM - BASIC

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -LIMITED FUNCTION 370039 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish



Silver FB330001 BSS
















Silver FB330001 SBK



HANGING MEASUREMENTS

WITH 4 50" DOWNBOD

WITH 4.50 DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.50"	B: 10.50"	C: 11.00"	D: 6.25"









Blades (5) Included

- 12° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 12" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 23W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Fresnel Lens

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Flush Mount Canopy included. Note: Décor trim must be removed for Flush Mount.

Control CoolTouch™ Control System -Full Function

FAN FEATURES

Mounting Slope - Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Damp

Hanging Weight 32.5 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 188mm X 25mm, AC

Amps 0.6 on High

RPM 157 on High

Energy Star® No

INCLUDED CONTROLS



COOLTOUCH™ CONTROL SYSTEM -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -**FULL FUNCTION** 370038MULTR (Shown)

COORDINATING LIGHTING

To see the complete Hatteras Bay™ Collection visit Kichler.com.

Outdoor Wall 49064OZ







BLADE SPECS

Blade Finish & Part Number (Reversible) (Side 1)

Fan Finish




















HANGING MEASUREMENTS

WITH 6" DOWNROD

mino bommob			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 17.50"	B: 13.00"	C: 15.50"	D: 6.75"



FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 12.25"	B: 7.75"	C: 15.50"	D: 6.75"



AIR PERFORMANCE AIRFLOW POWER **AIRFLOW** USAGE **EFFICIENCY** Cubic Ft. Per Minute Watts on High Cubic Ft. on High (Excludes Per Minute Lights) Per Watt 88 6282 71

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5449	71	77	



52" Hatteras Bay



310018DBK
Distressed Black Finish
Cherry Blades
Fresnel Lens Gloss White Inside-Clear Outside



310018WZC
Weathered Zinc Finish
Dark Walnut Blades
Fresnel Lens Gloss White Inside-Clear Outside

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 12" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 23W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Fresnel Lens Gloss White Inside-Clear Outside

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included. Note: Décor trim must be removed for Flush Mount.

Control CoolTouch™ Transmitter -Full Function

FAN FEATURES

Mounting Slope - Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Damp

Hanging Weight 33 lbs.

Body Material Steel, Plywood, Glass

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.69 on High

RPM 146 on High

Energy Star® No

INCLUDED CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -**FULL FUNCTION** 370038MULTR (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish




















HANGING MEASUREMENTS

WITH 12" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 22.50"	B: 18.50"	C: 15.25"	D: 6.75"



FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 11.25"	B: 7.25"	C: 15.25"	D: 6.75"




AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6124	82	75	

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4302	54	87	



52" Lucian™ LED

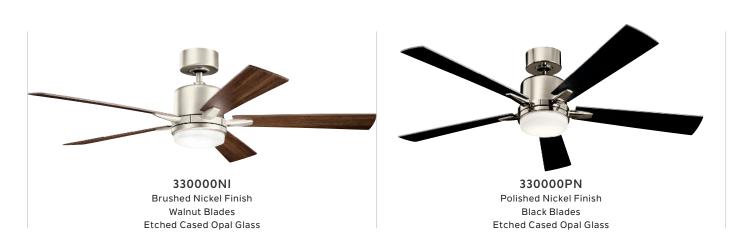



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 3-Speed Wall Control -Limited Function

FAN FEATURES

Mounting Slope - Pitch 18° Lead Wire 78" cUL Listed Indoor Hanging Weight 21.8 lbs. **Body Material Steel**

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.6 on High RPM 155 on High Energy Star® No

INCLUDED CONTROLS



3-SPEED WALL CONTROL -LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.









BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


























HANGING MEASUREMENTS

WITH AT DOWNEROD

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.25"	B: 10.25"	C: 7.50"	D: 6.00"







$60^{"}$ Kevlar"



Blades (5) Included

- 14° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Wet

Hanging Weight 26.2 lbs.

Body Material Aluminum

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 188mm X 25mm, AC

Amps 0.63 on High RPM 142 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish










HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.75"	B: 11.50"	C: 13.00"	D: 6.75"







$42^{\prime\prime} \; \text{Kevlar}^{^{\prime\prime}}$



Blades (5) Included

- 14° Pitch
- 42" Sweep
- Non-reversible
- ABS

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 17.9 lbs.

Body Material Aluminum

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 18mm, AC

Amps 0.4 on High RPM 231 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION** 371042 (Shown)

371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB310144 MWH








HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.75"	B: 11.50"	C: 13.00"	D: 6.75"







60" Kimberley



Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight Replaceable. Includes(3) 4W LED Lamp

Downlight Glass Umber Etched Marble Glass

Optional Downlight N/A

Uplight Includes (4) 4W, E12, LED Lamp

Uplight Glass N/A

Low Ceiling Adaptable No

Control CoolTouch™ Transmitter -Full Function

FAN FEATURES

Mounting Slope - Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 34.2 lbs.

Body Material Poly Resin

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC

Amps 0.72 on High

RPM 154 on High

Energy Star® No

INCLUDED CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



WALL TRANSMITTER -**FULL FUNCTION** 370038MULTR (Shown)

COORDINATING LIGHTING


To see the complete Camerena™ Collection visit Kichler.com.



HANGING MEASUREMENTS

WITH 6" DOWNDOD

WITH & DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 19.50"	B: 12.00"	C: 15.25"	D: 5.50"



AIR PERFORMANCE **AIRFLOW POWER** AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 6179 85 73



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish











52" Terra





Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 20.7 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC

Amps 0.6 on High RPM 161 on High Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION** 371042 (Shown) 337001 371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


























HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 12.50"	C: 12.50"	D: 6.75"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4593	71	65	





Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) 4W LED Platform, 80 CRI, 2700K

Downlight Glass White Etched Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 19.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC

Amps 0.56 on High

RPM 154 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL **SYSTEM - LIMITED FUNCTION** 371042MUL (Shown)

371082WH

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish



























HANGING MEASUREMENTS


WITH 4.50" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 20.75"	B: 12.50"	C: 12.50"	D: 6.75"









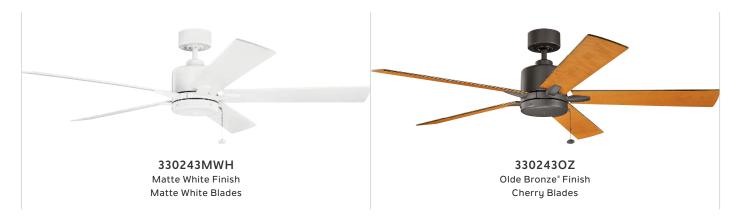

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 27.5 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC

Amps 0.57 on High

RPM 111 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 337001 371082

COORDINATING LIGHTING

To see the complete Shailene™ Collection visit Kichler.com.








HANGING MEASUREMENTS

WITH 4 50" DOWNBOD

WITH 4.50 DOWNROD				
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.25"	B: 11.50"	C: 8.00"	D: 6.00"	



AIR PERFORMANCE AIRFLOW **AIRFLOW POWER** Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5190 67 78

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB330243 MWH


















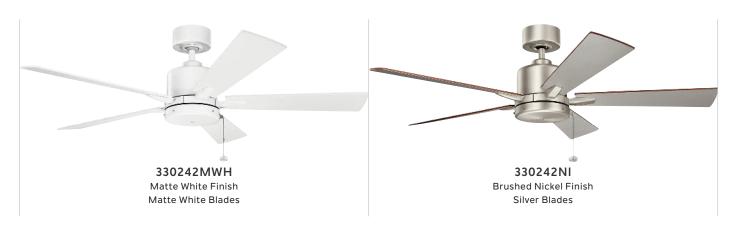

Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 16.1 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 14mm, AC

Amps 0.55 on High

RPM 159 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM – LIMITED FUNCTION

371042 (Shown) 337001 371082

COORDINATING LIGHTING

To see the complete Shailene $^{\text{\tiny T}}$ Collection visit Kichler.com.








WITH 4.50" DOWNROD

WITH 4.30 DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.75"	B: 11.00"	C: 8.00"	D: 6.00"



AIR PERFORMANCE AIRFLOW **AIRFLOW** POWER Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 4411 67 66

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB330242 MWH



















Blades (5) Included

- 14° Pitch
- 42" Sweep
- Non-reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 14.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.41 on High

RPM 199 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM – LIMITED FUNCTION

371042 (Shown) 337001 371082

COORDINATING LIGHTING

To see the complete Shailene $^{\text{\tiny M}}$ Collection visit Kichler.com.








HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.75"	B: 11.00"	C: 8.00"	D: 6.00"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 3402 48 70

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB330241 MWH

















$60^{\text{II}} \text{ Canfield}^{\text{M}} \text{XL}$





Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cETL Listed Indoor

Hanging Weight 27.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 212mm X 25mm, AC

Amps 0.7 on High

RPM 148 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM – LIMITED FUNCTION

371042 (Shown) 337001 371082

OPTIONAL BLADE SET



371050 Weathered White Walnut Solid Wood

Sold separately. See pages 274-275 for more blade options.

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish
























HANGING MEASUREMENTS

WITH 4" DOWNROD

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 11.25"	C: 13.75"	D: 6.25"





$60^{"}$ Canfield XL Patio



Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 29.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 212mm X 25mm, AC

Amps 0.68 on High

RPM 167 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM – LIMITED FUNCTION 371042 (Shown) 371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish














HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 14.00"	B: 11.25"	C: 13.75"	D: 6.25"







52" Canfield[™] Pro LED



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Satin Etched Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control Wall Control – Limited Function

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 23.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.55 on High

RPM 157 on High

Energy Star® No

INCLUDED CONTROLS



WALL CONTROL-LIMITED FUNCTION

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -LIMITED FUNCTION 337214TR (Shown)

OPTIONAL BLADE SETS



371030 Weathered White Walnut Solid Wood



371031 **Shadowed Walnut** Solid Wood

Sold separately. See pages 274-275 for more blade options.

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish




















HANGING MEASUREMENTS

WITH AT DOWNEROD

WITH 4" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 17.25"	B: 11.00"	C: 12.50"	D: 6.25"









Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Dimmable, 1600 Lumens, 80CRI, 3000K

Downlight Glass Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 18.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.49 on High

RPM 159 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

OPTIONAL BLADE SET



Sold separately. See pages 274-275 for more blade options.

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish














HANGING MEASUREMENTS

WITH 4" DOWNDOD

WITH 4 DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 17.00"	B: 10.50"	C: 11.00"	D: 6.25"







$52^{\prime\prime} \;\; \mathsf{Canfield}^{^{\prime\prime}}$





Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 19.7 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 172mm X 20mm, AC

Amps 0.54 on High

RPM 155 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 337001 371082

OPTIONAL BLADE SETS



371030 Weathered White Walnut Solid Wood



371031 Walnut Shadowed Solid Wood

Sold separately. See pages 274-275 for more blade options.

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

















MWH Matte White


















HANGING MEASUREMENTS

WITH 4" DOWNDOD

WIII 4 DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 13.50"	B: 10.75"	C: 12.50"	D: 6.25"



AIR PERFORMANCE		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
4868	66	74



52"/54"/56" Canfield™ Motor Assembly





Blades (5) Included

- 14° Pitch
- Multiple Sweeps
- Optional ABS or Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Wet

Hanging Weight 19.9 lbs.

Body Material ABS

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 188mm X 25mm, AC

Amps 0.61 on High

RPM 180 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION**

371042 (Shown) 371082

ACCESSORY **BLADE OPTIONS**

Blades sets sold separately. Choose your fan finish and then the perfect matching blade set. See more on pages 274-275.



371017 **W** Walnut Shadowed -All-Weather ABS Blades



371021 **D** Ivory with Walnut Highlights -Solid Wood



370021 W White Washed Oak All-Weather ABS Blades



371019 W Aged White -All-Weather

ABS Blades

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

ANS Antique Satin





Customize Canfield™ to your personal style in 3 easy steps:


- Choose Fan Finish
- Light Kit (see pg. 268)
- Blade Material (see pgs. 274-275)

See additional Damp- and Wet-rated light fixtures on pages 266-268. Find additional downrod lengths and finishes on page 276.

HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 13.00"	B: 11.25"	C: 12.50"	D: 6.75"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
6231 73 86			





52" Canfield[™] Patio



Blades (5) Included

- 14° Pitch
- 52" Sweep
- Reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Wet

Hanging Weight 24.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 172mm X 20mm, AC

Amps 0.59 on High RPM 185 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM - LIMITED **FUNCTION** 371042 (Shown)

371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish




























HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 13.25"	B: 11.00"	C: 12.50"	D: 6.25"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 5481 71 78







Blades (5) Included

- 16° Pitch
- 44" Sweep
- Reversible
- Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, with Optional Flush Mount Accessory 337008 on page 265

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 18°

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 18.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 172mm X 20mm, AC

Amps 0.53 on High RPM 204 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM – LIMITED FUNCTION 371042 (Shown) 337001 371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


















HANGING MEASUREMENTS

WITH 6" DOWNROD

WITH O DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.00"	B: 12.00"	C: 11.00"	D: 5.50"



AIR PERFORMANCE				
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt		
4230 61 69				







Blades (5) Included

- 24° Pitch
- 30" Sweep
- Reversible
- UV Coated Wood

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount

Included

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Damp

Hanging Weight 14.8 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 17mm, AC

Amps 0.33 on High **RPM** 232 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM – LIMITED FUNCTION 371042 (Shown) 337001

371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


















HANGING MEASUREMENTS

WITH 6" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 12.75"	C: 9.75"	D: 6.00"



FLUSH MOUNT

Fixture Drop	Blade Drop	Housing (width)	Ceiling Canopy
(from ceiling)	(from ceiling)		(width)
A: 8.75"	B: 6.50"	C: 9.75"	D: 6.00"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
2439	40	61	

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
1491 40 37			







Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrods with 1" (O.D.)

Downlight Replaceable. (3) E12, 4W, B10 LED Lamps, 2700K

Downlight Glass Satin Etched, White Alabaster, Umber Etched

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Indoor

Indoor 18.6 lbs.

Hanging Weight 18.6 lbs.

Body Material Steel, Plywood, Glass

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.42 on High

RPM 152 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL SYSTEM -LIMITED FUNCTION 371042 (Shown) 337001 371082

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish
























HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 18.00"	B: 10.75"	C: 12.00"	D: 5.75"



FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.25"	B: 8.00"	C: 12.00"	

AIR PERFORMANCE			
IRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3915	48	82	

AIR PERFORMANCE (FLUSH)		
AIRFLOW POWER AIRFLOW Cubic Ft. USAGE EFFICIENCY		
Per Minute Watts on High Cubic Ft. on High (Excludes Per Minute Lights) Per Watt		
3615 47 76		





The Motu[™] fan blades must be mounted a minimum of 10' from the floor.

Blades (3) Included

- 35° Pitch
- 60" Sweep
- Non-reversible
- ABS

Downrods 6" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 4-Speed Fan Slide Control

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 24 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 25mm, AC

Amps 0.86 on High RPM 261 on High

Energy Star® No

INCLUDED CONTROLS



4-SPEED FAN SLIDE CONTROL

- 4-Speed Fan Control
- Faceplate Included
- Controls One Fan
- For Use with Most Ceiling Fans

OPTIONAL CONTROLS



4-SPEED WALL CONTROL - ROTARY 370040 (Shown) 370032

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish










HANGING MEASUREMENTS


WITH 6" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.50"	B: 14.50"	C: 8.75"	D: 5.75"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
10253	100	103	



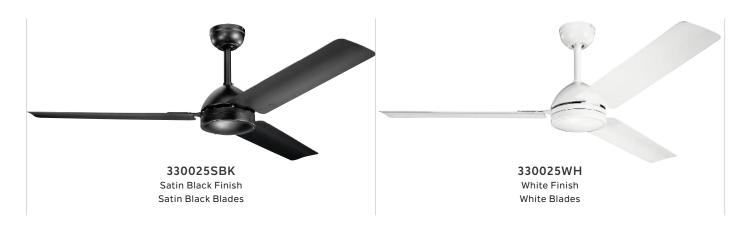

The Todo™ fan blades must be mounted a minimum of 10' from the floor.

Blades (3) Included

- 6.5° Pitch
- 56" Sweep
- Non-reversible
- Steel

Downrods 8" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control 4-Speed Wall Slide Control

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 18.3 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm X 20mm, AC

Amps 0.79 on High **RPM** 267 on High

Energy Star® No

INCLUDED CONTROLS



4-SPEED FAN SLIDE CONTROL

- 4-Speed Fan Control
- Faceplate Included
- Controls One Fan
- For Use with Most Ceiling Fans

OPTIONAL CONTROLS



4-SPEED WALL CONTROL – ROTARY 370040 (Shown) 370032

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Brushed Stainless Steel FB330025 BSS








White FB330025 WH



HANGING MEASUREMENTS

WITH 8" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 12.25"	C: 7.50"	D: 5.25"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
8666	91	95	





Blades (3) Included

- 10° Pitch
- 24" Sweep
- Non-reversible
- Steel

Downrods N/A

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only

Lead Wire

cUL Listed Wet

Hanging Weight 37.7 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type PSC139-640, AC

Amps 2.65 on High

RPM 0 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- Oscillating



BLADE SPECS

Blade Finish & Part Number (Reversible) (Side 1)

Fan Finish


Brushed Nickel







HANGING MEASUREMENTS

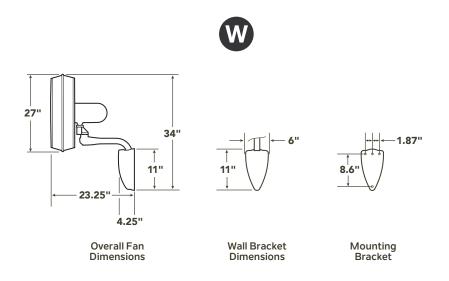



18[™] Pola[™]



Blades (3) Included

- 10° Pitch
- 18" Sweep
- Non-reversible
- Steel

Downrods N/A

Downlight N/A

Downlight Glass N/A

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only

Lead Wire

cUL Listed Wet

Hanging Weight 25.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type PSC127-625C, AC

Amps 2 on High

RPM 0 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- Oscillating



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


Brushed Nickel







HANGING MEASUREMENTS

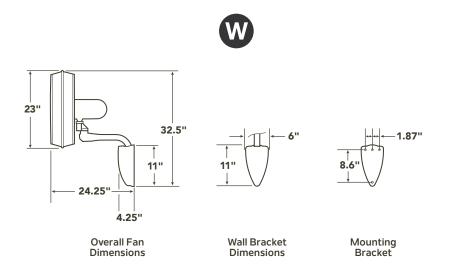





(Sold Separately)

Satin

Black

οz

Olde

Bronze®

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods Optional 337033 Downrod Kit

Downlight Replaceable. Includes (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope – Pitch Flat ceiling only **Lead Wire** 78"

cETL Listed Wet

Hanging Weight 18.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.59 on High

RPM 125 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER – FULL FUNCTION

- 3 Forward Speeds & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER – FULL FUNCTION 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.









OPTIONAL HANGER SYSTEM




Downrod Kit 337033 MWH, NI, OZ (shown), SBK

HANGING MEASUREMENTS

FLUSH MOUNT

1 EGSTT MICOTAT			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 11.00"	B: 7.25"	C: 8.75"	D: 6.50"



OPTIONAL HANGER SYSTEM

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 11.25"	C: 8.75"	D: 6.75"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5096	70	73	

AIR PERFORMANCE (OPT.)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
5754	70	91	

BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) MWH Matte White Matte FB330152 White MWH NI Brushed Nickel SBK Satin

Black FB330152

SBK

Brown

FB330152

ΟZ





Blades (3) Included

- 17° Pitch
- 44" Sweep
- Non-reversible
- ABS

Downrods Optional 337033 Downrod Kit

Downlight Replaceable. Includes (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only Lead Wire 78"

cETL Listed Wet

Hanging Weight 15.7 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 15mm, AC

Amps 0.57 on High

RPM 170 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.









OPTIONAL HANGER SYSTEM




Downrod Kit 337033 MWH. NI (shown), OZ,

HANGING MEASUREMENTS

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 11.00"	B: 7.25"	C: 8.75"	D: 6.50"



OPTIONAL HANGER SYSTEM

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.00"	B: 11.25"	C: 8.75"	D: 6.75"



AIR PERFORMANCE AIRFLOW **POWER** AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 4298 68 63

AIR PERFORMANCE (OPT.)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4705 68 77			

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB330151 MWH

















34" sola



SBK Satin

Black

INCLUDED FEATURES

Blades (3) Included

- 14° Pitch
- 54" Sweep
- Non-reversible
- ABS

Downrods Optional 337033 Downrod Kit

Downlight Replaceable. Includes (1) 17W Dimmable, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Flush Mount

Control Wall Transmitter - Full Function

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only Lead Wire 78"

cETL Listed Wet

Hanging Weight 18.2 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 172mm X 20mm, AC

Amps 0.59 on High

RPM 125 on High

Energy Star® No

INCLUDED CONTROLS



WALL TRANSMITTER -**FULL FUNCTION**

- 3 Forward Speeds & Motor Off
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 337009 (Shown)

METAL CAPS

Includes a metal fixture cap for non-light use.









OPTIONAL HANGER SYSTEM




Downrod Kit 337033 MWH, NI, OZ (shown), MWH, SBK

HANGING MEASUREMENTS

FLUSH MOUNT

T EUSTI MOUNT			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 11.00"	B: 7.25"	C: 8.75"	D: 6.50"



OPTIONAL HANGER SYSTEM

OF HOMAL HANGER STSTEM			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 15.00"	B: 11.25"	C: 8.75"	D: 6.75"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3509	65	54	

AIR PERFORMANCE (OPT.)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3831	65	65	

BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) Matte MWH White Matte FB330150 White MWH NI Brushed Nickel




Satin

Black FB330150



60" Starkk

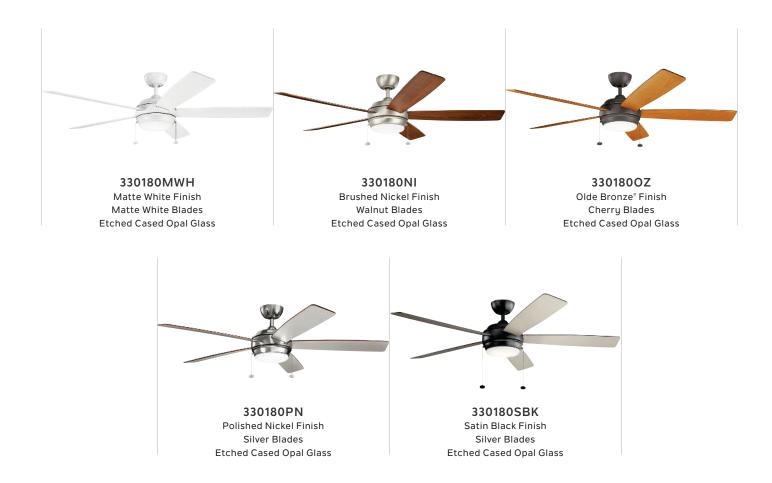

Blades (5) Included

- 14° Pitch
- 60" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 21.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 188mm X 25mm, AC

Amps 0.6 on High RPM 113 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse





65K WALL CONTROL **SYSTEM - LIMITED FUNCTION**


OPTIONAL CONTROLS

371042MUL (Shown) 371082WH

HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)	
A: 14.25"	B: 9.75"	C: 10.50"	D: 6.25"	



BLADE SPECS Blade Finish & Part Number Fan Finish (Side 1) (Reversible) Matte MWH White Matte FB330180 White MWH Medium Dark **NBR** Cherry FB330180 Cherry FB330180 Natural Brass NBR NBR NI **Silver** FB330180 NI Walnut

FB330180

NI








Brushed

Nickel

AIR PERFORMANCE



52" Starkk

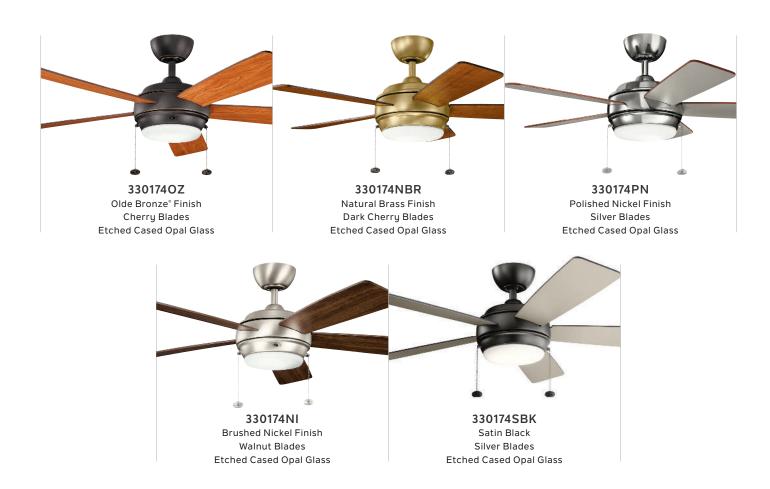

Fan Finish

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 16.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Tupe 153mm X 17mm, AC

Amps 0.46 on High

RPM 135 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL **SYSTEM - LIMITED FUNCTION** 371042MUL (Shown)

371082WH

(Side 1) (Reversible) Matte MWH White Matte FB330174 White MWH Medium Dark NBR Cherry FB330174 Cherry FB330174 NBR NBR NI **Silver** FB330174 NI Walnut Brushed FB330174 Nickel NI ΟZ Cherry FB330174 Walnut Olde FB330174 Bronze OZ PΝ **Silver** FB330174 PN Walnut Polished FB330174 Nickel PN

Black

FB330174

SBK


BLADE SPECS

Blade Finish & Part Number

HANGING MEASUREMENTS

WITH A FOIL DOWNING

WITH 4.50" DOWNROD			
Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.25"	B: 9.75"	C: 10.50"	D: 6.25"



AIR PERFORMANCE **AIRFLOW** POWER AIRFLOW Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 75 4051 54



SBK

Satin

Black





Fan Finish

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 42" Sweep
- Reversible
- Wood

Downrods 4.50" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W, 1600 Lumens LED Platform, 80 CRI, 3000K

Downlight Glass Etched Cased Opal

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 30° or 7/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 26.4 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 12mm, AC

Amps 0.39 on High RPM 215 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



65K WALL CONTROL **SYSTEM - LIMITED FUNCTION**

371042MUL (Shown) 371082WH

Matte MWH White Matte FB330171 White MWH Medium Dark NBR Cherry FB330171 Cherry FB330171 Natural Brass NBR NBR NI **Silver** FB330171 NI Walnut Brushed FB330171 Nickel NI ΟZ Cherry FB330171 Walnut Olde FB330171 Bronze® OZ PN **Silver** FB330171 PN Walnut Polished FB330171

PN

Black FB330171

SBK

Silver FB330171 SBK

BLADE SPECS

(Reversible)


Blade Finish & Part Number

(Side 1)

HANGING MEASUREMENTS

WITH 4.50" DOWNROD

Fixture Drop (from ceiling)	Blade Drop (from ceiling)	Housing (width)	Ceiling Canopy (width)
A: 14.25"	B: 9.75"	C: 10.50"	D: 6.25"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3482	47	74	



Nickel

SBK

Satin Black





330015WHWhite Finish
White Blades

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight Glass N/A

 $\textbf{Low Ceiling Adaptable} \ \textbf{Yes}, \textbf{Dual Mount}$

Included

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Damp

Hanging Weight 17.9 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.43 on High

RPM 167 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER – FULL FUNCTION 371042 (Shown) 371082 337001

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB330015 MWH
















HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 12.50"	B: 10.50"	C: 11.50"	D: 5.25"



FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 9.50"	B: 7.50"	C: 11.50"	D: 5.25"




AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4367	52	84	

AIR PERFORMANCE (FLUSH)		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3853	52	74



52" Basics Pro Premier LED

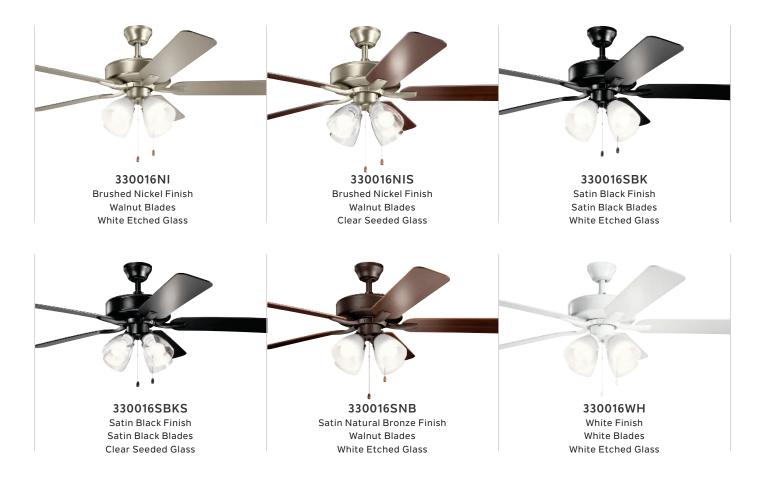

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (4) E26, 4W LED Bulbs

Downlight Glass White Etched Glass or Clear Seeded Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 18.2 lbs.

Body Material Steel

Warranty Visit Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Tupe 153mm X 15mm, AC

Amps 0.43 on High

RPM 161 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER -**FULL FUNCTION**

371042 (Shown) 371082 337001

SOCKET COVER ACCESSORY

Socket Cover available in coordinating fan finishes

COORDINATED LIGHTING


Visit Kichler.com to see the entire Winslow collection.



HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 18.25"	B: 10.50"	C: 11.50"	D: 5.25"



FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 15.25"	B: 7.50"	C: 11.50"	D: 5.25"



AIR PERFORMANCE AIRFLOW AIRFLOW **POWER** Cubic Ft. USAGE **EFFICIENCY** Per Minute Watts on High Cubic Ft. on High Per Minute (Excludes Per Watt Lights) 4200 52 81

AIR PERFORMANCE (FLUSH)		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3705	52	72

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB330016 MWH

Silver FB330016 MWH

MWH Matte White





















Silver FB330016 SBKS











Silver FB330016 WH

WH White



330017NI 330017SBK Brushed Nickel Finish Satin Black Finish Satin Black Blades Walnut Blades White Etched Glass White Etched Glass 330017WH 330017SNB Satin Natural Bronze Finish White Finish Walnut Blades White Blades White Etched Glass White Etched Glass

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Includes (3) B10, 4W LED Bulbs

Downlight Glass White Etched Glass

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 15.1 lbs.

Body Material Steel

Warranty Visit Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.43 on High

RPM 161 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS




COOLTOUCH™ TRANSMITTER -**FULL FUNCTION** 371042 (Shown)

371082 337001

COORDINATED LIGHTING

Visit Kichler.com to see the entire Abbotswell™ collection.



BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB330017 MWH

Silver FB330017 MWH

MWH Matte White






















Silver FB330017 WH

WH White

HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 17.50"	B: 10.50"	C: 11.50"	D: 5.25"



FLUSH MOUNT


Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 14.50"	B: 7.50"	C: 11.50"	D: 5.25"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4200	52	81	

AIR PERFORMANCE (FLUSH)		
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt
3705	52	72



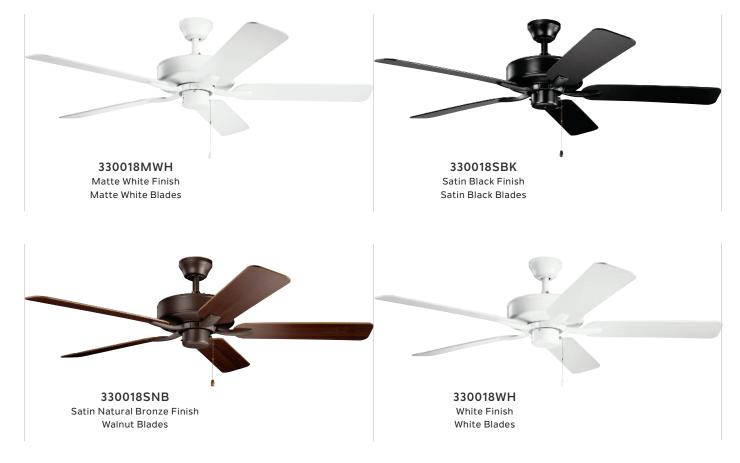

INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods 4" Downrod with 1" (O.D.)

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control Pull Chain

FAN FEATURES

Mounting Slope – Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Indoor

Hanging Weight 13.1 lbs.

Body Material Steel

Warranty Visit Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.43 on High RPM 161 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3-Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



COOLTOUCH™ TRANSMITTER – FULL FUNCTION 371042 (Shown) 371082 337001

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB330018 MWH

Silver FB330018 MWH MWH Matte White




















White FB330018 WH Silver FB330018 WH WH White

HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 12.50"	B: 10.50"	C: 11.50"	D: 5.25"




FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 9.25"	B: 7.50"	C: 11.50"	D: 5.25"

AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
4200	52	81	

AIR PERFORMANCE (FLUSH)				
AIRFLOW Cubic Ft.	POWER USAGE	AIRFLOW EFFICIENCY		
Per Minute on High	er Minute Watts on High Cubic Ft.			
	Lights)	Per Watt		
3705	52	72		



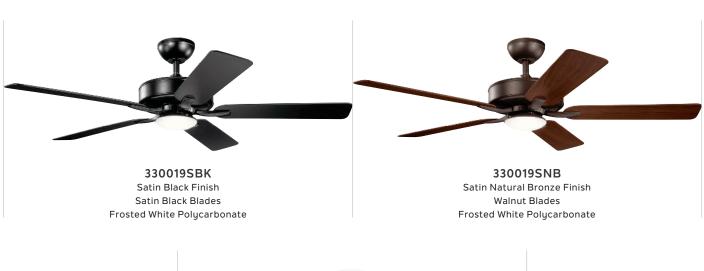



INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods 4" Downrod with 1" (O.D.)

Downlight Replaceable. Integrated (1) 17W Dimmable, 1600 Lumens LED Platform, 90 CRI, 3000K

Downlight Glass Frosted White Polycarbonate

Optional Downlight N/A

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Dual Mount Included

Control 3 Speed Basic Handheld

FAN FEATURES

Mounting Slope - Pitch 22° or 4/12

Lead Wire 78"

cUL Listed Damp

Hanging Weight 17.6 lbs.

Body Material Steel

Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.43 on High RPM 167 on High

Energy Star® No

INCLUDED CONTROLS



3-SPEED BASIC HANDHELD

- 3 Forward Speeds & Motor Off
- Manual Reverse
- Lights On/Off with Full-Range Dimming

OPTIONAL CONTROLS



COOLTOUCH[™]
TRANSMITTER –
FULL FUNCTION
370039 (Shown)

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish


















HANGING MEASUREMENTS

WITH 4" DOWNROD

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 12.50"	B: 10.50"	C: 11.50"	D: 5.90"



FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 9.50"	B: 7.50"	C: 11.50"	D: 5.25"



AIR PERFORMANCE					
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt			
4367	"				

AIR PERFORMANCE (FLUSH)			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes	AIRFLOW EFFICIENCY Cubic Ft. Per Minute	
3853	Lights)	Per Watt 74	



52" Basics Pro Legacy Patio



INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Non-reversible
- ABS

Downrods N/A

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable No

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only

Lead Wire 12"

cUL Listed Damp

Hanging Weight 13.2 lbs.

Body Material Steel

Warranty Visit Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.57 on High

RPM 157 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



371042 (Shown) 371082 337001

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

Matte White FB330021 MWH

MWH Matte White














HANGING MEASUREMENTS

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 8.00"	B: 6.00"	C: 11.50"	D: 11.50"



AIR PERFORMANCE **AIRFLOW** AIRFLOW **POWER** Cubic Ft. USAGE **EFFICIENCY** Per Minute Cubic Ft. Watts on High on High Per Minute (Excludes Per Watt Lights) 3676 57 64







INCLUDED FEATURES

Blades (5) Included

- 12° Pitch
- 52" Sweep
- Reversible
- Wood

Downrods N/A

Downlight N/A

Downlight Glass N/A

Optional Downlight See pages 266-270

Uplight N/A

Uplight Glass N/A

Low Ceiling Adaptable Yes, Low Ceiling

Adaptable

Control Pull Chain

FAN FEATURES

Mounting Slope - Pitch Flat ceiling only

Lead Wire 12"

cUL Listed Indoor

Hanging Weight 12.8 lbs.

Body Material Steel

Warranty Visit Kichler.com/Warranty

MOTOR FEATURES

Motor Size/Type 153mm X 15mm, AC

Amps 0.57 on High RPM 152 on High

Energy Star® No

INCLUDED CONTROLS

PULL CHAIN

- 3 Speeds
- 3 Forward & Reverse
- Manual Reverse



OPTIONAL CONTROLS



371042 (Shown) 371082 337001

BLADE SPECS

Blade Finish & Part Number (Side 1) (Reversible)

Fan Finish

























White FB330020 WH






HANGING MEASUREMENTS

FLUSH MOUNT

Fixture Drop	Blade Drop	Housing	Ceiling Canopy
(from ceiling)	(from ceiling)	(width)	(width)
A: 8.00"	B: 6.00"	C: 11.50"	D: 11.50"



AIR PERFORMANCE			
AIRFLOW Cubic Ft. Per Minute on High	POWER USAGE Watts on High (Excludes Lights)	AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt	
3536	57	62	







Accessories

Want to enhance your ceiling fan? Simple tweaks can make a big impact. To help, we offer a variety of ceiling fan accessories such as wall and remote controls, light kits, blades, and shades to help change the look of your ceiling fan.







AC Control Systems

Includes transmitter and receiver.



371082 WH (shown) CoolTouch™ Handheld Control System -Limited Function

- · Designed for AC motor fans • 65K Code
- · 3 Forward Speeds, Motor Off
- Manual Reverse
- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas. Wireless radio frequency operational radius of
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries. Transmitter is Dry-rated for indoor use only. CoolTouch Limited Function also available in Almond (ALM) and Ivory (IV) faceplate colors - 370010.



Available Transmitter 371062 MULTR

65K Wall Transmitter – Limited Function Almond (ALM), Ivory (IV) or White (WH)



371085 ALM, IV, WH (SHOWN) CoolTouch™ Handheld Control System -

Full Function

- AC Motor Fans
- · 65K Code
- 3 Forward Speeds, Reverse, and Motor Off
- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas. Wireless radio frequency operational radius of
- · Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries. Transmitter is Dry-rated for indoor use only. CoolTouch Limited Function also available in Almond (ALM) and Ivory (IV) faceplate colors - 370010.



Available Transmitter





371042MUL Wall Control System -Limited Function



- 65K Code
- 3 Forward Speeds, Motor Off
- Manual Reverse
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware. Hard-wired wall control. Transmitter is Dry-rated for indoor use only.



Available Transmitter 370005 65K CoolTouch™ Transmitter -Limited Function



371045MUL Wall Control System -

Full Function





- 3 Forward Speeds, Reverse, and Motor Off
- · Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware. Hard-wired wall control. Transmitter is Dry-rated for indoor use only.



Available Transmitter 370006 65K CoolTouch™ Transmitter -Full Function



337001WH Handheld Control System -

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Motor Off
- Manual Reverse
- Lights on/off with full-range dimming. On/off only for fluorescent. Not recommended for LED light kits.
- Transmitter is Dry-rated for indoor use only.
- Includes transmitter and canopy-mounted receiver with 16 possible frequencies. Also includes wall bracket and mounting hardware, plus 9-volt battery.







371065 MULTR

65K Wall Transmitter - Full Function Almond (ALM), Ivory (IV) or White (WH)





AC Controls - Transmitter only



370038MULTR Wall Transmitter -**Full Function**

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- · Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- · Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.



CoolTouch™ Transmitter -Full Function*

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing sustem. *Wireless operational radius of 30' or less.
- · Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.

Accessories 370010 ALM (shown) 370010 IV





370039MULTR Wall Transmitter -Limited Function

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing sustem. *Wireless operational radius of 30' or less.
- · Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.



CoolTouch™ Transmitter -Limited Function*

- Designed for AC motor fans
- 16 Frequency Code
- 3 Forward Speeds, Reverse, and Motor Off
- · Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or
- · Includes wall bracket, mounting hardware and White faceplate.



AC Controls - Conversion Kit



	CoolTouch [™] Reversible Conversion Handheld Control System – Full Function			
Item Number	3R200	3F	2400	3W500
Finishes	BSS, DBK, MWH, NBR, NI, OBB, SNW, TZ, WH	AP, BSS, MWH, NBR, NI, (AP, BSS, MWH, NBR, NI, OBB, OZ, SGD, SNW, TZ, WH	
For use with Fans:	300117 52" Canfield [™] 330247 52" Terra	300107 44" Canfield [™] 339011 52" Sutter Place	339017 42" Stratmoor 339022 52" Stratmoor	310192 52" Canfield™ Patio ®
Control Function	• 16 Frequency Code • 3 Forward Speeds, Reverse, and Motor Off			
Downlight Control	On/off with full-range dimming and intelligent return for both			
Receiver	Wireless operational radius of 30' or less			
Compatibility		Replaces any single-wall switch or mounts on any flat surface		
Notes	Includes wall bracket and mounting hardware, plus replaceable, long-life lithium batteries. Also includes wall pocket, transmitter, canopy-mounted receiver and reversing wiring harness. Designed exclusively for and intended for use with listed Kichler® brand ceiling fans ONLY.			
Accessories		CoolTouch™ Wallplate - ny AC or DC CoolTouch™	Dual Gang	/I, IV, WH (shown) CoolTouch™ Wallplate – any AC or DC CoolTouch™ item

AC Fan Hardwire Wall Controls



Dual-Slide Control – Fan/Light **337010** ALM, IV, **WH** (shown)

- Designed for AC Motor Fans
- Max 1.25 Amp
- Fan speed and light control
- Controls 1 fan and light
- Full-range dimming light control
- Includes faceplate. Requires 3 wire + ground installation. For use with most AC ceiling fans.



4-Speed Slide Control – Fan only 337012 ALM (shown), IV, WH

- Designed for AC Motor Fans
- Max 1.25 Amp
- 4-Speed fan control
- Controls 1 fan
- Includes faceplate. Can be used in dual gang box alongside our Dimmer Slide Control 337011.
 For use with most AC ceiling fans.



Dimmer Slide Control – Light only **337011** ALM, **IV** (shown), WH

- Designed for AC Motor Fans
- Max 600W
- Full-range light dimmer
- Controls 1 fan light or light fixture
- Full-range dimming light control
- Includes faceplate. Can be used in dual gang box alongside our 4-Speed Slide Control 337012.
 For use with most AC ceiling fans.



4-Speed Wall Control – Rotary 370040

- Designed for AC Motor Fans
- Max 10 Amp
- Controls multiple fans on one circuit
- Brushed Aluminum faceplate with black control knob. For use with most AC ceiling fans.



4-Speed Wall Control – Rotary 370032MUL

- Designed for AC Motor Fans
- Max 5 Amp
- Controls 2 or 3 fans (3 max.)
- Includes Almond, Ivory, and White faceplates and control knobs. For use with most AC ceiling fans.

DC Control Systems



6-Speed DC Wall Transmitter – Full Function **370036** ALMTR, IVTR, **WHTR** (shown)

- DC Motor Fans only
- 6 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Sold separately
- Includes White faceplate and mounting hardware. No more than two fans on one circuit.



6-Speed DC CoolTouch™ Transmitter – Full Function 371075

- DC Motor Fans only
- 6 Forward Speeds, Reverse, and Motor Off
- · Lights on/off with full-range dimming
- Sold separately
- Includes White faceplate and mounting hardware. No more than two fans on one circuit.

Accessories 370010 ALM (shown) 370010 IV



Hanger System Accessories







	60° Slope Adapter	Flush Mount Kits	Downrod Coupler
Item Number and Finishes	337005 + Finish code	337008 + Finish code	337007 + Finish code
Features	 Adapts to sloped or vaulted ceilings from 0° to 60° Accepts our CoolTouch™ Receiver Unit for remote controlled fans Includes "Stabilized" Mounting System with tension feature Safety features prevent fan from "lifting" off mounting system Heavy-duty design features 2 safety pins and 1 screw set for maximum safety 	For use with any fan noted as "Low Ceiling Adaptable" Accepts control receiver for remote controlled fans	Decorative Coupler for 1" (O.D.) extension downrods to achieve desired length
Dimensions	6.00" Dia. x 4.00" H	6.00" Dia. x 2.75" H	2.00" Dia. x 4.00" H
Notes	Designed for indoor or outdoor use. Outdoor finishes are powder coated or painted with a galvanized undercoating Designed for use with 1" O.D. downrods ONLY Available in all Kichler® fan finishes Downrod sold separately U.S. Patent Pending	Overall fan height reduced by approximate length of downrod removed For use with: 60" Ashbyrn, 52" Bentzen, 52" Bentzen Select LED, 44" Canfield, 52" Canfield, 52" Canfield Patio, 52" Canfield Pro LED, 52" Canfield Select LED, 60" Canfield XL, 60" Canfield XL Patio, 52" Hendrik, 52" Kittery Point, 52" Monarch II, 52" Monarch II Patio, 52" Monarch II Select, 52" Terra, 52" Terra Select, 52" Tess	For use with dual-threaded downrods only

FINISH CODES

ANS	Antique Satin Silver	MCH	Midnight Chrome	SNB	Satin Natural Bronze
AP	Antique Pewter	MDW	Mediterranean Walnut™	SNW	Satin Natural White
AVI	Anvil Iron	MWH	Matte White	TZ	Tannery Bronze™
AW	Aged White	NBR	Natural Brass	TZG	Tannery Bronze [™] with Gold
BAB	Burnished Antique Brass	NI	Brushed Nickel	TZP	Tannery Bronze™ Powder Coat
BKZ	Berkshire Bronze™	OBB	Oil Brushed Bronze™	WCP	Weathered Copper
BSS	Brushed Stainless Steel	OLZ	Oiled Bronze	WH	White
СМО	Coffee Mocha	ΟZ	Olde Bronze®	WN	Walnut
CZ	Carre Bronze	PN	Polished Nickel	WSP	Weathered Steel
DBK	Distressed Black	SGD	Sterling Gold	WZC	Weathered Zinc
GST	Galvanized Steel	SBK	Satin Black		

AUB fan finish Includes DBK (Distressed Black) downrod BAP fan finish Includes AP (Antique Pewter) downrod

All Kichler° ceiling fans come standard with our universal hanging system. This basic system allows for mounting on ceilings with up to a 30° slope. For ceilings in excess of 30° of slope, please utilize our 60° Slope Adapter (337005).







6

60°

Outdoor Light Kits

LED Industrial Mesh Light Kit

380952 DBK (shown), MWH, OZ, TZP, WCP, WSP, WZC

	,	1131,1120
Glass	Etched Cased Opal	
Downlight	• 17W Dimmable Integrated LED Platform • 1,600 lm • 80 CRI • 3,000K	
Dimensions	12.75" Diameter 6.25" Height	
ETL Listed	Wet	(LED) (W)

LED Bluetooth® Audio Light Kit

380950 MWH, NI (shown), SBK, SNB

Glass	Etched Cased Opal	
Downlight	• 17W Dimmable Integrated LED Platform • 1,600 lm • 80 CRI • 3,000K	
Dimensions	13.00" Diameter 5.25" Height	
ETL Listed	Damp	
Notes	Works on any fan that accepts a light kit. Dual speakers: 7W, 84dB each.	(III) (W (8)

LED Yorke Ceiling Fan Light Kit

380915 DBK, MWH, SBK (shown), TZP, WCP, WH, WSP

Glass	Clear Seeded	
Downlight	• Includes (1) E26, 7W LED, 2,700K	
Dimensions	8.50" Diameter 9.00" Height	
cUL Listed	Wet	LED



LED Bridge Point Ceiling Fan Light Kit

380945 DBK, OZ (shown), WCP, WSP, WZC

Glass	Clear Seeded	In the second
Downlight	• Includes (1) E26, 7W LED, 2,700K	
Dimensions	12.50" Diameter 8.25" Height	
cUL Listed	Wet	(ED) (W)

LED Ahrendale™ Ceiling Fan Light Kit

380949 AUB, AVI (shown), WZC

Glass	Etched Cased Opal	
Downlight	• 17W Dimmable Integrated LED Platform • 1,600 lm • 80 CRI • 3,000K	
Dimensions	11.75" Diameter 5.25" Height	
ETL Listed	Wet	(LED W



Schoolhouse Light Kit

380903 ANS, CMO, MWH, NI, **SBK** (shown), SNB, SNW, TZP, WCP, WH, WSP

Glass	Cased Opal	
Downlight	• Includes (1) E26, 13W CFL, 4052	
Dimensions	8.00" Diameter 6.75" Height	
cUL Listed	Wet	W

Outdoor Light Kits

LED Low-Profile Light Kit 380930 MUL (WH shown) **Etched Cased** Glass Opal • 17W Dimmable Integrated LED Platform Downlight • 1,600 lm • 80 CRI • 3,000K 11.50" Diameter Dimensions 4.25" Height cUL Listed Wet Includes MWH, Notes NI and SNB w W finishes.

LED Low-Profile Light Kit 380931 MUL (SNB shown) Glass Umber Etched • 17W Dimmable Integrated LED Platform Downlight • 1,600 lm • 80 CRI • 3,000K 11.50" Diameter Dimensions 4.25" Height cUL Listed Wet Includes MWH, Notes NI and SNB (LED) W finishes.

FINISH CODES

ANS	Antique Satin Silver	ОВВ	Oil Brushed Bronze [™]	WH	White
AP	Antique Pewter	OZ	Olde Bronze®	WSP	Weathered Steel
AUB	Auburn Stained	SBK	Satin Black	WZC	Weathered Zinc
AVI	Anvil Iron	SGD	Sterling Gold		
СМО	Coffee Mocha	SNB	Satin Natural Bronze		
DBK	Distressed Black	SNW	Satin Natural White		
MDW	Mediterranean Walnut	TZ	Tannery Bronze [™]		
MWH	Matte White	TZP	Tannery Bronze [™] Powder Coat		
NI	Brushed Nickel	WCP	Weathered Copper		

Outdoor Light Kits

CFL Slim-Profile Light Kit

380911 ANS, CMO, DBK, MWH (shown), SNW, WH

Glass	Cased Opal
Downlight	• Includes (1) E26, 23W CFL Lamp, 4052
Dimensions	11.00" Diameter 4.50" Height
cUL Listed	Wet
Notes	ABS fixture. For use with: Arkwet™, Canfield™, Enduro™, Kevlar™, Lehr™, and Lehr™ II Fans

LED Light Kit

338629 MWH, WCP, WSP (shown)

Glass	Etched Cased Opal	
Downlight	• 17W Dimmable Integrated LED Platform • 1,600 lm • 80 CRI • 3,000K	
Dimensions	7.50" Diameter 3.00" Height	***************************************
cUL Listed	Wet	
Notes	ABS fixture. For use with: Arkwet [™] , Canfield [™] , Enduro [™] , Kevlar [™] , Lehr [™] , and Lehr [™] II Fans	(ED) (W)

Outdoor CFL Light Kit

380912 ANS, **CMO** (shown), MWH, SBK, TZP, WCP, WH, WSP

Glass	Cased Opal	
Downlight	• Includes (2) GU24, 13W CFL Lamps, 4043	
Dimensions	11.00" Diameter 4.50" Height	
cUL Listed	Wet	•
Notes		W

Outdoor CFL Light Kit

380010 ANS, CMO, **MWH** (shown), SBK, TZP, WCP, WH, WSP

Glass	Cased Opal	*
Downlight	• Includes (2) E26, 13W CFL Lamps, 4052	
Dimensions	10.25" Diameter 5.50" Height	
cUL Listed	Wet	(d)
Notes		W

Indoor Light Kits

LED Low-Profile Light Kit

380030 MUL (shown)

Glass	Etched Cased Opal
Downlight	• 17W Dimmable Integrated LED Platform • 1,600 lm • 80 CRI • 3,000K
Dimensions	10.00" Diameter 4.75" Height
cUL Listed	Indoor
Notes	Includes MWH, NI and SNB finishes.

LED Low-Profile Light Kit

380032 MUL (shown)

		No. of the last of	21
cUL Listed	Indoor	note in	
Dimensions	10.00" Diameter 4.75" Height		
Downlight	• 17W Dimmable Integrated LED Platform • 1,600 lm • 80 CRI • 3,000K		
Glass	Umber Etched		

LED Low-Profile Light Kit

380031 MUL (WH shown)

LED Low-Profile Light Kit

380033 MUL (SNB shown)

Notes	Includes MWH, NI and SNB finishes.	(LED)	
cUL Listed	Indoor		
Dimensions	13.00" Diameter 4.75" Height		
Downlight	• 17W Dimmable Integrated LED Platform • 1,600 lm • 80 CRI • 3,000K		
Glass	Umber Etched		

LED Low-Profile Light Kit

338200 AP (shown), DBK, MWH, NBR, NI, OBB, SGD, SNB, SNW, TZ, WH

	022,002,01	10, 51111, 12, 1111
Glass	Etched Cased Opal	
Downlight	• 17W Dimmable Integrated LED Platform • 1,600 lm • 80 CRI • 3,000K	
Dimensions	11.50" Diameter 4.25" Height	
ETL Listed	Indoor	
Notes		LED

Indoor Light Kits

		LED 3-Light Bowl Light Kit					
Item Number		380015 MUL (WH shown)	380018 MUL (WH shown)	380016 MUL (OBB shown)	380017 MUL (OBB shown)		
Downlight	• Includes (3), B10, 4W LED Lamps						
Dimensions	11.00" Diameter 5.75" Height						
cUL Listed	Indoor						
Glass		White Alabaster Swirl	Opal Etched	Citrine	Umber Etched		
Notes	Includes BSS, DBK, NI, OBB, SNW, TZ and WH cap finishes.						







Indoor Light Fitters

Designed to accommodate 2-1/4" fitter glass (sold separately). See the next page for glass options.

		4-Light Medium Base Fitter	4-Light Bent Arm Fitter		
Item Number		350210 AP, BSS, DBK, MWH, NI, OBB, OZ (SHOWN), SNB, TZ, WH	350015 AP, BSS, DBK, MWH, NI, OBB, OZ, SBK (SHOWN), SNB, TZ, WH		
Downlight	• Includes (4) E26, 13W CFL, Non- Dimmable Lamps				
Socket	Threaded Nord Sockets				
cUL Listed	Indoor				
Dimensions		6.75" Width 3.75" Height	12.75" Width 3.50" Height		
Notes	Includes retainer	nut tool for easy assembly of glass shades.			

		3-Light Decorative Fitter Light Kit
Item Number		380041 DBK (shown), NI, OBB, SBK, TZ, WH, OZ, MWH
Downlight	• Includes (3) B10, 4W LED Lamps, 4053CLR	
Dimensions	10.25" Diameter 6.75" Height	
cUL Listed	Indoor	
Glass	None	

2-1/4" Fitter Glass



	2-1/4" Fitter Glass				
Item Number	340126	340127	340115	340116	340135
Glass	Umber Etched	Satin Etched	Citrine	Etched Seedy	Clear Seeded
Dimensions	5.25" Width 4.75" Height	5.25" Width 4.75" Height	5.50" Width 5.00" Height	5.50" Width 5.00" Height	5.25" Width 4.75" Height



	2-1/4" Fitter Glass				
Item Number	340010	340011	340012	340114	340121
Glass	Satin Etched Cased Opal	White Vetro Mica	Cased White Water	Frosted Ribbed	White Alabaster
Dimensions	5.25" Width 5.00" Height	5.25" Width 5.00" Height	5.25" Width 5.00" Height	4.50" Width 5.00" Height	5.00" Width 5.25" Height



	2-1/4" Fitter Glass				
Item Number	340129*	340130*	340131*	340128	340133
Glass	Pine Bark	White Linen	Mocha Wisp	White Alabaster	Clear/Etched
Dimensions	4.25" Width 4.50" Height	4.25" Width 4.50" Height	4.25" Width 4.50" Height	5.25" Width 4.75" Height	4.75" Width 5.25" Height

Accessory Blades

For use exclusively with Canfield™ 52"/54"/56" (320500) and

- Canfield™ XL Patio 60" (310193) Outdoor/Indoor ceiling fans.

 W Select blades are wet-rated, for installation in open porches and patios, or anywhere that is exposed directly to water **spray or rain.** All are constructed from durable ABS plastic to resist weathering, even in the harshest elements.
 - Optional hand-carved, solid wood blades feature a moisture-resistant coating, appropriate for covered patios, verandas and other areas protected from direct exposure to the elements.







	Accessory Blades – Wet				
Item Number	370021	370022	370034		
Finish	White Washed Oak	Dark Weathered	Brown Rattan		
Notes	W All-Weather ABS Blades 52" Blade Sweep	M All-Weather ABS Blades 52" Blade Sweep	All-Weather ABS Blades 54" Blade Sweep		







	Accessory Blades – Wet				
Item Number	370035	371010	371011		
Finish	Ivory with Walnut Highlights	Antique Satin Silver	Coffee Mocha		
Notes	W All-Weather ABS Blades 54" Blade Sweep	W All-Weather ABS Blades 52" Blade Sweep	W All-Weather ABS Blades 52" Blade Sweep		







	Accessory Blades – Wet				
Item Number	371012	371013	371015		
Finish	Satin Black	Satin Natural White	Light Walnut/Dark Walnut		
Notes	W All-Weather ABS Blades 52" Blade Sweep	W All-Weather ABS Blades 52" Blade Sweep	W All-Weather ABS Blades, Reversible, 52" Blade Sweep		







	Accessory Blades – Wet				
Item Number	371017	371019	371024		
Finish	Walnut Shadowed	Aged White	Satin Natural White		
Notes	M All-Weather ABS Blades 52" Blade Sweep	W All-Weather ABS Blades 52" Blade Sweep	W All-Weather ABS Blades 52" Blade Sweep		

Accessory Blades





	Accessory Blades – Damp			
Item Number	371021	371101		
Finish	Ivory with Walnut Highlights	American Walnut Stain		
Notes	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 56" Blade Sweep		

For use exclusively with Canfield 52" (300117) and Canfield Pro LED 52" (330013) ceiling fans.







	Indoor 52" Accessory Blades – Solid Wood				
Item Number	371030	371031	371038		
Finish	Weathered White Walnut	Shadowed Walnut	Weathered Dark Walnut		
Notes	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 52" Blade Sweep		







	Indoor 52" Accessory Blades – Solid Wood				
Item Number	370050	371070	371040		
Finish	Walnut Shadowed	Distressed White	Silver/Black		
Notes	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades 52" Blade Sweep	Solid Wood Blades, Reversible 52" Blade Sweep		

For use exclusively with 70" Monarch[™] (300206) and Canfield[™] XL (300188) ceiling fans.

	Indoor 70" Accessory Blades – Solid Wood				
Item Number	371050				
Finish	Weathered White Walnut				
Notes	Solid Wood Blades 70" Blade Sweep				

Dual-Threaded Downrods

Extension downrods 1" (O.D.). Not for use with Kichler® Basics fans.

	ng Height	9 ft.	10 ft.	11 ft.	12 ft.	13 ft.	14 ft.	15 ft.
Sugg	ested Downrod Length	12"	18"	24"	36"	48"	60"	72"
	SHES							
ANS		360000	360001	360002	360003	360004	360005	36000
	ue Satin Silver	ANS	ANS	ANS	ANS	ANS	ANS	ANS
AP Aptigu	ue Pewter	360000 AP	360001 AP	360002 AP	360003 AP	360004 AP	360005 AP	36000 AP
Aritiqu	ue Fewtei	360000	360001	360002	360003	360004	360005	3600
Anvill	ron	AVI	AVI	AVI	AVI	AVI	AVI	AVI
AW		360000	360001	360002	360003	360004	360005	3600
Aged	White	AW	AW	AW	AW	AW	AW	AW
BAB		360000	360001	360002	360003	360004	360005	3600
	shed Antique Brass	BAB	BAB	BAB	BAB	BAB	BAB	BAI
BKZ Borks	hire Bronze™	360000 BKZ	360001	360002	360003	360004	360005	3600
Berks BSS	nire Bronze	360000	BKZ 360001	BKZ 360002	BKZ 360003	BKZ 360004	BKZ 360005	3600
	ned Stainless Steel	BSS	BSS	BSS	BSS	BSS	BSS	BS
CMO	ied Stairness Steel	360000	360001	360002	360003	360004	360005	3600
	e Mocha	СМО	СМО	СМО	СМО	СМО	СМО	СМ
CZ		360000	360001	360002	360003	360004	360005	3600
	Bronze	CZ	CZ	CZ	CZ	CZ	CZ	CZ
DBK		360000	360001	360002	360003	360004	360005	3600
	essed Black	DBK	DBK	DBK	DBK	DBK	DBK	DB
GST Calva	nimed Chaol	360000	360001	360002	360003	360004	360005	3600
MCH	nized Steel	GST 360000	GST 360001	GST 360002	GST 360003	GST 360004	GST 360005	GS 3600
_	ght Chrome	MCH	MCH	MCH	MCH	MCH	MCH	MC
MDW	J	360000	360001	360002	360003	360004	360005	3600
	erranean Walnut™	MDW	MDW	MDW	MDW	MDW	MDW	MD
MWH		360000	360001	360002	360003	360004	360005	3600
	e White	MWH	MWH	MWH	MWH	MWH	MWH	MW
NBR	. 5	360000	360001	360002	360003	360004	360005	3600
	al Brass	NBR	NBR	NBR	NBR	NBR	NBR	NB
NI Pruch	ned Nickel	360000 NI	360001 NI	360002 NI	360003 NI	360004 NI	360005 NI	3600 NI
OBB	ied Nickei	360000	360001	360002	360003	360004	360005	3600
	ushed Bronze™	OBB	OBB	OBB	OBB	OBB	OBB	OB
OLZ		360000	360001	360002	360003	360004	360005	3600
Oiled	Bronze	OLZ	OLZ	OLZ	OLZ	OLZ	OLZ	OL
OZ		360000	360001	360002	360003	360004	360005	3600
	Bronze [®]	OZ	OZ	OZ	OZ	OZ	OZ	07
PN	INC. I	360000	360001	360002	360003	360004	360005	3600
	ned Nickel	PN 360000	PN 360001	PN 360002	PN 360003	PN 360004	PN 360005	2600 PN
SBK Satin	Rlack	SBK	SBK	SBK	SBK	SBK	SBK	3600 SBI
SGD	Bidek	360000	360001	360002	360003	360004	360005	3600
	ng Gold	SGD	SGD	SGD	SGD	SGD	SGD	SG
SNB		360000	360001	360002	360003	360004	360005	3600
Satin	Natural Bronze	SNB	SNB	SNB	SNB	SNB	SNB	SN
SNW		360000	360001	360002	360003	360004	360005	3600
	Natural White	SNW	SNW	SNW	SNW	SNW	SNW	SN
TZ	oru Prop zo™	360000	360001	360002	360003	360004	360005	3600
TZG	ery Bronze [™]	TZ 360000	TZ 360001	TZ 360002	TZ 360003	TZ 360004	TZ 360005	TZ 3600
MATERIAL DE	ery Bronze™ with Gold	TZP	TZP	TZP	TZP	TZP	TZP	TZI
TZP	. 3	360000	360001	360002	360003	360004	360005	3600
	ery Bronze™ Powder Coat	TZP	TZP	TZP	TZP	TZP	TZP	TZI
WCP		360000	360001	360002	360003	360004	360005	3600
	nered Copper	WCP	WCP	WCP	WCP	WCP	WCP	WC
WH		360000	360001	360002	360003	360004	360005	3600
White		WH	WH	WH	WH	WH	WH	WH
WN	.+	360000	360001	360002	360003	360004	360005	3600
Walnu WSP	IL .	WN 360000	WN 360001	WN 360002	WN 360003	WN 360004	WN 360005	WN 3600
SECRETARIA DE LA CONTRACTORIO DE	nered Steel	WSP	WSP	WSP	WSP	WSP	WSP	WS
WZC		360000	360001	360002	360003	360004	360005	3600
TOTAL STREET	nered Zinc	WZC	WZC	WZC	WZC	WZC	WZC	WZ



Light Bulb Reference

Incandescent and Compact Fluorescent Light Bulbs



Product ID	Incandescent Light Bulb Description	
4062CLR	40W E12, B8 Clear Replacement Lamp	
4063CLR 4064CLR	40W E12, B10 Clear Replacement Lamp 60W E12, B10 Clear Replacement Lamp	
4069CLR 4070CLR 4060CLR	15W E12, C7 Clear Replacement Lamp 10W E12, C7 Clear Replacement Lamp 7W E12, C7 Clear Replacement Lamp	
4058CLR	40W E12, Antique Decorative Lamp	

Product ID	Fluorescent Light Bulb Description	on
4055	22W T9 Circline G10q Base Replacement Lamp	
4056	22W G10q Replacement Ballast	
4043	13W GU24 Replacement Ballast	
4051	18W GU24 Squat Replacement Ballast	
4052	13W E26 Replacement Ballast	

Product ID	Halogen Light Bulb Description	
5925CLR	100W J Type Halogen Replacement Lamp	
5920FST 5910CLR 5902CLR 5903CLR	50W E11, Halogen T3 Replacement Lamp 75W E11, Halogen T3 Replacement Lamp 50W GU10, Halogen T3 Replacement Lamp 100W E11, Halogen T3 Replacement Lamp	
5907FST 5919FST 5905FST	40W E12, Krypton T3 Replacement Lamp 50W E12, Krypton T3 Replacement Lamp 60W E12, Krypton T3 Replacement Lamp	

Product ID	LED Light Bulb Description
4061FST	9W E26, LED Replacement Lamp
4053CLR	4W B10, LED Replacement Lamp

Equivalent Light Output

To determine which qualified CFL light bulbs will provide the same amount of light as your current incandescent light bulbs, consult the following chart:

Incandescent Light Bulbs Watts (W)	Incandescent Minimum Light Bulbs Lumens (Im)	Common CFL Light Bulbs Watts (W)		
40W	450 lm	9W - 13W		
60W	800 lm	13W - 15W		
75W	1,100 lm	18W - 25W		
100W	1,600 lm	23W - 30W		
150W	2,600 lm	30W - 52W		

- Lamps are included with all light kits.
- Wattages stated are the maximum recommended; however, you may use lower wattage lamps to suit your lighting needs.
- All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S. and Canada.



Fan Finishes Swatch Guide



Symbol Guide & Notes

SYMBOL GUIDE



DC MOTOR

CEILING FANS

The ultimate in energyefficient operation



ENERGY STAR®

CEILING FANS

The trusted, governmentbacked symbol for energyefficient products



LED LIGHT KIT

CEILING FANS

Feature a long life, light source that is extremely energy efficient



DAMP-RATED

CEILING FANS Engineered for high-humidity areas



WET-RATED

CEILING FANS

For open or direct exposure to sun, rain or water spray



DRY-RATED

CEILING FANS

Rated for indoor use only and are NOT intended for damp or wet locations



Federal Communications Commission devices designated with this logo comply with part 15 of the FCC Rules

NOTES

- · Bulbs not included unless otherwise noted.
- · Wattages stated are the maximum recommended; however, you may use lower wattage lamps to suit your lighting needs. Some recommended lamps are not available in the maximum allowable wattage.
- · All electrical products are rated as 120volt, AC unless otherwise noted.
- · All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S. and Canada except where noted.
- All products featured in the outdoor section are certified and listed to UL/ CSA/ETL standards for wet location except where noted.
- Many long-life tungsten halogen capsule lamps are now available as alternates to conventional incandescent light bulbs. The halogen capsule lamps may be used to replace any lamp of a higher wattage, but not to exceed the existing specified maximum wattage, i.e., 72W may replace a 75W.
- Finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, airborne pollutants and other forms of weathering.
- To serve you better, Kichler reserves the right to make improvements to the products in this catalog. Therefore, some products may change during the life of the catalog and the product information contained in this catalog may also have changed.
- Kichler® lighting products are not produced or associated with any Native American Indians, nor are they a Native American product or the product of a particular Indian, Indian tribe or Indian arts and crafts organization as defined by 25 U.S.C. §305 et. seq.

CONSUMER NOTICE

Federal Legislation to phase out 100W incandescent bulbs started January 2012.

The federal government enacted the Energy Independence and Security Act of 2007 in December 2007, requiring all general-purpose light bulbs that produce 310-2600 lumens of light be 30% more energy efficient (similar to current halogen lamps) than current incandescent bulbs bu 2014. The efficiency standards started with 100W bulbs in January 2012 and will end with 40W bulbs in January 2014.

Light bulbs outside of this range are exempt from the restrictions (historically, less than 40W or more than 150W). Also exempt are several classes of specialty lights, including appliance lamps, rough service bulbs, 3-way, colored lamps, and plant lights.

By 2020, a second tier of restrictions will become effective; which requires all general-purpose bulbs to produce at least 45 lumens per watt (similar to current CFLs). Exempt from the Act are reflector flood, 3-way, candelabra, colored and other specialty bulbs.

Many governments worldwide have passed measures to prohibit the sale of incandescent light bulbs for general lighting. The aim is to encourage use of more energy-efficient lighting alternatives, such as compact fluorescent lamps (CFLs) and LED lamps.

References: www.energy.senate.gov

We go to great lengths to assure the metal, glass finishes and blades shown in the catalog match the actual products, but printing variations and variations in chemical finishes and the nature of handapplied finishing will cause some differences between the printed images and actual product, and from one product to another.

We use only non-ferrous materials on the exterior parts of our outdoor products, and use the best available weather-resistant finishes. However, due to some extreme environmental conditions such as acid rain, salt air and ultraviolet exposure, we cannot guarantee our exterior finishes, with the exception of our LifeBrite® lanterns.

Due to environmental conditions such as soil acidity, concrete alkalinity and other corrosive soil and air conditions, we cannot guarantee our direct burial posts.



CONNECT WITH US













Like us: Facebook.com/Kichler.Lighting Follow us: Twitter.com/KichlerLight Watch us: YouTube.com/KichlerLighting Join us: Houzz.com/pro/KichlerLighting/Kichler

Find us: Pinterest.com/KichlerStyle Follow us: Instagram.com/KichlerLighting

To find an Authorized Dealer, visit Kichler.com.

KICHLER


7711 E. Pleasant Valley Rd. PO Box 318010 Cleveland, Ohio 44131-8010











ABBREVIATION KEY

AC	. Alternating Current
ADA	. Americans with Disabilities Act
ALM	. Almond
Amp	. Amperage
ССТ	. Color Temperature
CFL	. Compact Fluorescent Lamps
CFM	. Cubic Feet Per Minute
CLR	Clear
CRI	. Color Rendering Index
D	. Depth
dB	. Decibel
DC	. Direct Current
Dia	Diameter
Ft	. Feet
GA	. Gauge
H	Height
hrs	Hours
I.D	. Inside Diameter
IV	. Ivory
Κ	. Kelvin temperature
L	. Length
LED	. Light Emitting Diode
lm	. Lumens
lm/W	. Lumens per Watt
Max.	. Maximum
mm	. Millimeter
MUL	. Multiple Finishes
N/A	. Not Applicable
NPSM	. National Pipe & Thread - Straight, Male
O.D	. Outside Diameter
RPM	. Revolutions Per Minute
Sq. Ft	. Square Feet
V	. Volt
VA	. Volt-Amp
W	. Watt, when directly next to a number
W	. Width, when paired with L and/or H
Thd	.Thread

INDEX

3R200	263	300302	86	330243	200	370039	263
3R400	263	300352	138	330247	196	370040	264
3W500	263	300356	42	330347	198	370050	275
4043	278	300365	50	337001	262	371010	274
4051	278	300457	160	337005	265	371011	274
4052	278	300700	70	337007	265	371012	274
4055	278	300702	74	337008	265	371013	274
4056	278	300710	94	337009	263	371015	274
4058	278	310017	184	337010	264	371017	274
4060	278	310018	186	337011	264	371019	274
4062	278	310103	174	337012	264	371021	275
4063	278	310112	126	337033	235, 237, 239	371024	274
4064	278	310115	128	337214	263	371030	275
4069	278	310136	158	338200	269	371031	275
4070	278	310139	150	338629	268	371038	275
5902	278	310140	148	339013	172	371040	275
5903	278	310144	192	339218	232	371042	262
5905	278	310150	190	339224	230	371045	262
5907	278	310152	156	339413	170	371050	275
5910	278	310155	118	339501	224	371062	262
5919	278	310160	62	339629	124	371065	262
5920	278	310165	154	340010	273	371070	275
5925	278	310170	152	340011	273	371075	264
300024	144	310175	66	340012	273	371082	262
300026	212	310181	164	340114	273	371085	262
300027	146	310192	218	340115	273	371101	275
300027	78	310193	208	340116	273	380010	268
300030	112	310204	130	340121	273	380010	270
300031	114	310204	166	340121	273	380012	270
300052	38	310239	150	340127	273	380012	270
300060	58	310240	148	340128	273	380013	270
300103	222	310360	180	340129	273	380014	270
300103	220	310700	82	340129	273	380015	270
300107	214	320500	216	340130	273	380017	270
300146	120	330000	188	340133	273	380018	270
300160	98	330001	182	340135	273	380030	269
300168	106	330002	178	350015	272	380031	269
300188	206	330010	226	350210	272	380032	269
300200	54	330013	210	360000	276	380033	269
300206	168	330015	246	360001	276	380041	272
300208	194	330016	248	360002	276	380903	266
300230	102	330017	250	360003	276	380911	268
300238	162	330018	252	360004	276	380912	268
300239	132	330019	254	360005	276	380915	266
300250	176	330020	258	360006	276	380930	267
300251	136	330021	256	370005	262	380931	267
300253	28	330025	228	370006	262	380945	266
300254	46	330090	134	370010	263	380949	266
300256	140	330150	238	370011	263	380950	266
300265	34	330151	236	370021	274	380952	266
300269	142	330152	234	370022	274		
300270	110	330171	244	370032	264		
300275	116	330174	242	370034	274		
300285	32	330180	240	370035	274		
300300	90	330241	204	370036	264		
300301	88	330242	202	370038	263		

Our Vision

At Kichler Lighting, everything we do, every single day, is with the intention of creating and delivering products that allow people to see what matters most to them. We will do that by relentlessly pursuing quality, ensuring continued innovation, always going one step further in our commitment to exceptional customer service and education, as well as creating on-trend designs that are both stylish and "life-stylish," promising to deliver project success for you.

Get inspired at Kichler.com



Featured on Front Cover: Seaside™ LED Ceiling Fan 310181SBK | Page 164