


CHAIN DROP.

- 3) Rotate arms until in line with fixture body.
- 1) Screw loop to threaded pipe on top of fixture.
- 2) Pass screws through holes from inside fixture. Thread threaded balls onto screws.
- 3) Turn off power.
- 4) Take threaded pipe from parts bag and screw in screw collar loop a minimum of 6mm (1/4"). Lock into place with hexnut.
- 5) Run another hexnut down threaded pipe almost touching first hexnut. Now screw threaded pipe into mounting strap. Mounting strap must be positioned with extruded thread faced into outlet box. Threaded pipe must protrude out the back of mounting strap. Connect mounting strap to outlet box.
- 6) Unscrew the threaded ring from screw collar loop. Take canopy and pass over screw collar loop. Approximately one half of the screw collar loop exterior threads should be exposed. Adjust screw collar loop by turning assembly up or down in mounting strap. Remove canopy.
- 7) After desired position is found, tighten top hexnut up against the bottom of the mounting strap.
- 8) Slip canopy over screw collar loop and thread on threaded ring. Attach chain (with fixture connected) to bottom of screw collar loop. Unscrew threaded ring, let canopy and threaded ring slip down.
- 9) Weave electrical wire and ground wire through chain links no more than 3 inches apart. Pass wire through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.
- 10) Grounding instructions: (See Illus. A or B).
- A) On fixtures where mounting strap is provided with a hole and two raise dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
- B) On fixtures where a cupped washer is provided. Put ground wire from outlet box under cupped washer and green ground screw and thread screw into hole in mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector, (not provided) after following the above steps. Never connect ground wire to black or white power supply wires.




- 11) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor


*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

- 12) Raise canopy to ceiling.
- 13) Secure canopy in place by tightening threaded ring onto screw collar loop.
- 11) Screw threaded pipe into couplung on bottom of fixture body.
- 12) Slip flat washer then rubber washer over end of threaded pipe.
- 13) Lift glass up to fixture passing threaded pipe through hole in glass.
- 14) Slip rubber washer then flat washer over threaded pipe.
- 15) Screw hexnut onto end of threaded pipe to secure glass in place. (DO NOT over tighten.)
- 16) Pass trim over threaded pipe and screw finial onto end of threaded pipe. (DO NOT over tighten.)

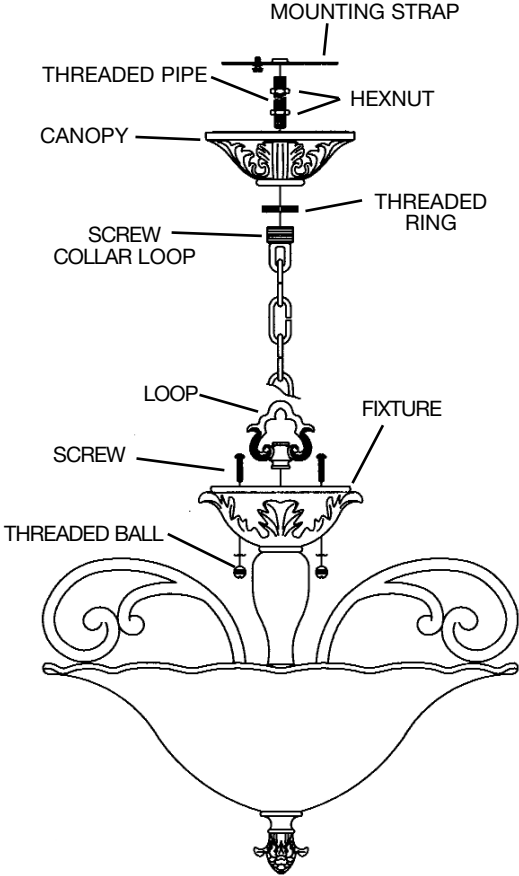

SEMI-FLUSH MOUNT

- 1) Remove loop from top of canopy.
- 2) Remove threaded balls from canopy. DO NOT discard threaded balls.
- 3) Rotate arms until in line with fixture body.
- 4) Turn off power.
- 5) Assemble mounting screws into threaded holes in mounting \ strap.
- 6) Attach mounting strap to outlet box. (Screws not provided)
- 7) Grounding instructions: (See Illus. A or B).
- A) On fixtures where mounting strap is provided with a hole and two raise dimples. Wrap ground wire from outlet box around green ground screw and thread into hole.
- B) On fixtures where a cupped washer is provided. Put ground wire from outlet box under cupped washer and green ground screw and thread screw into hole in mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector, (not provided) after following the above steps. Never connect ground wire to black or white power supply wires.



- 8) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

- 9) Push fixture to ceiling, carefully passing mounting screws through holes.
- 10) Secure fixture to ceiling with threaded balls.
- 11) Screw threaded pipe into couplung on bottom of fixture body.
- 12) Slip flat washer then rubber washer over end of threaded pipe.
- 13) Lift glass up to fixture passing threaded pipe through hole in glass.
- 14) Slip rubber washer then flat washer over threaded pipe.
- 15) Screw hexnut onto end of threaded pipe to secure glass in place. (DO NOT over tighten.)
- 16) Pass trim over threaded pipe and screw finial onto end of threaded pipe. (DO NOT over tighten.)

