


- 1) Pass wire from fixture through stem and screw stem to top of fixture. **NOTE:** Thread locking compound must be applied to all stem threads as noted with symbol (◄) to prevent accidental rotation of fixture during cleaning, relamping, etc.
- 2) Pass fixture wire through remaining stems and screw stems together.
- 3) Thread one small threaded pipe into end of each small loop.
- 4) Pass fixture wire through first loop. Thread first loop onto end of last stem.
- 5) Pass fixture wire through second loop and through hole in canopy.
- 6) Pass threaded pipe at end of second loop through hole in canopy.
- 7) Pass fixture wire through hole in loop on end of safety cable. Pass hole in loop on safety cable over end of threaded pipe.
- 8) Pass fixture wire through hole in lockwasher. Thread lockwasher onto end of threaded pipe protruding from inside canopy.
- 9) Pass fixture wire through hole in hexnut. Thread hexnut onto end of threaded pipe.
- 10) Attach chain link to small loop at end of stem and to loop on canopy.
- 11) **TURN OFF POWER.**

IMPORTANT: Before you start, NEVER attempt any work without shutting off the electricity until the work is done.

- a) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “OFF” position.
- b) Unscrew the fuse(s), or switch “OFF” the circuit breaker switch(s), that control the power to the fixture or room that you are working on.
- c) Place the wall switch in the “OFF” position. If the fixture to be replaced has a switch or pull chain, place those in the “OFF” position.

- 12) Find the appropriate threaded holes on mounting strap. Assemble mounting screws into threaded holes.
 - 13) Attach mounting strap to outlet box. (Screws not provided). Mounting strap can be adjusted to suit position of fixture.
 - 14) Connect safety cable assembled to canopy to mounting strap. (This will allow for fixture to be supported while wire connections are made.)
 - 15) Grounding instructions: (See Illus. A or B).
- A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
- B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.



If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector (not provided.) after following the above steps. Never connect ground wire to black or white power supply wires.

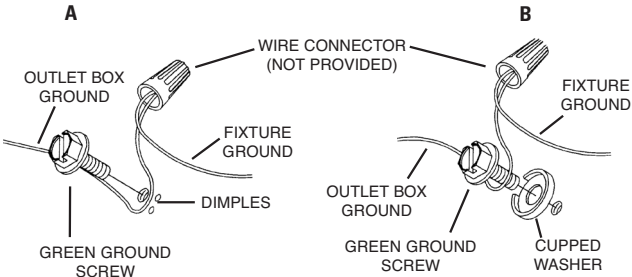

- 16) Make wire connections (connectors not provided). Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

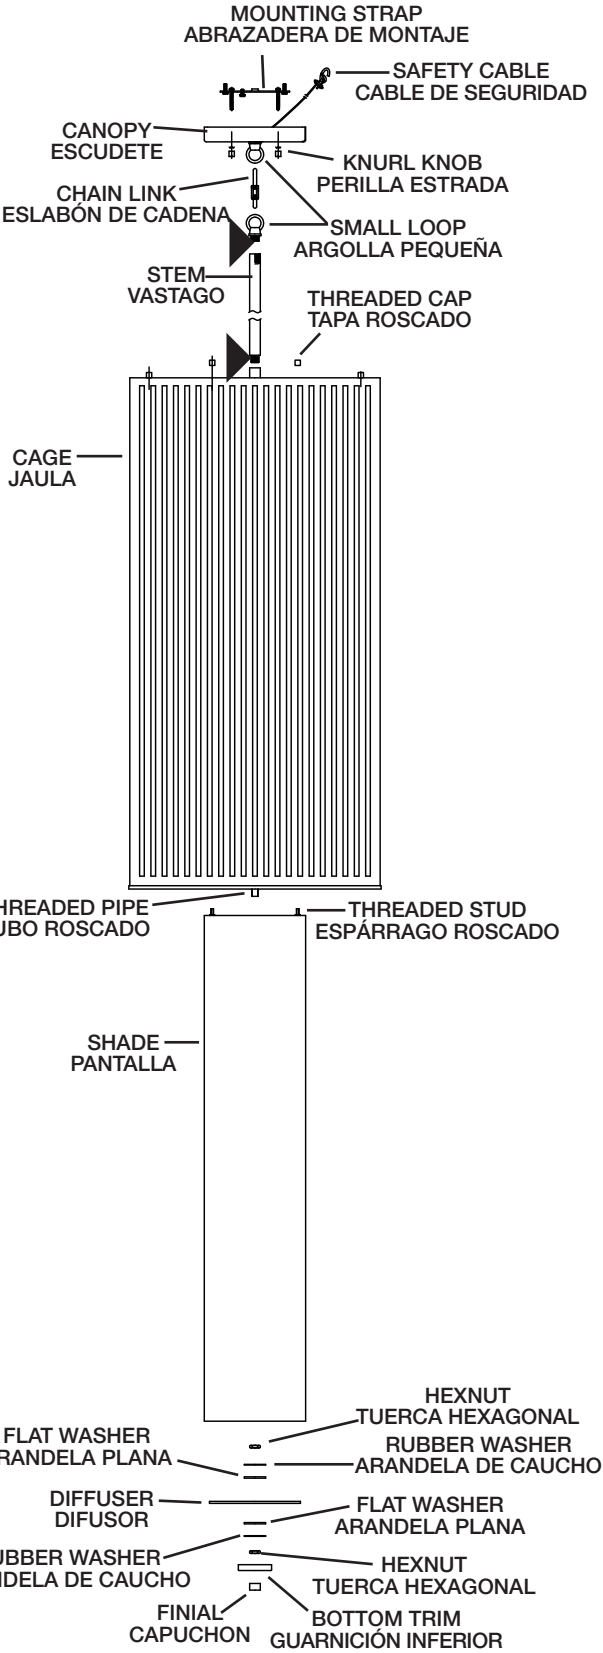

- 17) Push fixture to ceiling, carefully passing mounting screws through holes in canopy.
- 18) Thread knurl knobs onto mounting screws. Tighten knurl knobs to secure fixture to ceiling.
- 19) Insert recommended bulbs.
- 20) Raise shade up to fixture. Fit shade inside cage of fixture.
- 21) Pass ends of threaded studs on top of shade through holes in bracket on top of cage.
- 22) Screw threaded caps onto ends of threaded studs. Tighten threaded studs to secure shade in place.
- 23) Screw hexnut onto end of threaded pipe on bottom of fixture body.
- 24) Pass flat washer then rubber washer over end of threaded pipe.
- 25) Pass hole in glass diffuser over end of threaded pipe.
- 26) Pass rubber washer then flat washer over end of threaded pipe. Thread hexnut onto end of threaded pipe. Tighten hexnut to secure diffuser in place. (DO NOT over tighten.)
- 27) Pass hole in bottom trim over end of threaded pipe.
- 28) Thread finial onto end of threaded pipe. (DO NOT over tighten.)

SEE OTHER SIDE FOR SPANISH TRANSLATIONS.
VEA EL OTRO LADO DE TRADUCCIONES AL ESPAÑOL.

