


TaskWork LED Tape Light

24 Volt DC Outdoor Wet Location White & Single Colors

Project:

Location:

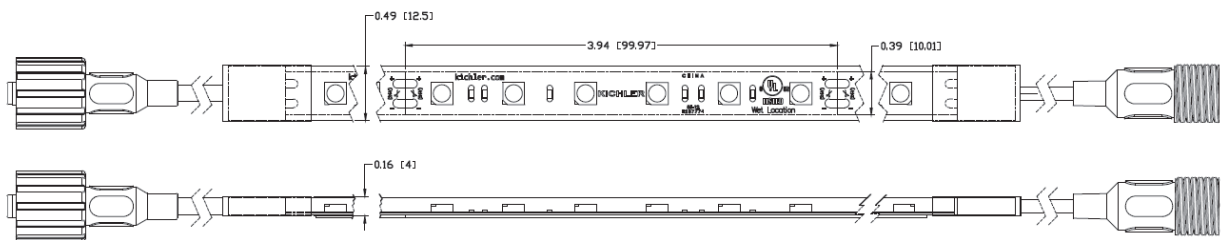

Description	Professional grade 24 volt LED Tape Light
Features	<ul style="list-style-type: none"> • Expected life 50,000 hrs at L70 • Fully dimmable when used with dimmable power supply • Sections can connect together end-to-end or be used individually • Tape can be cut every 4" at the end of a run • Once tape has been cut, the excess cannot be reused • 3M™/VHB professional grade adhesive backing for an easy peel-and-stick installation • UL outdoor wet location rated • IP67 Rated
Construction	Flexible, PCB with silicone and PVC coating with UV inhibitors. Pre-installed waterproof connectors on either end.
Operating Voltage	24V DC
CRI	80+ (white lights only)
Light Source	6 High Powered LED per 4" section
Beam Angle	120°
Operating Temperature	-10°C to +50°C (-30°F to +120°F)
Power Supply	Remote electronic Class 2 transformer. 120VAC 50/60Hz input, 24VDC output. UL listed 2108 and 1838 for outdoor wet locations.
Certification	FCC compliant, UL & CUL listed. UL 2108 and 1838 wet location rated, ROHS compliant, IP65 Rated
Warranty	5 year warranty. See www.Kichler.com for full warranty information

TaskWork LED Tape Light

24 Volt DC Outdoor Wet Location White & Single Colors

White: Select Color Temperature & Lumen Output

Description	High Output		
Features	<ul style="list-style-type: none"> • 20' Max Run Length • 200 Lumens / Ft. • 4 Watts / Ft. • 80 CRI 		
Pure White 3200K	320H32 WH, BK	20'	(80W)
	310H32 WH, BK	10'	(40W)
	34H32 WH, BK	4"	(16W)
	31H32 WH, BK	12"	(4W)
Cool White 3600K	320H36 WH, BK	20'	(80W)
	310H36 WH, BK	10'	(40W)
	34H36 WH, BK	4"	(16W)
	31H36 WH, BK	12"	(4W)




Colors: Select Color (Red, Blue, Green or Yellow) & Intensity



Description	High Output		
Features	<ul style="list-style-type: none"> • 20' Max Run Length • 4 Watts / Ft. • 200 Lm. / Ft. 		
Red LED Tape 630 nm	320HR WH, BK	20'	(80W)
	310HR WH, BK	10'	(40W)
	34HR WH, BK	4"	(16W)
	31HR WH, BK	12"	(4W)
Green LED Tape 575 nm	320HG WH, BK	20'	(80W)
	310HG WH, BK	10'	(40W)
	34HG WH, BK	4"	(16W)
	31HG WH, BK	12"	(4W)
Blue LED Tape 465 nm	320HB WH, BK	20'	(80W)
	310HB WH, BK	10'	(40W)
	34HB WH, BK	4"	(16W)
	31HB WH, BK	12"	(4W)
Yellow LED Tape 595 nm	320HY WH, BK	20'	(80W)
	310HY WH, BK	10'	(40W)
	34HY WH, BK	4"	(16W)
	31HY WH, BK	12"	(4W)

TaskWork LED Tape Light



24 Volt DC Outdoor Wet Location White & Single Colors

Select Accessories

LED Tape 10MM Mounting Clip	10180 (10 pack) <ul style="list-style-type: none">• Flexible mounting clip• Use as extra support for outdoor tape 
End Cap	10182 (10 pack) <ul style="list-style-type: none">• Caps the end of a cut piece of tape 
Silicone	10183 <ul style="list-style-type: none">• Use with 10182 for a water tight seal 

LED Tape IP67 Terminator Cap	10184 <ul style="list-style-type: none">• Caps last connector at end of tape run if tape is not cut 
3' Track Section	12330 WH, BK (10-pack) <ul style="list-style-type: none">• 3' track section• Snaps on the score every 6"• Captive screws every 6"• White or Black finish 

Select Power Supply Leads & Interconnect Cables

Interconnect Cables	31C2 CLR 2' Interconnect 31C5 CLR 5' Interconnect 31C10 CLR 10' Interconnect <ul style="list-style-type: none">• Used to connect 2 sections of tape together or to connect tape light to power supply 
3-Way Connector	3C3 CLR <ul style="list-style-type: none">• Connects directly to tape light, supply lead or power supply• Ideal for making "T" or "Y" connections.• One input, two outputs.• 6" length 

4-Way Connector	3C4 CLR <ul style="list-style-type: none">• One input, three outputs.• 6" length• Connects directly to tape light, supply lead or power supply 
--------------------	---

TaskWork LED Tape Light

24 Volt DC Outdoor Wet Location White & Single Colors

Select Outdoor Wet Power Supply

Total wattage of tape light cannot exceed wattage rating of power supply.

Plug-in Power Supply

10194AL25 25W

- 6' cord & plug
- 6' lead wire with waterproof DC2.1 jack
- Suitable for outdoor wet locations
- 2.5W minimum load requirement
- 9.5" L x 1.75" W x 1.25" H



10194AL60 60W

- 6' cord & plug
- 6' lead wire with waterproof DC2.1 jack
- Suitable for outdoor wet locations
- 6W minimum load requirement
- 9.5" L x 1.75" W x 1.25" H



10194AL100 100W

- 6' cord & plug
- 6' lead wire with waterproof DC2.1 jack
- Suitable for outdoor wet locations
- 10W minimum load requirement
- 9.5" L x 2.25" W x 1.5" H



KICHLER LIGHTING

World Headquarters
7711 E. Pleasant Valley Rd.
PO Box 318010
Cleveland, Ohio 44131-8010
www.kichler.com

© Copyright All rights reserved
Kichler Lighting