


tatalog 50





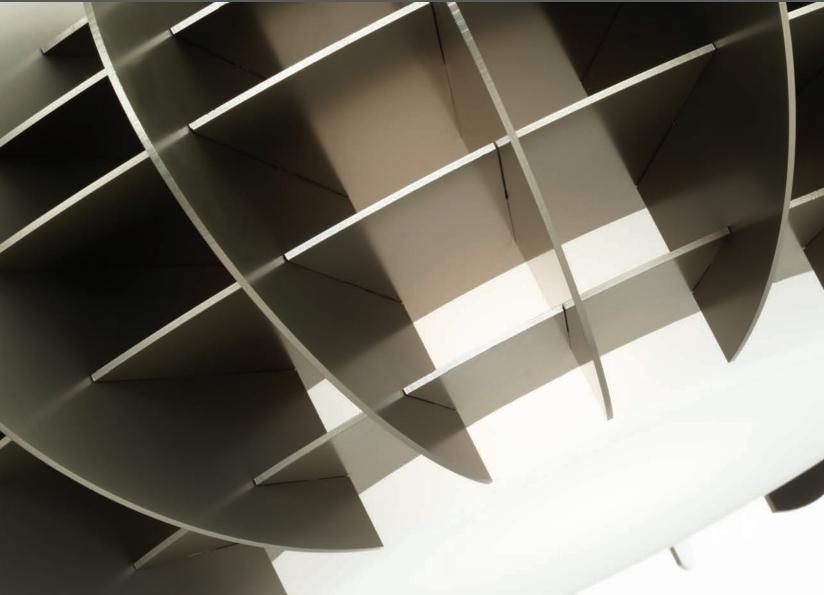


For over forty years, LBL has been synonymous with designing and manufacturing some of the most beautiful contemporary lighting in the industry. As we look forward, LBL will continue to provide a fresh, dramatic and vibrant take on contemporary lighting design. Designers and savvy consumers who admire the LBL brand desire cutting-edge, high-design through which they can transform their progressive spaces. Our new LBL designs each deliver something unique, often unexpected and absolutely beautiful. These exceptional design details often add a surprising twist, excitement, romance, drama, fantasy, bling or fun. And behind all this creative design, LBL is still committed to delivering the highest product quality, world-class service levels and industry-topping lead times. Wherever outstanding contemporary lighting is desired, LBL is your partner and brand.

#### Our process

Our new Product Designer and Artistic Director, Dennis Beard, has had the opportunity to thoughtfully and creatively drive the development process of every new LBL design for 2012. Inspired by an array of influences – fashion, art, architecture, nature, jewelry and world travel, Dennis infuses high design into the process – from initial sketch to final product. The result is 70+ fabulous new designs all with the unique point of view only Dennis could bring.



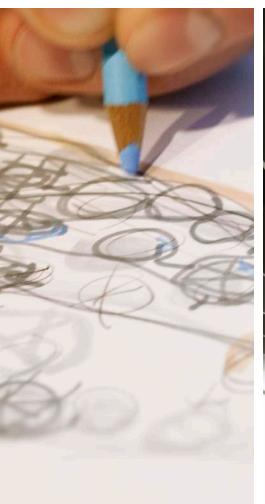










#### What's new

This introduction presents the largest, most dynamic new product launch in LBL's history. With 70+ new fixtures, our full line includes exciting ceiling fixtures (both suspension and flush mount), wall, bath, heads and pendants -- all possessing unique design details. Over 35% of our fixtures offer LED lamping options, so now you can achieve energy efficiency with fashionable style. Virtually every page offers something new. Crystals. Wood. Perforated Metal. Blown Glass. Zippers. Linen. Buttons. Etched Glass. Lattice. 2012 marks a reinvigorated and reimaged LBL Lighting.



#### some highlights of our new offering

boardwalk

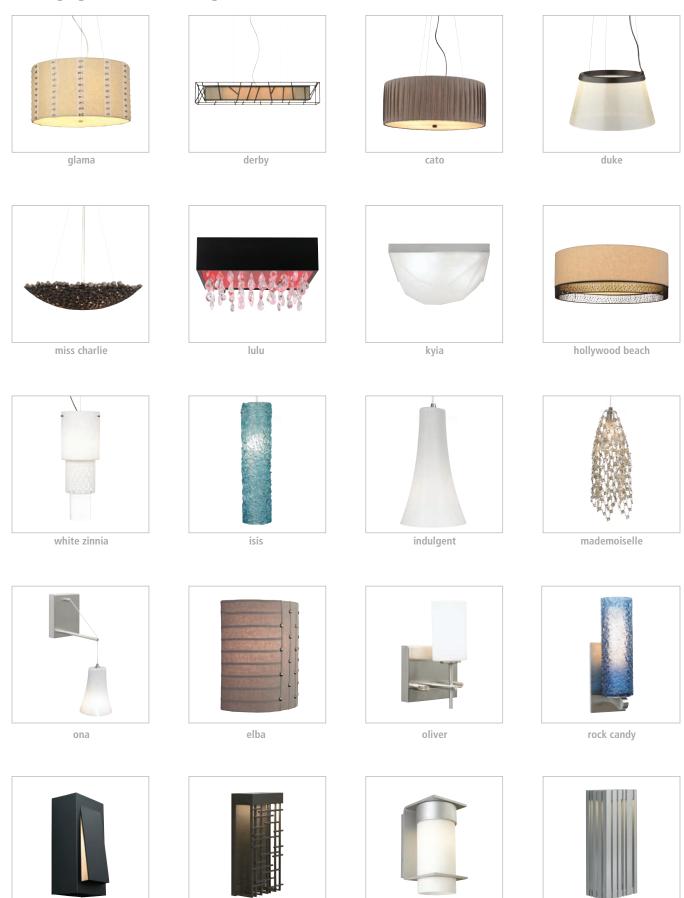

uptown

palm lane

pier 60









NEW



NEW

NEW



All fixtures available in Compact Fluorescent are indicated by this icon.




































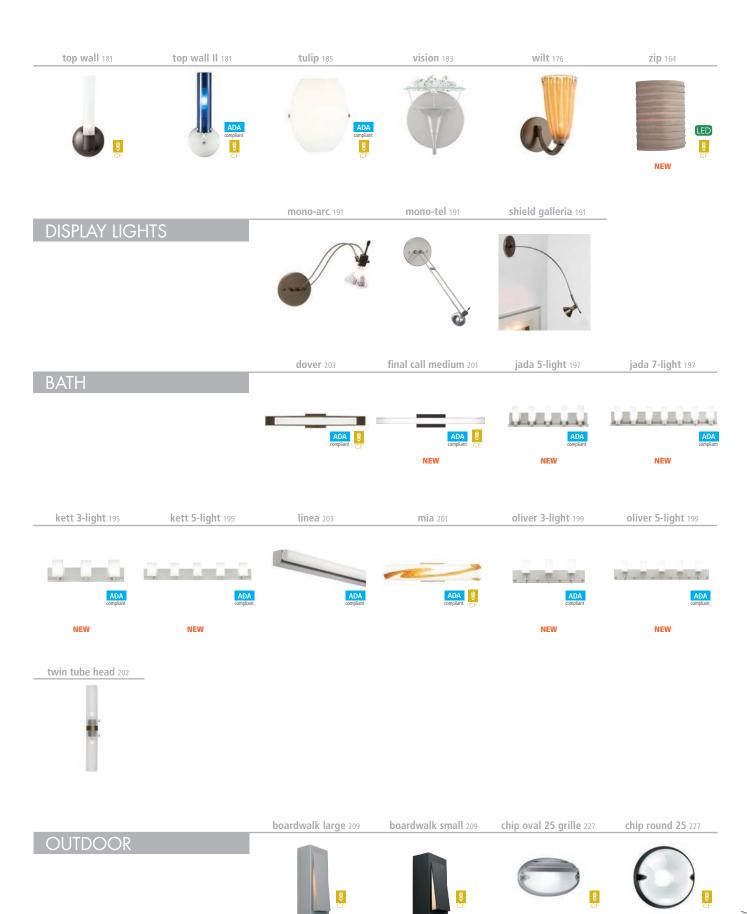

ADA All ADA Compliant fixtures compliant are indicated by this icon.

All fixtures available in Compact Fluorescent are indicated by this icon.

NEW

(LED) All fixtures available in LED are indicated by this icon.



PRODUCT OVERVIEW













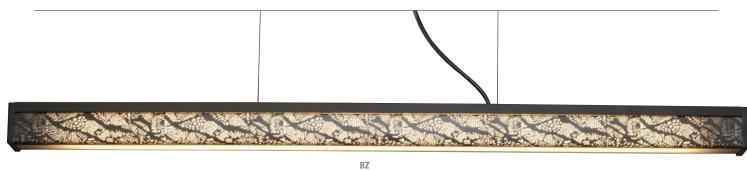





SC







Linear suspension with intricate laser-cut lace pattern and opal acrylic diffuser. Includes 6' of field-cuttable aircraft cable. Fluorescent includes (1) 39 watt mini bi-pin base T5 high output linear fluorescent lamp; LED includes (1) replaceable 12 watt 2700K LED module. 120v.

		FR frost		for PF only: <b>CF</b> T5HO mini bi-pin 39w for EF only: <b>LED</b> LED Module 12w
type <b>EF</b>	model 631	color <b>FR</b>	finish SC	LED
PF fluorescent EF LED			BZ bror GD gold SC satir	d

# elba 🥫

Striped fabric drum with metal studs and opal glass diffuser. Includes 6' of field-cuttable aircraft cable. Incandescent includes (4) E26 medium base 75 watt or equivalent A19 lamps; fluorescent includes (4) GU24 base 27 watt self-ballasted compact fluorescent lamps. 120v.



				for LF only: <b>2D</b> A19 E26 4x75w for PF only:
		<b>GY</b> gray		<b>CF</b> GU24 4x27w
type	model	color	finish	lamp
PF	683	GY	SC	CF

SC satin nickel

**LF** incandescent


PF compact fluorescent



#### sunny finial accessory



model	finish
FAC690	SC
	BZ bronze



#### sunkissed



Fabric drum with metal accents attached with acrylic tabs and opal glass diffuser. Includes 6' of field-cuttable aircraft cable. Incandescent includes (4) E26 medium base 75 watt or equivalent A19 lamps; fluorescent includes (4) GU24 base 27 watt self-ballasted compact fluorescent lamps. 120v.




		I. D. Common		for LF only: <b>2D</b> A19 E26 4x75w for PF only:
		IV ivory		<b>CF</b> GU24 4x27w
type	model	color	finish	lamp
LF	659	IV	SC	2D
LF incandescent			SC satin nickel	

LF incandescent PF compact fluorescent



shown with optional sunny finial accessory



#### sunny finial accessory



model	finish
FAC690	SC
	BZ bronze




#### cato

Fabric drum with pinking sheared seam detail and opal glass diffuser. Includes 6' of field-cuttable aircraft cable. Incandescent includes (4) E26 medium base 75 watt or equivalent A19 lamps; fluorescent includes (4) GU24 base 27 watt self-ballasted compact fluorescent lamps. 120v.

		GY gray		for LF only: <b>2D</b> A19 E26 4x75w for PF only: <b>CF</b> GU24 4x27w
type	model	color	finish	lamp
LF	655	GY	BZ	2D
LF incandescent PF compact fluorescent			BZ bror SC satir	

#### sunny finial accessory










Fabric drum highlighted with zipper details and opal glass diffuser. Includes 6' of field-cuttable aircraft cable. Incandescent includes (4) E26 medium base 75 watt or equivalent A19 lamps; fluorescent includes (4) GU24 base 27 watt self-ballasted compact fluorescent lamps. 120v.


				for LF only: <b>2D</b> A19 E26 4x75v for PF only:
		<b>BR</b> brown	n	<b>CF</b> GU24 4x27w
type	model	color	finish	lamp
LF	662	BR	SC	2D
LF incandescent			<b>SC</b> satir	n nickel
<b>PF</b> cor	mpact fluoi	rescent		

#### sunny finial accessory








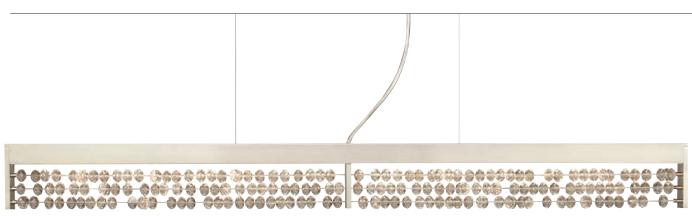

CS



AB



oka 🎟

Linear suspension with brilliant colored crystal beads reminiscient of an abacus. Includes 6' of field-cuttable aircraft cable and 12 watt 2700K LED module. 120v.

			LED LED module 12w 2700K
type <b>EF</b>	model 673	finish <b>AB</b>	LED
<b>EF</b> LED		AB dark amber-light amber-clear/gold CS clear/satin nickel	





hollywood beach Fabric drum with hand-crafted wire detail and opal glass diffuser. Includes 6' of field-cuttable aircraft cable. Incandescent includes (4) E26 medium base 75 watt or equivalent A19 lamps; fluorescent includes (4) GU24 base 27 watt self-ballasted compact fluorescent lamps. 120v.

> for LF only: **2D** A19 E26 4x75w for PF only: CF GU24 4x27w


TN tan model color finish lamp PF 650 TN BZ CF **BZ** bronze


**LF** incandescent PF compact fluorescent




p 50 flush mounts





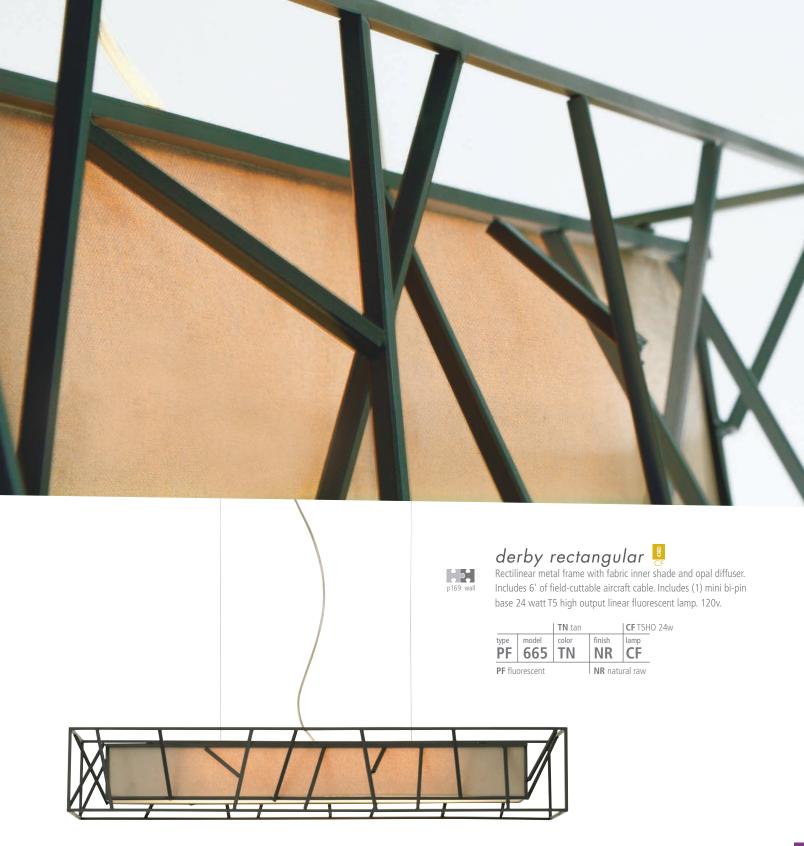






#### roxie

Two interlocking metal rings with various sizes of crystals. Includes 6' of field-cuttable aircraft cable and (1) 75 watt 12 volt GU5.3 base MR16 lamp. Dimmable with a standard incandescent dimmer.

		CR clear		<b>1A</b> MR16 75w
type	model	color	finish	lamp
HS	645	CR	SC	1A
<b>HS</b> ha	logen		<b>SC</b> satir	n nickel








# chicago jazz 🕫



Form and function unite with an elliptical grid of annodized aluminum panels that offer both ambient and down light. Includes black and white cloth-covered cord and 6' of field-cuttable aircraft cable. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 32 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 base 26 watt triple tube compact fluorescent lamp (not included). 120v.


		PE pewte	er	for LF only: <b>2D</b> A19 E26 75w for PF only: <b>CF</b> GX24Q-3 32w triple tube
type <b>LF</b>	model 643	color <b>PE</b>	finish SC	amp 2D
LF incandescent			<b>SC</b> satir	nickel


**LF** incandescent PF compact fluorescent



## glama 📴

Fabric drum with metal hook and eye accents, opal glass diffuser and metal finial. Includes 6' of field-cuttable aircraft cable. Incandescent includes (4) E26 medium base 75 watt or equivalent A19 lamps; fluorescent includes (4) GU24 base 27 watt self-ballasted compact fluorescent lamps. 120v.







### sunny finial accessory



model	finish
FAC690	SC
	BZ bronze

LI


PB

#### fiona grande

Modern round fabric shade with opal glass diffuser. Includes 6' of field-cuttable aircraft cable. Incandescent includes (4) E26 medium base 75 watt or equivalent A19 lamps; fluorescent includes (4) GU24 base 27 watt self-ballasted compact fluorescent lamps. 120v.

		LI linen PB pebble PE pewte		for LF only: <b>2D</b> A19 E26 4x75w for PF only: <b>CF</b> GU24 4x27w
type <b>LF</b>	model 680	color <b>PE</b>	finish SC	amp 2D
LF incandescent PF compact fluorescent			BZ bronze SC satin nickel	





sunny finial accessory



FAC690 SC **BZ** bronze SC satin nickel



#### duke 🖽

Glass shade with mica flakes or spherical glass beads embedded onto the glass and edge-lit by LED's. Includes 6' of field-cuttable aircraft cable and 12 watt 3000K LED module. 120v.

		CRFR clear glass w/ fizz CRMS clear glass w/ silver mica		LED LED module 12w 3000K	
type <b>EF</b>	model 667	color CR	finish <b>BZ</b>	LED	
<b>EF</b> LED			BZ bronze SC satin nickel		





#### miss charlie


Artful shade composed of carefully arranged individually welded tapered metal cylinders. Suspended from field-cuttable aircraft cable and available in 24", 36", 48" or 60" overall lengths. Includes (4) E26 medium base 60 watt or equivalent A19 lamps. 120v.

<b>BL</b> black				<b>24</b> 24" <b>36</b> 36" <b>48</b> 48" <b>60</b> 60"	overall overall
type <b>LF</b>	model 676	color <b>BL</b>	finish SC	length 24	2D
LF incandescent			SC satin nickel		<b>2D</b> A19 E26 4x60w











p 107 low-voltage pendants Discs of transparent crystal with sandblasted interior and decorative metal accents suspended from a rectilinear canopy. Other colors available as custom. While the individual Bling pendants cannot be adjusted, the overall height of the fixture can be easily modified in the field by shortening the suspension cables. Adjustable to minimum overall length of 25" and maximum overall length of 76". Includes (26) 10 watt low-voltage G4 base Xenon bi-pin lamps and (4) 75 watt electronic transformers. 12v. Dimmable with 600 watt low-voltage electronic dimmer.

	CR clear		<b>76</b> 76	" overall
model HS524	color CR	finish SC	length 76	
		SC satin nickel		










### batons

Twelve-light halogen suspension fixture in satin nickel. Supplied with frosted glass bulb covers. 24" diameter. Height of main assembly is 42". Includes (12) 10 watt low-voltage G4 base bi-pin lamps. 12V. (Note: Special lengths may be ordered; consult factory.)

	<b>12</b> 12-hea	ad	FR fros	st
model	head #	length	color	
HS206	12	05	FR	SC
		<b>05</b> 60"		SC satin nickel
		<b>10</b> 120		








### baybridge 3 light

Low-voltage, three-light chandelier with frosted glass shades. Field-cuttable stem adjusts height from 35" to 49". Fixture is 39" in length. Each glass is 3.5" in diameter. Includes (3) 50 watt low-voltage GU5.3 base MR16 lamps. 12v. Also available in five-light version.

		<b>1A</b> MR16 3x50w
model	finish	lamp
HS1861	SC	1A
	SC satin r BL black	nickel

sloped ceiling mount available as custom.



### . | I


### baybridge 5 light

Low-voltage, five-light chandelier with frosted glass shades. Field-cuttable stem adjusts height from 35" to 49". Fixture is 60" in length. Each glass is 3.5" in diameter. Includes (5) 50 watt low-voltage GU5.3 base MR16 lamps. 12v. Also available in three-light version.



		<b>1A</b> MR16 5x50w
model HS1881	finish	lamp 1 Δ
113 100 1	SC satin r BL black	nickel

sloped ceiling mount available as custom.








### twilight 12

Twelve frosted glass teardrops suspended on stainless steel arms. Colored glass teardrops may be ordered separately in several color choices (shown below). Heat resistant Flite Paper Shades are also available. 31" in diameter. Field-cuttable stem allows for easy shortening from standard lengths.Includes (12) 10 watt low-voltage G4 base bi-pin lamps. 12v. Dimmable with 600W low-voltage electronic dimmer. For special sloped ceiling mount, consult factory. Installed and shipped complete by LBL factory. Must be ordered with fixture (for factory installation).

					<b>60</b> 60" overall
	<b>12</b> 12-h	ead	<b>410</b> G4 1	l0w	<b>120</b> 120" overall
model	head #	option	lamp	finish	length
HS44	12		410	SC	60
		F flite p		<b>SC</b> sat	in nickel






### twilight 20

Twenty frosted glass teardrops suspended on stainless steel arms. Colored glass teardrops may be ordered separately in several color choices (shown below). Heat resistant Flite Paper Shades are also available. 40" in diameter. Field-cuttable stem allows for easy shortening from standard lengths. Includes (20) 10 watt low-voltage G4 base bi-pin lamps. 12v. Dimmable with 600W low-voltage electronic dimmer. For special sloped ceiling mount, consult factory. Installed and shipped complete by LBL factory. Must be ordered with fixture (for factory installation).

	<b>20</b> 20-he	ead	<b>410</b> G4 1	l Ow	<b>60</b> 60" <b>120</b> 12	overall 0" overall
model HS44	head # <b>20</b>	option	lamp <b>410</b>	finish SC	length 60	
		F flite p blank	none	<b>SC</b> sat	in nickel	6.5" 165 mm





green



red




amber

GB1BU

blue


GB1FR frost



Additional glass teardrops can be ordered in several color choices and may be easily attached with wide or narrow end toward the socket.









### multi-port canopy 11 round

11-light round metal canopy accented with solid wood detail. Compatible with all low-voltage LBL Fusion Jack pendants and swivel heads. Note: minimum 12" clearance between canopy and top of pendant or head is required.

		BZ bror SC satir	
model	canopy	finish	type
CK011BD-FJ-	MA	SC	
	MA maple WA walnut		120v IN/12V OUT -LED 120v IN/12V LED OUT

### multi-port canopy 7 rectangle

7-light rectangular metal canopy accented with solid wood detail. Compatible with all low-voltage LBL Fusion Jack pendants and swivel heads. Note: minimum 12" clearance between canopy and top of pendant or head is required.

		BZ bror SC satir	
model CK007RD-FJ-	canopy <b>WA</b>	finish <b>BZ</b>	type
	MA maple		120v IN/12V OUT




### tubes seven

Cascading frosted boroscillicate tubes of glass. Field-cuttable rods for easy shortening or consult factory to add length and additional tubes of light. 12V. Includes (13) 35 watt low-voltage GY6.35 base bi-pin lamps.



	FR fro	sted	<b>1B</b> GY6.35
model HS72932/1	color <b>FR</b>		1B35
		BZ bror SC satir	

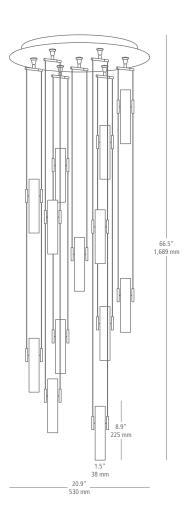



### 120v multi-light canopies

Multi-light canopies are ideal for creating a dramatic centerpiece over a dining table, kitchen island or reception area. Nothing beats the impact of multiple Italian glass pendants cascading from one of our multi-light canopies. Available in three finishes: bronze, glass or satin nickel. Our multi-light canopies can accommodate up to three or five line-voltage pendants. These canopies provide a perfect companion to our other products or equally strong as stand-alone fixtures. Compatible with halogen or incandescent pendants that hang from a single cord. See pp. 54-77 for Line-Voltage Pendants.



### 3 Round

1.5" deep 38mm

model CK003B-	canopy <b>BZ</b>
	BZ bronze GL glass SC satin nickel



### 5 Round

1.5" deep 38mm

model	canopy
CK005B-	SC
	BZ bronze
	<b>GL</b> glass
	<b>SC</b> satin nickel



### 3 Round Large

1.5" deep 38mm

model CK003D-	canopy <b>GL</b>
	BZ bronze GL glass SC satin nickel



### suspension swag hook

Used to change a line-voltage fixture's point of suspension to any point on the ceiling. Compatible with pendants that hang from a single cord.

SUSP-SWAGHOOK-	scanopy
	BL black BZ bronze SC satin nic WH white




### veneto

Italian Murano glass with delicate fused frit patterns and inlaid silver flakes. Shipped in an assembled overall height of 31", field-expandable to a maximum of 67". Ships with (1) additional 24" stem and (1) additional 12" stem. Bronze or satin nickel body and stems. Includes (1) 150 watt E11 mini-candelabra base lamp. 120v. Custom lengths available (consult factory).

# AM amber MO mocha OP opal RD red 2J150 E11 150w minican type Model ST AM SC 2J150 HS halogen BZ bronze


SC satin nickel



### veneto grande 🗓

Italian Murano glass with delicate fused frit patterns and inlaid silver flakes. Shipped in an assembled overall height of 32", field-expandable to a maximum of 68". Ships with (1) additional 24" stem and (1) additional 12" stem. Bronze or satin nickel body and stems. Fluorescent includes (3) 26 watt G24Q-3 base quad tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 250 watt E11 mini-candelabra base halogen lamp. 120v. Custom lengths available (consult factory).

HS halogen PF compact fluorescent			BZ bron	
type <b>HS</b>	model <b>318</b>	color <b>RD</b>	finish SC	2J250
		OP opal RD red		<b>326</b> G24Q-3 3x26w quad tube
AM amb				minican for PF only:
				for HS only: <b>2J250</b> E11 250w




### veneto venti



Italian Murano glass with delicate fused frit patterns and inlaid silver flakes. Shipped in an assembled overall height of 33", field-expandable to a maximum of 69". Ships with (1) additional 24" stem and (1) additional 12" stem. Bronze or satin nickel body and stems. Fluorescent includes (3) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (3) 100 watt or equivalent E26 medium base A19 lamp (not included). 120V. Custom lengths available (consult factory).

		AM amb MO mod OP opal RD red	cha	for LF only: 2D100 E26 A19 3x100w for PF only: 326 G24Q-3 3x26w quad tube
type <b>LF</b>	model 400	color MO	finish SC	2D100
LF incandescent PF compact fluorescent			BZ bron	






# big jelly

Blown Italian Murano bowls with genuine silver flakes, frit and black glass details. Shipped in an assembled overall height of 34", field-expandable to a maximum of 70". Ships with (1) additional 24" stem and (1) additional 12" stem. Bronze or satin nickel body and stems. Fluorescent includes (3) 26 watt G24Q-3 base quad tube compact fluorescent lamps and and electronic ballast; Halogen includes (1) 150 watt E11 mini-candelabra base halogen lamp. 120v

UC halanan			D7	
HS	319			2J150
type	model	color	finish	lamp
		MO moc	ha	for PF only: <b>326</b> G24Q-3 3x26w quad tube
		I <b>BU</b> blue		for HS only: 2J150 E11 150w minican

HS halogen
PF compact fluorescent
BZ bronze
SC satin nickel





# ambra cr

Italian organic handcrafted bowl with scavo finish. Shipped in an assembled overall height of 31.5", field-expandable to a maximum of 67.5". Ships with (1) additional 24" stem and (1) additional 12" stem. Halogen includes 120 volt 150 watt mini-candelabra base halogen lamp; fluorescent includes (3) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast.

HS   399   AM   HS halogen   PF compact fluorescent			BZ bronze	
type	model	color	finish	lamp
		AM amb		for HS only: <b>2J150</b> E11 150w minican for PF only: <b>326</b> G24Q-3 3x26w quad tube
				<b>2J150</b> E11 150w minican for PF only:
























Square flush mount lined in hammered metal suspended with crystals and dynamic color changing LED's Includes 32 watt color-changing LED module and remote control. 120v.

		BL black WH white		<b>LED</b> RGB LED module 32w
type LC	model 661		crystal color <b>CR</b>	lamp LED
LC LED			CR clear/fro	st




hollywood beach
Fabric drum with hand-crafted wire detail and opal glass diffuser. Incandescent includes (2) E26 medium base 75 watt or equivalent A19 lamps; fluorescent includes (3) GU24 base 27 watt self-ballasted compact fluorescent lamps. 120v.

p163 wall

				for JC only: <b>2D</b> A19 E26 2x75v for PC only:
		TN tan		<b>CF</b> GU24 3x27w
type	model	color	finish	lamp
JC	651	TN	BZ	2D
JC incandescent			<b>BZ</b> bronz	e
PC co	ompact flu	orescent		








kyia Square flush mount with a frosted faceted glass shade. May be ceiling or wall-mounted. Incandescent includes (2) E26 medium base 75 watt or equivalent A19 lamps; fluorescent includes (2) GX24Q-2 base 18 watt triple tube compact fluorescent lamps.

		FR frost		for JC only: <b>2D</b> A19 E26 2x75w for PC only: <b>CF</b> GX24Q-2 2x18w triple tube
type	model	color	finish	lamp
PC	644	FR	SC	CF
JC incandescent PC compact fluorescent			<b>SC</b> satin	nickel





### ambra

Semi-flush Italian organic handcrafted bowl with scavo finish. Accepts (3) 100 watt or equivalent E26 medium base A19 lamps (not included). 120V.

		AM am	oer	<b>2D100</b> A19 E26 3x100w
type	model	color	finish	lamp
JC	399	AM	BZ	2D100
JC incandescent		BZ bronze		
			SC satin nickel	





# wilt bowl




Semi-flush Italian organic handcrafted bowl with transparent crystal edging. Accepts (3) 100 watt or equivalent E26 medium base A19 lamps (not included). 120V.

		AM amb	oer	<b>2D100</b> A19 E26 3x100w
type	model	color	finish	lamp
JC	398	AM	BZ	2D100
JC incandescent		BZ bronze		
		SC satin nickel		





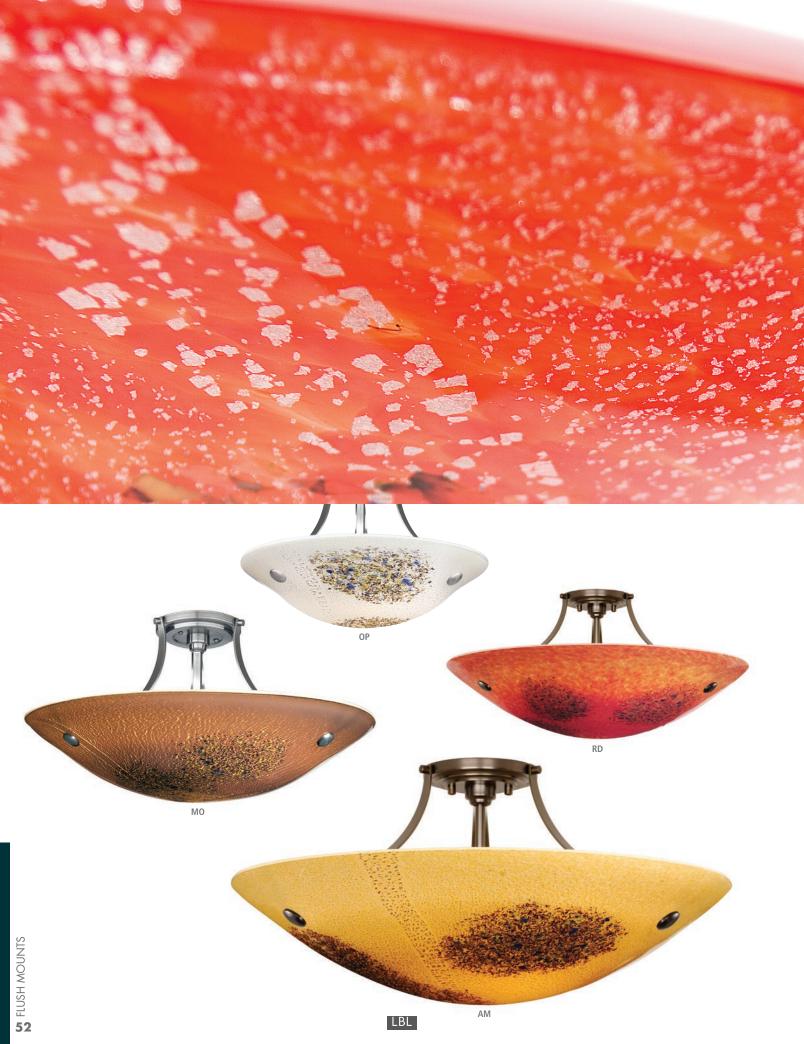





### veneto

Semi-flush Italian Murano bowls with delicate small frit accent patterns and inlaid silver flake. Canopy measures 5.5" in diameter. Accepts (3) 60 watt or equivalent E26 medium base A19 lamp (not included). 120V.


		MO mod OP opal	cha	
RD red				<b>2D60</b> E26 A19 3x60w
type	model	color	finish	lamp
JC	317	AM	SC	2D60
JC incandescent			BZ bronze	-

### veneto grande

Semi-flush Italian Murano bowls with delicate small frit accent patterns and inlaid silver flake. Canopy measures 5.5" in diameter. Accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included). 120V.

AM am MO mo OP opal RD red					
type <b>JC</b>	model <b>318</b>	color RD	finish SC	lamp 2D100	
JC incandescent			BZ bron: SC satin		

### veneto venti




measures 5.5" in diameter. Fluorescent includes (3) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (3) 100 watt or equivalent E26 medium base A19 lamps (not included). 120V.

		AM amber MO mocha OP opal RD red		for JC only: <b>2D100</b> E26 A19 3x100w for PC only: <b>326</b> G24Q-3 3x26w quad tube
type <b>JC</b>	model <b>400</b>	color MO	finish SC	2D100
JC incandescent PC fluorescent		BZ bronz SC satin		


















white zinnia Pendant of 3 nested glass shades: opal, opal-clear hand-cut and clear. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp. 120v.

		OOC opal-opal		for LF only: <b>2D</b> A19 E26 75w for PF only: <b>CF</b> GX24Q-2 18w triple tube	
type <b>LF</b>	model <b>595</b>	color OOC	finish SC	2D100	
LF incandescent PF compact fluorescent		BZ bror			








white zinnia grande Fendant of 3 nested glass shades: opal, opal-clear hand-cut and clear. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 26 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 base 32 watt triple tube compact lamp (not included). 120v.

		OOC opal-opal		for LF only: <b>2D</b> A19 E26 75w for PF only: <b>CF</b> GX24Q-3 26w triple tube
type <b>LF</b>	model <b>597</b>	color OOC	finish <b>BZ</b>	amp 2D
LF incandescent PF compact fluorescent		BZ bro	nze in nickel	



**julep** Crystal clear glass shade with a colorful fabric-covered cord. Includes cloth-covered cord. Incandescent includes (1) E26 medium base 60 watt or equivalent classic Edison lamp or (1) E26 based 60 watt or equivalent half-G40 half-chrome globe lamp; fluorescent includes (1) E26 medium base 11 watt Plumen<sup>™</sup> self-ballasted compact fluorescent lamp. 120v.

BW bl. BU blu RD rec			/white	<b>SC</b> sat	in nickel
type <b>PF</b>	model <b>677</b>	cord color RD	shade color	finish SC	cF
LF incandescent			CR clear		for LF o

**LF** incandescent

PF compact fluorescent

for LF only: 2DC classic edison style A19 E26 60w 2DH half-chrome G40 E26 60w for PF only: CF self-ballasted E26 11w Plumen™









BU








**isis** Streams of thick glass piping formed into a glass cylinder dif-Streams of thick glass piping formed into a glass cylinder diffused with an inner frosted glass cylinder. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 32 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 26 watt triple tube compact fluorescent lamp (not included). 120v. isa


AM am			r	for LF only:		
		AQ aqua		<b>2D</b> A19 E26 75w		
CR clear		CR clear		for PF only:		
SM smoke			3	<b>CF</b> GX24Q-3 32w triple tube		
type	model	color	finish	lamp		
LF	625	AQ	SC	2D		
LF incandescent PF compact fluorescent			BZ bror SC satir			



**showgirl** Frosted acrylic cylinder tipped with whimsical colored bristles. Includes black and white cloth-covered cord. Incandescent includes (1) E26 medium base 60 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp. 120v.

		BL black		for LF only: <b>2D</b> A19 E26 60w for PF only: <b>CF</b> GX24Q-2 18w triple tube
type <b>LF</b>	model 684	color <b>BL</b>	finish SC	lamp 2D
LF incandescent		<b>SC</b> satir	n nickel	

PF compact fluorescent





# dahling grande 🚦


Translucent glass cylinder features soft frit accents that transition from opal to gray. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 32 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 base 26 watt triple tube compact fluorescent lamp (not included). 120v.

p85 low-voltage pendants p163 wall

				for LF only: <b>2D</b> A19 E26 75w for PF only:		
		GO gray-c		CF GX24Q-3 26w triple tub		
_	model	aalau	finish.	lamn		

LF 608 GO SC 2D

**LF** incandescent **BZ** bronze PF compact fluorescent SC satin nickel







indulgent Fluted glass shade with colorful frit accents. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 26 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 base 32 watt triple tube compact fluorescent lamp (not included). 120v.

		AM amber OP opal RD red		tor LF only: <b>2D</b> A19 E26 75w  for PF only: <b>CF</b> GX24Q-3 26w triple tube
type <b>LF</b>	model <b>598</b>	color	finish <b>BZ</b>	2D
LF incandescent PF compact fluorescent			BZ bror SC satir	






# birdie grande 🖁



Clear glass cylinder embedded with copper rings and suspended from a soft gray glass cylinder. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 26 watt triple tube compact fluorescent lamp. May also be lamped with (1) GX24Q-3 base 32 watt triple tube compact fluorescent lamp (not included). 120v.

		GC gray-c		for LF only: <b>2D</b> A19 E26 75w for PF only: <b>CF</b> GX24Q-3 26w triple tube
type	model 627	color GC	finish SC	lamp 2D
LF incandescent PF compact fluorescent			<b>SC</b> satir	n nickel





# hollywood beach long Fabric drum with hand-crafted wire detail and opal glass

Fabric drum with hand-crafted wire detail and opal glass diffuser. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 26 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 base 32 watt triple tube compact fluorescent lamp (not included). 120v.

type model color finish lamp BZ 2D

LF incandescent PF compact fluorescent BZ bronze

for LF only:
2D A19 E26 75w
for PF only:
CF GX24Q-3 26w triple tube

72"
1828 mm
12"
15"
15"
15"
15"
114"
355"
9mm
114 mm
LF












zip Fabric cylinder highlighted with zipper details. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 26 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 base 32 watt triple tube compact fluorescent lamp (not included). 120v.

		BR brown		for LF only: 2D A19 E26 75w for PF only: CF GX24Q-3 26w triple tube
type	model	color	finish	lamp
LF	664	BR	SC	2D
LF incandescent PF compact fluorescent		<b>SC</b> satir	n nickel	





## olivia 📱

Designed by Koziol of Germany, this elegant and graceful modern pendant is comprised of 100% recyclable plastic which surrounds a hand-blown inner opal glass diffuser. Includes Incandescent includes (1) E26 medium base 60 watt or equivalent BT15 halogen lamp; fluorescent includes (1) GX24Q-3 base 32 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 26 watt triple tube compact fluorescent lamp (not included). 120v.

CR cle		BL black CR clear SM smo		for LF only: <b>2D</b> BT15 E26 60w for PF only: <b>CF</b> GX24Q-3 32w triple tube
type <b>LF</b>	model 566	color <b>BL</b>	finish SC	lamp 2D
LF incandescent			SC satin	nickel

**LF** incandescent PF compact fluorescent







p118 low-voltage pendants






pavia Grand cone-shaped glass with silver leaf band. Fluorescent includes (1) 26 watt G24Q-3 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 75 watt or equivalent E26 medium base A19 lamp (not included). 120V.

	AM amber BR brown			for LF only: <b>2D</b> A19 E26 75w		
		LT latte OP opal		for PF only: 26Q G24Q-3 26w quad tub		
ype <b>PF</b>	model 489	color <b>OP</b>	finish SC	lamp <b>260</b>		

**LF** incandescent BZ bronze **PF** compact fluorescent | **SC** satin nickel








### aiko 🚦

Mouth-blown glass is hand-etched in this modern twist on a traditional Japanese lantern. Includes Incandescent includes (1) E26 medium base 75 watt equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 32 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 26 watt triple tube compact fluorescent lamp (not included). 120v.

<b>LF</b> incandescent			BZ bron		
type <b>LF</b>	model 576	color	finish <b>SC</b>	lamp 2D	
l.		BR brown IV ivory OP opal		for LF only: <b>2D</b> A19 E26 75w for PF only: <b>CF</b> GX24Q-3 32w triple tube	








sora 🚦



Two-toned teardrop-shaped glass with an opal glass diffuser. Includes Incandescent includes (1) E26 medium base 75 watt equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 32 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 26 watt triple tube compact fluorescent lamp (not included). 120v.

lig			brown/ amber brown	for LF only: 2D A19 E26 for PF only: CF GX24Q-3	75w 32w triple tube
type <b>LF</b>	model 582	color <b>BA</b>	finish SC	lamp 2D	
LF incandescent PF compact fluorescent			BZ bron		














BR

### mason classic

A modern twist on an iconic shape. Classic Edison Lamp adds an eclectic edge to this transparent glass pendant. Includes (1) E26 medium base 30 watt or equivalent T9 classic Edison lamp. 120v.

	A	<b>M</b> amb	er		
	BF	R brow	n		
	CF	R clear		2D class	sic edison
	BU	<b>J</b> steel	blue	style	T9 E26 30w
type mod	del co	lor	finish	lamp	
LF 57	'3 B	R	SC	2D	
LF incandescent			BZ bronz SC satin		










A modern twist on an iconic shape. Rich transparent glass surrounds a opal glass diffuser. Includes Incandescent includes (1) E26 medium base 60 watt or equivalent BT15 halogen lamp; fluorescent includes (1) GX24Q-3 base 32 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 26 watt triple tube compact fluorescent lamp (not included). 120v.

		BR brow CR clear BU stee	/n	LF only: <b>2D</b> BT15 E26 60w for PF only: <b>CF</b> GX24Q-3 32w triple tube
type <b>LF</b>	model <b>594</b>	color <b>BU</b>	finish SC	CF
LF incandescent PF compact fluorescent			BZ bron: SC satin	











p94 low-voltage pendants p149 heads p170 wall

rock candy cylinder Cylinder of mouth-blown transparent glass rolled in clear crystal frit and flash heated to create this unique texture. Inner opal glass diffuser adds depth to the pendant. Incandescent includes (1) E26 medium base 60 watt or equivalent BT15 halogen lamp; fluorescent includes (1) GX24Q-3 base 26 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 32 watt triple tube compact fluorescent lamp (not included). 120v.


		CR clear AM darl SM smo BU stee	k amber oke	for LF only: <b>2D</b> BT15 E26 60w for PF only: <b>CF</b> GX24Q-3 26w triple tube
type	model	color	finish	lamp
LF	553	CR	BZ	2D
LF incandescent		BZ bron	ze	
PF compact fluorescent			SC satin nickel	

PR amethyst




SM

AM



miyu GF Beautiful transparent teardrop-shaped glass with silver leaf band surrounds an opal glass diffuser. Includes Incandescent includes (1) E26 medium base 75 watt equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 32 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 26 watt triple tube compact fluorescent lamp (not included). 120v.


BR dark GY gray BU stee			for LF only: <b>2D</b> A19 E26 75w for PF only: <b>CF</b> GX24Q-3 32w triple tub		
type <b>LF</b>	model <b>578</b>	color <b>BU</b>	finish SC	lamp 2D	
LF incandescent PF compact fluorescent			BZ bronze SC satin nickel		





miyu classic A modern twist on an iconic shape. Classic Edison Lamp adds an eclectic edge to this transparent glass pendant. Includes (1) 30 watt T9 E26 medium base classic Edison lamp. 120v.

		BR dark GY gray BU stee		<b>2D</b> classic e T9 E26	
type <b>LF</b>	model 581	color <b>GY</b>	finish SC	amp 2D	
LF incandescent			BZ bron:		










abbey grande Grand transparent stained glass-style outer glass cylinder with opal inner glass. Incandescent Includes (1) E26 medium base 75 watt equivalent A19 lamp; Flourescent includes (1) GX24Q-3 base 26 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 32 watt triple tube compact fluorescent lamp (not included). 120V.

nodel			` '
	AMP amb AMR amb BAR blue-	er-purple	for LF only: <b>2D75</b> A19 E26 75w for PF only: <b>26T</b> GX24Q-3 26w triple tube

LF incandescent PF compact fluorescent SC satin nickel






## monty !


Mouth-blown elliptical-shaped Murano glass with millefiore glass fusion and silver flakes. Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included); Fluorescent includes (1) 27 watt GU24 base self-ballasted compact fluorescent lamp. 120V.

		BU blue MO mocha OP opal RD red		for LF only: <b>2D100</b> A19 E26 100w for PF only: <b>27GU</b> GU24 27w	
type <b>LF</b>	model 935	color <b>OP</b>	finish SC	2D100	
LF incandescent PF compact fluorescent			PC polished chrome SC satin nickel		



addison Massive hand-blown glass with opal or brown frit accents. Includes 150 watt or equivilent medium base G40 globe lamp. 120v.

		BR brow OP opal	'n	<b>2D</b> G40 E26 150v
type <b>LF</b>	model 584	color <b>OP</b>	finish SC	lamp <b>2D</b>
LF in	candescer	nt	BZ bron SC satin	










drop Gentle cone-shaped glass. Fluorescent includes (1) 18 watt G24Q-2 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included). 120V.


		BU blue NU nuag OP opal		for LF only: <b>2D100</b> A19 E26 100w for PF only: <b>18Q</b> G24Q-2 18w quad tube
type <b>LF</b>	model <b>5490</b>	color <b>OP</b>	finish <b>BL</b>	2D100
LF incandescent PF compact fluorescent		BL black SC satin nickel PC polished chrome		





dome-S-I-grande
Cased opal glass enclosed in mouth-blown transparent Murano glass. Satin nickel finish and black cord. Includes (1) 60 watt G9 base Halogen lamp. 120V.

		AM amb BU blue CR clear RD red	er	<b>2G60</b> G9 60w
type <b>HS</b>	model 246	color CR	finish SC	2G60
HS halogen			SC satir	n nickel




CR

## renée II

Mouth-blown opal white glass. Accepts (1) 60 watt or equivalent E26 medium base T10 lamp (not included).



		<b>OP</b> opal		<b>2D60</b> T10 E26 60w
type <b>LF</b>	model 301	olor OP	finish SC	<sup>lamp</sup> <b>2G60</b>
LF in	LF incandescent		SC satin	nickel





**PF** compact fluorescent




E26 medium base A19 lamp (not included). 120V.



for LF only: 2D100 A19 E26 100w for PF only: 18Q G24Q-2 18w quad tube MO mocha type model color

**LF** 185 MO SC 2D100 **LF** incandescent SC satin nickel










icicle II pendants in opal

icicle || Opal Crystalline glass with beautiful clear draw. Fluorescent includes (1) 18 watt GX24Q-2 base triple tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 60 watt E11 mini-can base krypton lamp. 120V.

		<b>OP</b> opal		for HS only: 2J60 60w minican for PF only: 18T GX24Q-2 18w triple tube
type <b>HS</b>	model <b>397</b>	color <b>OP</b>	finish SC	2J60
HS halogen PF compact fluorescent			BZ bron: SC satin	








## perf 🚦

Perforated metal cylinder with chrome coat finish and frosted acrylic diffuser. Special food service version features acrylic lens on bottom, no acrylic diffuser (to order, add suffix "-FP" to model number). Fluorescent includes (1) 32 watt GX24Q-3 base triple tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base A19 lamp (not included). 120V.

		CC chroi	me coat	
type <b>LF</b>	model <b>5500</b>	color	2D60	154
LF incandescent PF compact fluorescent		escent	for LF only: <b>2D60</b> A19 E26 60w for PF only: <b>32T</b> GX24Q-3 32w triple tube	134






## nube suspension 214

Frosted glass cone. All finishes ship with black cord except white, which ships with a white cord. Includes (1) 60 watt G9 base Halogen lamp. 120V.

	BU cobalt blue FR frost RU ruggine   1 2G60 G9 60w				
model			lamp		
HS214	BU	BL	2G60		
		BL blac PC poli: SC satir WH wh	shed chrome n nickel		







## silver bullet 🚦



Satin nickel steel reflector. Fluorescent includes (1) 32 watt GX24Q-3 base triple tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included). 120V.

		PC polis SC satin	hed chrome nickel			Ш	72"
type <b>LF</b>	model 900	finish PC	2D100		1.2" 6" 30 mm		/2 1828 mm
	candescent Impact fluor	escent	for LF only: <b>2D100</b> A19 for PF only: <b>32T</b> GX24Q- 32w triple tu	3	PF .35" 4.5" 9 mm 114 mm LF	4.5"	10" 254 mm




### volo

Stainless steel cylinder ideal for commercial, residential or restaurant use. Choose between 30", 42" or 60" stem. Accepts (1) 75 watt or equivalent E26 medium base A19 lamp (not included). 120V.



	SS stainles	s steel	<b>2D75</b> A19 E26 75w
model HS361	finish SS	stem 30	2D75
		30" str 42" str 60" str	




Glass cylinder with organic layered glass detail and polished chrome metal accents. Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included); FI scent includes (1) 27 watt GU24 base self-ballasted compact fluorescent lamp. 120V.

		AM amb		for LF only: <b>2D100</b> A19 E26 100w for PF only: <b>32GU</b> GU24 32w	4.5° 9 mm		72" 1828 mm
type	model 236	color	finish SC	2D100			495 mm
	candescer ompact flu		SC satin	nickel		6.3"	



*piattini*Elegant Swarovski crystals on a large diameter glass lens. Field-adjustable from overall length of 5' or 10'. Includes (1) 75 watt low-voltage GU5.3 base MR16 lamp. 120v.

		AM amb		<b>1A75</b> MR16	5 75w
type <b>HS</b>	model <b>173</b>	color CR	finish PC	lamp 1A75	length 05
<b>HS</b> halogen			SC satin nickel PC polished chrome		<b>05</b> 60" <b>10</b> 120'






## juniper 🖁

Mouth-blown glass cylinder with sandblasted vertical lines. Fluorescent includes (1) 32 watt GX24Q-3 base triple tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included). 120V.

		<b>OP</b> opal		for LF only: 2D100 A19 E26 100w for PF only: 32T GX24Q-3 32w triple tub
type	model 229	oP color	finish SC	2D100
LF incandescent PF compact fluourescent			SC satin PC polish	nickel ned chrome





## kona II 📱

**PF** compact fluorescent

Mouth-blown cone-shaped glass. Fluorescent includes (1) 18 watt G24Q-2 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included). 120V.

SC satin nickel/clear cord

WH white/white cord

		AP apric BU blue OP opal	ot	for LF only: <b>2D100</b> A19 E26 100w for PF only: <b>18Q</b> G24q-2 18w quad tube
type <b>LF</b>	model <b>5180</b>	color <b>BU</b>	finish <b>BL</b>	2D100
LF incandescent		<b>BL</b> blac	k/black cord	












mademoiselle no. 1 A single layer of sterling silver Swarovski™ crystal web draped over a halogen MR16 lamp. Includes (1) 50 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	CC clear crystal CG golden shadow		<b>1A</b> MR16 50	W
model HS678			mount MRL	
		SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail






## mademoiselle no. 2

Double layers of sterling silver Swarovski™ crystal web draped over a halogen MR16 lamp. Includes (1) 50 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	CC clear cry			
	CG golden shadow		<b>1A</b> MR16 50	W
model	color	finish	lamp	mount
HS686	CG	SC	1A	MRL
	SC satin nick		el	FSJ fusion jack*
				MPT monopoint**
				MR2 2-circuit railt
				MRL monorail




 $<sup>^{*}</sup>$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{**}$  Includes 4" Round Flush Canopy.

mini-white zinnia Pendant of 3 nested glass shades: opal, opal-clear hand-cut and clear. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).



	OOC opal-opal-clear		1B GY6.35 X LED LED mod	
model HS596	color OOC	finish SC	lamp 1B	mount MRL
		BZ bronze SC satin nicke	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail






## sulton 🖽

Moroccan-inspired cased glass shade. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

BU light blue OP opal GY gray		ie	1B GY6.35 Xenon 50w LED LED module 6w		
model HS687	color <b>BU</b>	finish SC	lamp 1B	mount MRL	
		BZ bronze SC satin nick	el	FSJ fusion MPT mon MR2 2-cir MRL mon	opoint** cuit rail





 $<sup>^{*}</sup>$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{**}$  Includes 4" Round Flush Canopy.



## relic no. 1

Pear-shaped glass shade with playful silver accents. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber CR clear GR green OR orange		<b>1B</b> GY6.35 >	Kenon 35w
model HS688	color <b>AM</b>	finish <b>BZ</b>	lamp 1B	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





## relic no. 2

Pear-shaped glass shade with playful silver accents and inner opal glass diffuser. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber CR clear GR green OR orange		<b>1B</b> GY6.35 X	Kenon 35w
model HS689	color CR	finish SC	lamp 1B	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



 $<sup>^{*}</sup>$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{**}$  Includes 4" Round Flush Canopy.

CR


## birdie 🚥

Clear glass cylinder embedded with copper rings and suspended from a soft gray glass cylinder. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).



	GC gray-cle		1B GY6.35 X LED LED mod	
model HS628	color GC	finish SC	1B	mount MRL
		SC satin nick	el	FSJ fusion ja

FSJ fusion jack\* MPT monopoint\*\* MR2 2-circuit rail MRL monorail





## mini-birdie 🚥

Clear glass cylinder embedded with copper rings and suspended from a soft gray glass cylinder. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).



		1		35 Xenon 50w	
	GC gray-	GC gray-clear		module 6w	
model	color	finish	lamp	mount	
HS629	GC	SC	1B	MRL	
		SC satin	nickel	FSJ fusion jack* MPT monopoin MR2 2-circuit ra	t*

MRL monorail





LBL


<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.

# p60 line-voltage pendants p163 wall



dahling ITALES Translucent glass cylinder features soft frit accents that transition from opal to gray. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix '-24' to item number (LED lamp option is not compatible with 24 volt transformers).

			1B GY6.35 X	enon 50w
	GO gray-opal		LED LED mod	dule 6w
model	color	finish	lamp	mount
HS616	GO	SC	1B	MRL
		BZ bronze		FSJ fusion jack*
		SC satin nicke	el	MPT monopoint**
				MR2 2-circuit rail
				MRL monorail





p60 line-voltage pendants p163 wall



from opal to gray. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix '-24' to item number (LED lamp option is not compatible with 24 volt transformers).



<b>GO</b> gray-opa		al	<b>1B</b> GY6.35 X <b>LED</b> LED mod	
model HS621	color <b>GO</b>	finish SC	lamp 1B	mount MRL
		BZ bronze SC satin nicke	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.

mini-indulgent ED Fluted glass shade with colorful frit accents. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).



	AM amber OP opal RD red		1B GY6.35 X	
model HS599	color <b>AM</b>	finish <b>BZ</b>	lamp 1B	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint

MR2 2-circuit rail MRL monorail







mini-hollywood beach Fabric drum with hand-crafted wire detail and opal glass

diffuser. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix '-24' to item number (LED lamp option is not compatible with 24 volt transformers).



p 26 suspension p 50 flush mounts p 62 line-voltage pendants p163 wall

model HS652	TN color	finish <b>BZ</b>	1B	mount MRL
	TN tan		LED LED mod	

BZ bronze

FSJ fusion jack\*
MPT monopoint\*\*
MR2 2-circuit rail

MRL monorail





<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.





mini-springview
Glass cylinder finished with grass-like hand-carved detail. Includes (1) 50 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	CR clear			
	SM smoke		<b>1A</b> MR16 50	W
model	color	finish	lamp	mount
HS604	CR	BZ	1A	MRL
		BZ bronze		FSJ fusion jack*
		SC satin nicke	el	MPT monopoint**
				MR2 2-circuit rail
				MRL monorail








springview
Glass cylinder finished with grass-like hand-carved detail. Includes (1) 50 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	CR clear SM smoke		<b>1A</b> MR16 50	
model	color	finish		
HS603	SM	BZ	1A	MRL
		BZ bronze SC satin nickel		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail
				MRL monorail



AM

## mojave 🖽

Organic dome-shaped frosted glass hand-worked clear layered drizzle with decorative silver leaf. Includes (1) 35 watt low-voltage GY6.35 base Halogen bi-pin lamp or 6 watt replaceable LED module. For use with 4 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM amber PR amethyst FR frost GR green		<b>1B35</b> GY6.3	5 Halogen 35w dule 6w	
model HS469	color <b>AM</b>	finish SC	1B35	mount MRL	
		<b>BZ</b> bvronze <b>SC</b> satin nick	el	FSJ fusion jack* MPT monopoint MR2 2-circuit ra MRL monorail	* 1





FR



## abbey 🖽

Transparent stained glass-style outer glass cylinder with opal inner glass. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AMP amber-purple AMR amber-red BAR blue-amber-red		<b>1B50</b> GY6.35 Xenon 50w <b>LED</b> LED module 6w	
model HS459	color AMR	finish SC	1B50	MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.

AMR









## briolette 🖽

Transparent glass teardrop pendant with hand-etchings. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM amber BR brown FR frost SM smoke		<b>1B</b> GY6.35 X <b>LED</b> LED mod	
model HS549	color SM	finish <b>BZ</b>	lamp 1B	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail








## chill

Organic-shaped transparent glass with ice-fractured texture and frosted scavo finish to help diffuse the light. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BU blue CR clear		<b>1B</b> GY6.35 X	enon 50w
model HS583	color <b>BU</b>	finish SC	lamp 1B	MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.





 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.










## mini-isis cylinder 🖽

Streams of thick glass piping formed into a glass cylinder. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM amber AQ aqua CR clear SM smoke		<b>1B</b> GY6.35 X <b>LED</b> LED mod		
model HS545	color CR	finish SC	lamp 1B	mount MRL	
		BZ bronze SC satin nick	el	FSJ fusion MPT mor MR2 2-ci	nopoint** rcuit rail



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.

CR

# 

Sphere of mouth-blown transparent glass rolled in clear crystal frit and flash heated to create this unique texture. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	PR amethyst CR clear AM dark amber SM smoke BU steel blue		<b>1B</b> GY6.35 X <b>LED</b> LED moo		
model HS546	color CR	finish <b>BZ</b>	la mp 1B	mount MRL	
		BZ bronze SC satin nicke	el	FSJ fusion MPT mon MR2 2-ci MRL mon	nopoint** ircuit rail





# mini-rock candy cylinder © Cylinder of mouth-blown transparent glass rolled in clear crystal

Cylinder of mouth-blown transparent glass rolled in clear crystal frit and flash heated to create this unique texture. Inner opal glass diffuser adds depth to the pendant. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	PR amethyst CR clear AM dark amb SM smoke		<b>1B</b> GY6.35 X	
	<b>BU</b> steel blue	J steel blue		dule 6w
model	color	finish	lamp	mount
HS547	BU	SC	1B	MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRI monorail



\* Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.



LBL


**P6** PENDANTS LOW-VOLTAGE



## mini-olivia 🕮

Designed by Koziol of Germany, this elegant and graceful modern pendant is comprised of 100% recyclable plastic which surrounds a hand-blown inner opal glass diffuser. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	BL black CR clear SM smoke		<b>1B</b> GY6.35 X <b>LED</b> LED mod	
model HS565	color SM	finish SC	lamp 1B	mount MRL
		SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



# ariana

CR

Crystal beads strung together to create this elegant pendant draped over an opal glass diffuser. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

,		BR brown CR clear		<b>1B</b> GY6.3	5 Xenon 50w
	model HS587	color BR	finish SC	lamp 1B	mount MRL
			BZ bronze SC satin n		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail

\_ 8" \_ 203 mm

<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.

## fiona


Modern round fabric shade with glass diffuser. Includes (2) 35 watt low-voltage GY6.35 base Xenon bi-pin lamps. For use with 24 volt transformer, add suffix "-24" to item number.



	LI linen PB pebble PE pewter		<b>1B</b> GY6.35 X	enon 2x35w
model HS590	color <b>PE</b>	finish SC	lamp 1B	mount MRL
		BZ bronze SC satin nick	el	MPT monopoint** MR2 2-circuit rail MRL monorail








## horizon 💷

Mouth-blown pendant rich with color and deep clear draw. Inspired by slow-moving lava flow; each piece is unique. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	PR amethyst BR dark brov OP opal BU steel blue		<b>1B</b> GY6.35 X <b>LED</b> LED mod	
model HS586	color <b>OP</b>	finish SC	lamp 1B	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack MPT monopoint** MR2 2-circuit rail MRL monorail







 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.





BU

## aquarii 🖽

Seasonal ocean surf-inspired blown-glass globe with layers of color. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

			1B GY6.35 X LED LED mod	
model HS542	color <b>BU</b>	finish SC	1B	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail








### rio 🖽

Mouth-blown pendant with a smoke-like movement of color. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	BB amber/da brown			
			1B GY6.35 Xenon 50w LED LED module 6w	
model HS585	color BB	finish SC	lamp 1B	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack MPT monopoint** MR2 2-circuit rail MRL monorail




 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.

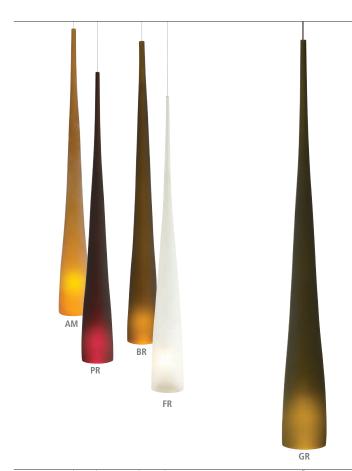

cypree large ED Slender modern organic-shaped frosted glass. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber PR amethyst BR brown FR frost GR olive gree	en	<b>1B50</b> GY6.3 <b>LED</b> LED mod	
model HS462	color <b>GR</b>	finish <b>BZ</b>	1B50	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail








cypree small LED Slender modern organic-shaped frosted glass. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber PR amethyst BR brown FR frost GR olive gree	en	<b>1B50</b> GY6.3! <b>LED</b> LED mod	
model HS463	color <b>AM</b>	finish SC	1B50	mount MRL
		BZ bronze SC satin nickel		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.

AM

 $clay \ II$  Large diameter pressed glass dome with delicate hand decoration in ivory white, terra gray and wenge brown. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	IW ivory white   TG terra gray   WB wenge brown   1B50 GY6.35 Xenon 50w			
model HS307	color WB	finish SC	1B50	mount MRL
		BZ bronze SC satin nicke	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





### emi 🕮

Two-toned powder frit pendant. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

			1B GY6.35 Xenon 50w LED LED module 6w		
model HS593	color CB	finish SC	lamp 1B	mount MRL	
		BZ bronze SC satin nick	el	FSJ fusion MPT mor MR2 2-ci MRL mor	nopoint** rcuit rail





 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.



## mini-aiko 🖽

Mouth-blown glass is hand-etched in this modern twist on a traditional Japanese lantern. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	BR brown IV ivory OP opal		1B GY6.35 X LED LED mod	
model HS577	color <b>OP</b>	finish SC	lamp 1B	mount MRL
		BZ bronze SC satin nicke	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail








## mini-mason 🕮

A modern twist on an iconic shape. Rich transparent glass surrounds an opal glass diffuser. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM amber BR brown CR clear BU steel blue		1B GY6.35 X LED LED mod	dule 6w
HS574	BR	finish SC	1B	MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. 
\*\* Includes 4" Round Flush Canopy.



seguro pendants in amber

## seguro

Transparent glass with a crackle texture. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

AM amber AQ aqua BR brown CR clear GR olive green SM smoke


model color AQ

finish **SC** mount 1B35 MRL

BZ bronze SC satin nickel

FSJ fusion jack\*
MPT monopoint\*\*
MR2 2-circuit rail
MRL monorail

**1B35** GY6.35 Xenon 35w



PENDANTS 10W-voltage





 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.





bonn pendants in clear





## bonn 🖽

Transparent glass cone with hand-etched band. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM amber BR brown CR clear GR olive green SM smoke		<b>1B50</b> GY6.3: <b>LED</b> LED mod		Эw
model HS461	color <b>AM</b>	finish SC	1B50	mount MRL	
		BZ bronze SC satin nick	el	FSJ fusion MPT mon MR2 2-ci MRL mon	nopoint** rcuit rail



 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.



"-24" to item number.

model HS506	sm smoke color	finish <b>BZ</b>	1B35 GY6.35 lamp 1B35	mount MRL
	AM amber AQ aqua BR brown CR clear		Lana eye a	


FSJ fusion jack\*
MPT monopoint\*\*
MR2 2-circuit rail
MRL monorail BZ bronze SC satin nickel





AM

 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.

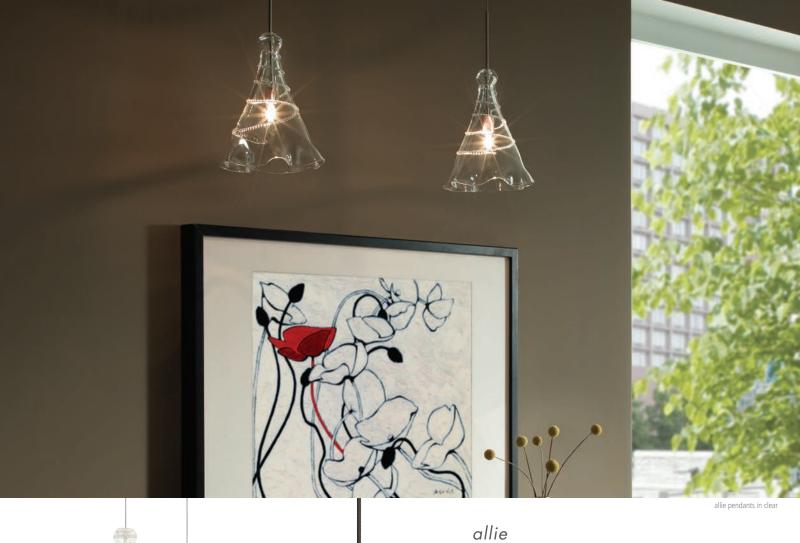

Delicate transparent cone-shaped glass shade with fluted bottom and decorative glass spiral topped with glass ball detail. Includes (1) 20 watt low-voltage G4 base Xenon bi-pin lamp.. For use with 24 volt transformer, add suffix "-24" to item number.

	BR brown CR clear GR olive gree	en	<b>1B20</b> G4 Xer	non 20w
model HS402	color <b>GR</b>	finish <b>BZ</b>	1B20	mount MRL
		<b>BZ</b> bronze <b>SC</b> satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



GR

BR

 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.

paperweight
Crystal blown sphere-shaped glass with flowing swirls of color. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24"  $\,$ to item number.

	AM amber BU blue OP opal		<b>1B35</b> GY6.35	5 Xenon 35w
model HS349	color <b>BU</b>	finish SC	1B35	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





## bullé

Crystal blown sphere-shaped glass with perfectly patterned bubbles. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BU blue CR clear		<b>1B35</b> GY6.35 Xenon 35w		
model HS348	color <b>AM</b>	finish SC	1B35	mount MRL	
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	





 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.



Cylia LED

Modern-shaped glass with an iridescent finish. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BU blue OP opal		<b>1B50</b> GY6.3! <b>LED</b> LED mod	
model HS472	color <b>BU</b>	finish SC	1B50	mount MRL
		BZ bronze SC satin nickel		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





# bling

Disc of transparent crystal with sandblasted interior and decorative metal accents. Includes (1) 10 watt low-voltage G4 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	CR clear		<b>1B10</b> G4 Xer	non 10w
model HS447	color CR	finish SC	1B10	MRL
		SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail




 $<sup>^{*}</sup>$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{**}$  Includes 4" Round Flush Canopy.



**lily** Mouth-blown transparent colored glass pendants, each unique and organic in shape. Includes (1) 20 watt low-voltage G4 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BL black OP opal RD red		<b>1B20</b> G4 Xe	non 20w
model HS378	color RD	finish SC	1B20	mount MRL
		BZ bronze PC polished chrome SC satin nickel		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





mini-lily
Mouth-blown transparent colored glass pendants, each unique and organic in shape. Includes (1) 10 watt low-voltage G4 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BL black OP opal RD red		<b>1B10</b> G4 Xe	non 10w
model HS509	color <b>AM</b>	finish <b>BZ</b>	1B10	MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail



 $<sup>^{*}</sup>$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{**}$  Includes 4" Round Flush Canopy.

## neutron 🖽

Sleek metal and acrylic cylinder enhanced by a punch of white or colored light. Includes low-voltage 6w LED MR16 lamp. Not dimmable. 12 volt only.

	CR clear		<b>SC</b> satir	n nickel	AM amber BU blue GR green RD red WH cool w WW warm	hite 5000K white 3000K
model HS390	color FR	glass length	finish SC	lamp	lamp color	mount MRL
		<b>16</b> 16"		1L LED MF	316	FSJ fusion jack* MPT monopoint MR2 2-circuit ra MRL monorail






## max 🖽

Glass cylinder with unique frit and special iris coating. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).



			1B50 GY6.35 Xenon 50w LED LED module 6w	
model HS170	TO color	finish <b>BZ</b>	1B50	MRL mount
		<b>BZ</b> bronze <b>SC</b> satin nicke	ēļ	FSJ fusion jack MPT monopoint** MR2 2-circuit rail MRL monorail





WH




 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.

## onyx 🖽

Genuine onyx available in cone, cylinder, dome and teardrop forms. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	ON onyx		<b>1B50</b> GY6.39 <b>LED</b> LED mod	
model	color	finish	lamp	mount
HS451	ON	BZ	1B50	MRL
		BZ bronze SC satin nickel		FSJ fusion jack* MPT monopoint**
HS177 dome HS178 teard				MR2 2-circuit rail MRL monorail

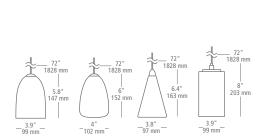



## mango coax nuage

Blown glass dome with nuage blown accents. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	MO mocha OP opal RD red		<b>1B50</b> GY6.3	35 Xenon 50w
model HS298	color RD	finish SC	1B50	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail






 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.

# coliseum 🖽

Cylinder comprised of natural alabaster tiles. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	BR brown NT natural OP opal	T natural		1B50 GY6.35 Xenon 50w LED LED module 6w	
model HS511	color BR	finish <b>BZ</b>	1B50	mount MRL	
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint* MR2 2-circuit rail	








NT


# rachel 🕮

Elegant Murano glass with organically-shaped pattern and accents of silver leaf. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	MOLT mocha/latte OPAM opal/amber		<b>1B50</b> GY6.35 Xenon 50w <b>LED</b> LED module 6w	
model HS455	color LTOP	finish SC	1B50	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint* MR2 2-circuit rail MRL monorail





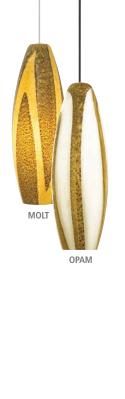

 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.



# wilt 🖽

Italian glass frosted with crystal clear accents. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	FR frost		LED LED module 6w	
model HS179	color <b>AM</b>	finish <b>BZ</b>	1B50	MRL
	BZ bronze SC satin nicke			FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





flurry Crisp resin cylinder with fine accents of onyx. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM oatmeal OP opal GR sage		1B50 GY6.35 Xenon 50w LED LED module 6w	
model HS452	color <b>GR</b>	finish <b>BZ</b>	1B50	mount MRL
	BZ bronze SC satin nickel		5	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



GR

 $<sup>^{*}</sup>$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{**}$  Includes 4" Round Flush Canopy.



gelato
Mouth-blown sphere of transparent colored glass and stripes of iris. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	BU blue CR clear		<b>1B50</b> GY6.3	5 Xenon 50w
model HS271	color <b>AM</b>	finish <b>BZ</b>	1B50	MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





mini-monty
Mouth-blown elliptical-shaped Murano glass with millefiore glass fusion and silver flakes. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	MO mocha OP opal RD red		<b>1B50</b> GY6.3 <b>LED</b> LED mod	
model HS338	olor OP	finish <b>BZ</b>	1B50	mount MRL
BZ bronze SC satin nick		el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	




 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.

# finestra

Slim organically-shaped glass with transparent windows. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	BL black AM caramel OP opal RD red		<b>1B35</b> GY6.3	5 Xenon 35w
model HS446	color <b>RD</b>	finish SC	1B35	mount MRL
		BZ bronze SC satin nickel		FSJ fusion jack* MPT monopoin MR2 2-circuit ra MRL monorail





# mini-pavia 🖽

Cone-shaped glass with silver leaf band. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM amber BR brown LT latte OP opal		<b>1B50</b> GY6.35	
model HS508	color BR	finish SC	1B50	mount MRL
·		BZ bronze SC satin nickel		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail









 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.





# icicle 🖽

Colorful frit and crystalline glass create these elegant mouth-blown shapes. Includes (1) 35 watt low-voltage GU4 base MR11 lamp or (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

			<b>1A35</b> MR11 Halogen 35w <sup>1</sup> <b>1B35</b> GY6.35 Xenon 35w <sup>2</sup> <b>LED</b> LED module 6w <sup>2</sup>		
model HS277	color CR	finish SC	1A35	mount MRL	
		BZ bronze SC satin nicke	el	FSJ fusio MPT mod MR2 2-c MRL mod	nopoint** ircuit rail

- 1 A35 lamping corresponds with BU and CR glass only.
   2 1B35 and LED lamping corresponds with AM and OP only.







# banja 🚥

Teardrop-shaped glass richly layered in multi-colored frit with subtle undertones of gold. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM dark amber IW ivory opaque		1B35 GY6.35 Xenon 35w LED LED module 6w	
model HS504	color <b>AM</b>	finish SC	1B35	MRL
		BZ bronze SC satin nicke	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options.
\*\* Includes 4" Round Flush Canopy.

# cone II

Mouth-blown cone-shaped pendants with multicolor frit combinations and inner borosilicate glass cone giving a diffused lamp appearance. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

SC satin nick			el	FSJ fusion jac	
HS341	color MC	finish SC	1B35	mount MRL	
	MC multicolor PB purple-blue		<b>1B35</b> GY6.35 Xenon 35w		
	BU blue BG blue-green				

MPT monopoint\*\*
MR2 2-circuit rail MRL monorail





# cone III 🖽

Mouth-blown cased glass cones. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

		SC satin nick	el	FSI fusion iacl
HS351	BU	finish SC	1B35	mount MRL
			1B35 GY6.35 Xenon 35w LED LED module 6w	
	AM amber		LABOR OVE D	F.V. 2F

MPT monopoint\* MR2 2-circuit rail MRL monorail



**120** PENDANTS LOW-VOLTAGE



 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.



top-si coax Mouth-blown transparent glass cylinder with inner borosilicate glass tube. Also available in opal-cased glass. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BU blue CR clear OP opal RD red		<b>1B50</b> GY6.3	5 Xenon 50w
model HS240	color <b>AM</b>	finish SC	1B50	mount MRL
		PC polished o		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



**sophia**Dome-shaped mouth-blown glass featuring creative texturing. Includes (1) 35 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber CR clear		<b>1A35</b> MR16	Halogen 35w
model	color	finish	lamp	mount
HS266	AM	BZ	1A35	MRL
		BZ bronze		FSJ fusion jack*
		SC satin nicke	el	MPT monopoint**
				MR2 2-circuit rail
				MRL monorail



AM

 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.





BU blue


ielly Italian mouth-blown Murano glass with real silver flakes and unique frit. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp.. For use with 24 volt transformer, add suffix "-24" to item number.

	MO mocha RD red		<b>1B50</b> GY6.3	5 Xenon 50w
model HS319	color <b>BU</b>	finish SC	1B50	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



neptune | Blown glass sphere with swirls of color. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BU blue OP opal RD red		<b>1B50</b> GY6.3!	
model	color	finish	lamp	mount
HS371	AM	SC	1B50	MRL
		<b>BZ</b> bronze <b>SC</b> satin nicke	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.



# daisy

Mouth-blown sphere with pink and gold or silver and blue reflective accents. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.



	BS blue	ne silver nk gold   <b>1B50</b> GY6.35 Xenon 50w			
model HS332	color <b>PG</b>	finish SC	1B50	mount MRL	
		BZ bro SC sat	in nickel	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	





# crystal ball

Bubbles and blown glass balls. Includes (1) 10 watt low-voltage G4 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM aml BU blue CR clear RD red		<b>1B10</b> G4 X	enon 10w
model HS264	color <b>AM</b>	finish <b>BZ</b>	1B10	mount MRL
		BZ broi SC sati		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



 $^{\star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.



## sam



Patterned blown glass with murrine combinations, in blue with green or caramel. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

			1B50 GY6.35 LED LED mod		72" 1828 mm		
model HS228	color <b>BU</b>	finish SC	1B50	mount MRL	7.5" 191 mm		
		BZ bronze SC satin nicke	el	FSJ fusion jack' MPT monopoir MR2 2-circuit r MRI monorail	t**		



Crystal clear elliptical-shaped Italian blown glass. Fluted and elegant. Includes (1) 50 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber CR clear		<b>1A50</b> MR16	Halogen 50w
model HS194	color CR	finish SC	lamp 1A50	mount MRL
		BZ bronze SC satin nicke	2	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





## lava I

When unlit glass appears silver, when illuminated, glass offers a warm tortoise shell finish. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "24" to item number.

	<b>TO</b> tortoise		<b>1B35</b> GY6.3	5 Xenon 35w
model HS305	TO color	finish <b>BZ</b>	1B35	MRL mount
		R7 hronze		FSI fusion jack*

SC satin nickel



MPT monopoint\*\* MR2 2-circuit rail MRL monorail



## lava II 🖽

When unlit glass appears silver, when illuminated, glass offers a warm tortoise shell finish. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	TO tortoise		<b>1B50</b> GY6.35 <b>LED</b> LED mod		72" 1828 mm
model HS309	color TO	finish <b>BZ</b>	1B50	mount MRL	5.1" 130 mm
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail	4.5" -114 mm

MRL monorail



## caroline 🖽

Mouth-blown pendant imbued with colorful frit accents. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM am BU blue OP opa	2	<b>1B50</b> GY6.35 Xenon 50w <b>LED</b> LED module 6w		72" 1828 mm
model HS267	color <b>BU</b>	finish SC	1B50	mount MRL	6-
		BZ bror SC satir		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	3.8" 95 mm



## leo 🖽

Opal and amber glass shade. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	AM amber		<b>1B50</b> GY6.35 Xenon 50w <b>LED</b> LED module 6w		
model	color	finish	lamp	mount	
HS326	AM	BZ	1B50	MRL	
		BZ bronze SC satin nickel		FSJ fusion jack*	
				MPT monopoint**	
				MR2 2-circuit rail	
				MRL monorail	



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.

### marmo

Organic arrangement of small clear glass beads and large blown glass balls. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp.. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber CR clear		<b>1B35</b> GY6.3	5 Xenon 35w
model	color	finish	lamp	mount
HS354	AM	BZ	1B35	MRL
		BZ bronze SC satin nicke	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail






## celeste

Celeste Swarovski crystal can be hung at various lengths to create a spectacular display and elaborate patterns on nearby surfaces. Optional colored LED MR16s available, making blue, green, yellow and red crystal stars possible. Includes (1) 50 watt low-voltage GU5.3 base constant CRI MR16 lamp.. For use with 24 volt transformer, add suffix "-24" to item number.

	AB prismatic CR clear		<b>1A50</b> MR16 Halogen 50w		
model HS159	color <b>AB</b>	finish SC	1A50	mount MRL	
		SC satin nicke PC polished of		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	

Optional LED MR16 colored lamps:

H890N-LED/AMBER H890N-LED/BLUE H890N-LED/GREEN H890N-LED/RED





<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. 
\*\* Includes 4" Round Flush Canopy.



# cuttle 🖽

Organic-shaped hand-cut opal and mocha Italian blown glass. Imbued with real silver flakes. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

	MO mocha		<b>LED</b> LED module 6w	
model HS181	color MO	finish <b>BZ</b>	1B50	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack MPT monopoi



MR2 2-circuit rail MRL monorail



 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.

bellboy ED Mouth-blown bell-shaped glass with genuine silver flake coating. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

			<b>1B35</b> GY6.35 Xenon 50w <b>LED</b> LED module 6w		
model HS264	color PR	finish SC	1B35	mount MRL	

BZ bronze FSJ fusion jack\* MPT monopoint\*\*
MR2 2-circuit rail **SC** satin nickel MRL monorail





belle 🖽

| AM amber

Italian mouth-blown Murano fluted shades imbued with complementing or multicolor frit combinations. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

		OP opal MC multicolor RD red		1B50 GY6.35 Xenon 50w LED LED module 6w	
	model HS180	olor <b>OP</b>	finish <b>BZ</b>	1B50	mount MRL
BZ bronze SC satin nicke		el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail		

MRL monorail








OP



# madeleine

Colorful frit and iris flute-shaped glass. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	BU blue PR purple RD red TO tortoise		<b>1B35</b> GY6.3	5 Xenon 35w
model HS268	color <b>RD</b>	finish SC	lamp 1B35	mount MRL
		BZ bronze SC satin nicke	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail
				13.5" 343 mm

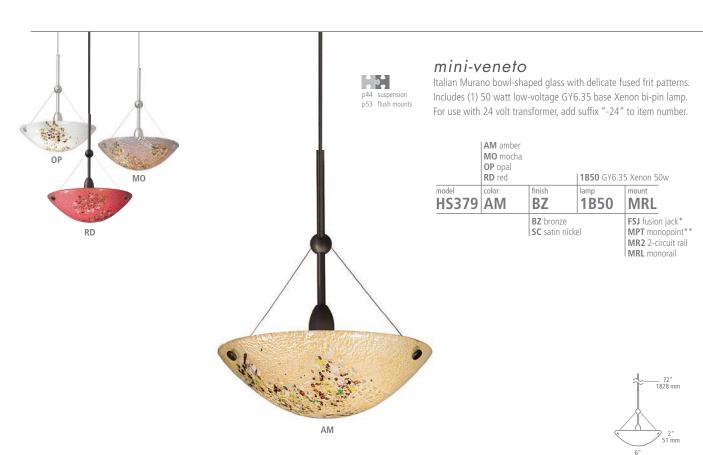

<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.

## vortex

Blown elliptical-shaped glass delicately wrapped with bands of colorful glass. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BU aqua blue RD red	2	<b>1B50</b> GY6.3!	5 Xenon 50w
model HS235	color RD	finish SC	1B50	mount MRL
		SC satin nick PC polished of		FSJ fusion jack* MPT monopoint MR2 2-circuit ra MRL monorail





**spencer**Mouth-blown transparent color wrapped with bands of crystal glass. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BU blue CR clear		<b>1B50</b> GY6.35	5 Xenon 50w
model HS284	color <b>AM</b>	finish SC	1B50	mount MRL
		SC satin nicke		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.



**stogie I**Mouth-blown tubes combining colored glass and a special iris treatment. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber OP opal RD red		<b>1B35</b> GY6.35	Xenon 35w
model HS269	color <b>AM</b>	finish <b>BZ</b>	1B35	mount MRL
		BZ bronze SC satin nicke	<u>e</u> l	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail







AM

**stogie II**Graceful tubes of colored glass and an iris treatment. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

AM (unlit)

AM amber BU blue **OP** opal RD red 1B50 GY6.35 Xenon 50w model mount HS270 RD SC 1B50 MRL

FSJ fusion jack\*
MPT monopoint\*\*
MR2 2-circuit rail
MRL monorail BZ bronze SC satin nickel



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. 
\*\* Includes 4" Round Flush Canopy.



## rocks

Large cube of crystalline glass. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	l cp. i		LABRE CVC N	5.V 25
	CR clear		<b>1B35</b> GY6.3	Xenon 35W
model	color	finish	lamp	mount
HS261	CR	BZ	1B35	MRL
		BZ bronze		FSJ fusion jack*
SC satin nic		SC satin nick	el	MPT monopoint**
				MR2 2-circuit rail





MRL monorail

## cube

Cube of frosted glass. Includes (1) 20 watt low-voltage G4 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber FR frost		<b>1B20</b> G4 Xe	non 20w	
model HS285	color <b>AM</b>	finish SC	1B20	mount MRL	72" 1828 mn
		SC satin nick	el	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	4.1" 104 mn - 2.3" – 57 mm

\* Fusion Jack canopies sold separately. See pages 270-275 for options. 
\*\* Includes 4" Round Flush Canopy.



# mini-dome II

Cased glass dome. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

p73	line-voltage pendants
p144	low-voltage pendants
p154	heads

	AM amber BU blue OP opal		<b>1B35</b> GY6.3	5 Xenon 35w
model HS275	color <b>AM</b>	finish SC	1B35	mount MRL
		BZ bronze SC satin nick	el	FSJ fusion jack* MPT monopoint MR2 2-circuit ra





## orbit

Solid reflector. Includes (1) 35 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.



		<b>1A35</b> MR16	Halogen 35w
model	finish	lamp	mount
HS273	SC	1A35	MRL
	BZ bronze		FSJ fusion jack MPT monopoir
	SC satin nick	el	MR2 2-circuit r
			MRL monorail






## rocket

Sleekly styled satin nickel steel shade. Includes (1) 35 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

<b>1A35</b> MR16			Halogen 35w
model HS265	finish SC	1A35	mount MRL
	SC satin nick	el	FSJ fusion jack* MPT monopoint* MR2 2-circuit rail MRL monorail





## hover

Floating glass disc with bronze or satin nickel plated body. Includes (1) 50 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

		<b>1A50</b> MR16	Halogen 50w
model	finish	lamp	mount
HS381	SC	1A50	MRL
	BZ bronze		FSJ fusion jack* MPT monopoint**
	SC satin nicke	el	MR2 2-circuit rail
			MRL monorail






## tubular

Borosilicate frosted glass tube. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp.. For use with 24 volt transformer, add suffix "-24" to item number.

	FR frost		<b>1B35</b> GY6.35 Xenon 35w	
model HS279	color <b>FR</b>	finish SC	1B35	mount MRL
		SC satin nicke		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail








## renée l 🖽

Sleek, styled opal glass pendant. Includes (1) 50 watt low-voltage GY6.35 base Xenon bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers).

			1B50 GY6.35 Xenon 50w LED LED module 6w	
model HS283	oolor <b>OP</b>	finish SC	1B50	mount MRL
		SC satin nick		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail





<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. 
\*\* Includes 4" Round Flush Canopy.

MRL monorail





# AM

# flow

Transparent blown glass cone with black or amber strands of colored glass. Includes (1) 50 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BL black		<b>1A50</b> MR16	Halogen 50w
model	color	finish	lamp	mount
HS377	RL	SC	1A50	MRL
		<b>BZ</b> bronze <b>SC</b> satin nick		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. 
\*\* Includes 4" Round Flush Canopy.





p182 wall

dimensions pendants in clear

# dimensions

Large optically pure crystal Swarovski elements elegantly illuminated by halogen light. Includes Includes (1) 35 watt low-voltage GU4 base MR11 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	CR clear   AM dark amber   AB prismatic multicolor			Halogen 35w	
model HS337	color <b>AM</b>	finish <b>BZ</b>	1A35	mount MRL	
		<b>BZ</b> bronze <b>SC</b> satin nicke	5	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	





 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.



vision pendants in clear

# vision

p183 wall

CR

AM

GR

Optically pure Swarovski crystal gems elegantly illuminated by halogen light. Includes (1) 35 watt low-voltage GU4 base MR11 lamp. For use with 24 volt transformer, add suffix "-24" to item number.

AB prismatic multicolor AM amber BU blue RD bordeaux **CR** clear GR green PR purple 1A35 MR11 Halogen 35w HS336 BU finish **BZ** mount 1A35 MRL BZ bronze SC satin nickel

FSJ fusion jack\*
MPT monopoint\*\*
MR2 2-circuit rail
MRL monorail



 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.

BU

lbllighting.com



tear-SI coax
Opal-cased glass enclosed in mouth-blown transparent teardrop shaped glass. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

	AM amber BU blue CR clear RD red		<b>1B35</b> GY6.3	Xenon 35w
model HS241	color <b>RD</b>	finish SC	1B35	MRL
		SC satin nick PC polished of		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail





### tear-SII coax 🖽

Mouth-blown teardrop shaped cased glass. Includes (1) 35 watt low-voltage GY635 base bi-pin lamp or 6 watt replaceable LED module. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option is not compatible with 24 volt transformers.)

	AV amber BU blue OP opal RD red		<b>1B35</b> GY6.3 <b>LED</b> LED mod	
model HS242	color	finish SC	lamp 1B35	mount MRL
		PC polished of SC satin nick		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail



 $<sup>^{*}</sup>$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{**}$  Includes 4" Round Flush Canopy.

### dome-SI coax

Opal-cased glass enclosed in mouth-blown transparent glass. Includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp. For use with 24 volt transformer, add suffix "-24" to item number.

p73 line-voltage pendants p136 low-voltage pendants p154 heads

AM amber BU blue CR clear RD red





#### mini-volo

Stainless steel cylindrical shade. Includes (1) 50 watt low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number.



		1A50 MR16	Halogen 50w
model	finish	lamp	mount
HS362	SS	1A50	MRL
	SS stainless s	FSJ fusion iad	

FSJ fusion jack\*
MPT monopoint\*\* MR2 2-circuit rail MRL monorail





<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. 
\*\* Includes 4" Round Flush Canopy.



#### tubes

p42 suspension p137 low-voltage pendants p202 bath Borosilicate glass tubes suspended on metal rods. Fixtures overall length is field-cuttable for shorter lengths. Please consult factory for custom lengths.

#### tube 1

Borosilicate glass tubes suspended on metal rods. Fixtures overall length is field-cuttable for shorter lengths. Please consult factory for custom lengths. Includes (1) 35 watt low-voltage GY6.35 base bi-pin lamp.

	FR frost		<b>1B35</b> GY6.3 Xenon 35w	
model	color	finish	lamp	mount
HS2931	FR	SC	1B35	MRL
	BL black** BZ bronze SC satin nicke			MPT monopoint MR2 2-circuit rail MRL monorail

#### tube 2

Borosilicate glass tubes suspended on metal rods. Fixtures overall length is field-cuttable for shorter lengths. Please consult factory for custom lengths. Includes (2) 35 watt low-voltage GY6.35 base bi-pin lamps.

	FR frost		<b>1B35</b> GY6.3	Xenon 2x35w
model	color	finish	lamp	mount
HS2932	FR	SC	1B35	MRL
	BL black** BZ bronze SC satin nicke			MPT monopoint MR2 2-circuit rail MRL monorail

### tube 3

Borosilicate glass tubes suspended on metal rods. Fixtures overall length is field-cuttable for shorter lengths. Please consult factory for custom lengths. Includes (3) 35 watt low-voltage GY6.35 base bi-pin lamps.

	FR trost		<b>1B35</b> GY6.3	Xenon 3x35w
model	color	finish	lamp	mount
HS2933	FR	BZ	1B35	MRL
		BL black** BZ bronze SC satin nicke		MPT monopoint MR2 2-circuit rail MRL monorail

 $<sup>\</sup>ensuremath{^{**}}$  Black option available only for monopoint mounting.





**swing** Art Deco-inspired head with multiple accessory options and proprietary 6 watt LED module. The screw base lamp module is easily replaced in the field, though it uses a dedicated base. The heat sink remains with the fixture minimizing any waste at the end of life. Rotates 360°, pivots 90°. Accessory required. Compatible accessories (sold separately, below): Mini-Rock Candy, Onyx Cone, Sigma, and Voti Accessories.

	<b>BZ</b> bronze		<b>03</b> 3" <b>06</b> 6"		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail***
	SC satin nic	ckel	<b>12</b> 12"		MRL monorail
model	finish	beam spread	length	lamp	mount
HD503	SC	25	03	LED	MRL
		<b>25</b> 25°		LED Mod	ule 6w
		<b>40</b> 40°			




with sigma

accessory

with onyx cone

accessory





<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. 
\*\* Includes 4" Round Flush Canopy.

## swing and vent accessories

#### voti accessory

Rounded frosted glass with integrated satin nickel or bronze lens holder. Can hold up to two lenses or louvers (sold separately). MR16 of up to 50 watts (not included).

	AM am BU blue FR fros	e	2" 51 mm 58 mm
model HAC482	color FR	finish <b>BZ</b>	30 11111
		BZ bronze	



### sigma accessory

Rounded metal shade. Can hold one lens or louver (sold separately). MR16 of up to 50 watts (not included).



	<b>BZ</b> bronze <b>SC</b> satin nickel
model	finish
<b>HAC479</b>	SC







#### mini-rock candy accessory Rounded shade of mouth-blown transparent glass rolled in

Rounded shade of mouth-blown transparent glass rolled in clear crystal frit and flash heated to create this unique texture. Can hold one lens or louver (sold separately). MR16 of up to 50 watts (not included).

	PR amethyst CR clear AM dark amber SM smoke BU steel blue	2.25" 57 mm 76 mm
model	color	
HAC606	SM	





### onyx cone accessory

Cone-shaped onyx shade. Can hold one lens or louver (sold separately). MR16 of up to 50 watts (not included).

	ON honey onyx	
model HAC481	color ON	1.8" 46 mm
		89 mm



#### modo 🖽

Can hold up to two lenses or louvers (sold separately). Includes (1) 50 watt Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers). Optional accessories (sold separately): Modo Glass Shield and Modo Metal Shield Accessories.

	BZ bror		FSJ fusion jack* MPT monopoint* MR2 2-circuit rail MRL monorail	
model HD474	finish <b>BZ</b>	stem 03	lamp 1A50	mount MRL
		03" 06" 12"	1A50 halog LED LED MR	en MR16 50w R16 6w



with modo amber

frost glass accessory



with modo blue glass accessory



#### modo accessories

# modo glass shield accessory Modern transparent or frosted glass shade. MR16 of up

to 50 watts (not included).

	AM amber AF amber fros BU blue BF blue frost CR clear FR frost
model	color
HAC478	FR





# modo metal shield accessory Modern metal shade. MR16 of up to 50 watts (not included).

<b>SC</b> satin nickel
finish
SC





<sup>\*</sup> Fusion Jack canopies sold separately. See pages for options. 
\*\* Includes 4" Round Flush Canopy.



### bare head swivel I

Bare MR16 lamp swivel head. Includes (1) 50 watt Constant CRI Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers). See p. 159 for optional accessories.

	BZ bro SC sati			FSJ fusion jack* MPT monopoint* MR2 2-circuit rai MRL monorail
model HBMR16	finish SC	stem 01	1A50	mount MRL
		01" 06" 12"	1A50 halog LED LED M	gen MR16 50w R16 6w





#### bare head swivel II

Bare MR16 lamp swivel head Includes (1) 50 watt Constant CRI Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers).

	BZ bro		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	
model HAMR16	finish <b>BZ</b>	stem 01	lamp 1A50	mount MRL
		01" 06" 12"	1A50 halog LED LED M	gen MR16 50w R16 6w





#### merlino swivel II 🖽

Frosted glass cylinder. Includes (1) 50 watt Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers).

	FR frost		01" str 06" str 12" st	raight	FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail
model HA300	color <b>FR</b>	finish SC	stem 01	1A50	mount MRL
		SC satin	nickel	1A50 halogen I LED LED MR16	



<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options.

\*\* Includes 4" Round Flush Canopy.

## shield swivel | 🖽

Shade in bronze, frosted borosilicate glass or anodized aluminum in silver or black. Includes (1) 50 watt Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers).



	BL blac	k	FSJ fusion jack*		
	BZ bror		01"		FSJ fusion jack* MPT monopoint**
	FR frost		06" 12"		MR2 2-circuit rail
	SI silver		12		MRL monorail
model	color	finish	stem	lamp	mount
HB295	BZ	BZ	01	1A50	MRL

BZ bronze 1A50 halogen MR16 50w LED LED MR16 6w





# bare head apollo swivel I LED Adjustable head rotates 360°, pivots 260° to direct the beam. Includes

(1) 50 watt Constant CRI Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers). See p. 159 for optional accessories.

	BZ bro		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	
model HDMR16	finish SC	stem 03	1A50	mount MRL
		03" 06" 12"	1A50 halog LED LED M	gen MR16 50w R16 6w





<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.



### mini-dome | swivel | 🖽

Small, elegant transparent glass. Includes (1) 50 watt Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers). See p. 159 for optional accessories.

HB325	color <b>AM</b>	finish <b>BZ</b>	stem 01	1A50	mount MRL
	AM am BL blac BU blue CR clea FR frost RO rose	k e r	01" 06" 12"		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail


BZ bronze 1A50 halogen MR16 50w LED LED MR16 6w





apex swivel ED
Swivels 360°; head tilts 210° in yolk. Includes (1) 50 watt Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. Holds up to two lenses or louvers (not included). For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers).

	BZ bror			FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail
model HD162	finish SC	stem 01	1A50	mount MRL
		01" 06" 12"	1A50 halogen LED LED MR16	







<sup>\*</sup> Fusion Jack canopies sold separately. See pages 270-275 for options. \*\* Includes 4" Round Flush Canopy.



# orbit swivel I 🖽

Satin nickel or bronze steel reflector. Includes (1) 50 watt Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers). See p. 159 for optional accessories.



	BZ bror		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	
model HB273	finish SC	stem 01	1A50	mount MRL
		01" 06" 12"	1A50 halog LED LED MI	gen MR16 50w R16 6w





puck swivel
Swivel head swivels 360° around stem and pivots 180°. Includes (1) 50 watt low-voltage AR111 lamp. (AR111 lamps are low-voltage halogen products ideal for display and accent lighting applications.) 12 volt only.

	<b>SC</b> sati	n nickel		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail
model HE437	finish SC	stem 03	1A50	mount MRL
		03" 06" 12"	1A50 halog	gen AR111 50w





 $<sup>^{\</sup>star}$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{\star\star}$  Includes 4" Round Flush Canopy.



twin spot swivel Each head pivots 340°, and the entire assembly rotates 360°. Includes (2) 35 watt Halogen or (2) 6 watt LED low-voltage GU5.3 base MR16 lamps. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers).

	BZ broi		MPT monopoint** MR2 2-circuit rail MRL monorail	
model HE382	finish <b>BZ</b>	stem 03	1A35	mount MRL
		03" 06" 12"	1A35 halog LED LED M	gen MR16 2x35 w R16 6w



Twin Snot Swv

# rev swivel 🖽

Swivels 360°; head tilts 90°. Includes (1) 50 watt Halogen or 6 watt LED low-voltage GU5.3 base MR16 lamp. For use with 24 volt transformer, add suffix "-24" to item number (LED lamp option not compatible with 24 volt transformers).

	BZ bro		FSJ fusion jack* MPT monopoint** MR2 2-circuit rail MRL monorail	
model HE441	finish <b>BZ</b>	stem 01	lamp 1A50	mount MRL
		01" 06" 12"	1A50 halog LED LED M	gen MR16 50w R16 6w





 $<sup>^{*}</sup>$  Fusion Jack canopies sold separately. See pages 270-275 for options.  $^{**}$  Includes 4" Round Flush Canopy.

#### head accessories

Accessories clip onto any bare MR16 lamp. Choose from a variety of colored, dichroic and diffuser lenses, or skip the lens altogether and specify one of the stylish, functional, lensless clips. All MR16 clips are available in black (BK) or silver (SI) finishes. To order, specify the accessory number.

### For use with single clips (MR16):

### colored/dichroic lenses









A01(BK,SI) Blue A02(BK,SI) Yellow

A03(BK,SI) Red A04(BK,SI) Green

# For use with louver lens holder (MR16):

### louver lens holders (MR16)

Holds up to two lenses/louvers. Includes suction cup for installation.







ALHDRMR16(BZ,BK,SI) Louver Lens Holder

### diffuser/spread lenses







A05(BK,SI) Grid A06(BK,SI) Stripe A07(BK,SI) Frost

### colored/dichroic lenses

for use with louver lens holders









ADICMR16BU Blue ADICMR16RD Red

ADICMR16GR Green ADICMR16YL Yellow

#### lenseless clips



A08(BK,SI) Structure clip

### structure louver

for use with louver lens holders



ASTRLMR16BK Structure Louver (Eggcrate)

### flite paper\*





FP11

**FP16** 

# diffusers, linear spread & soft focus lenses

for use with louver lens holders







ALENSMR16DF DIFFUSER
ALENSMR16LL LINEAR SPREAD
ALENSMR16SF SOFT FOCUS

 $<sup>^{\</sup>star}\,$  only compatible with bare head apollo swivel and bare head apollo swivel I.












# dahling wall ADA Complaint CF LED Metal base with translucent glass shade featuring soft frit



accents that transition from opal to gray. Mounts vertically only. Incandescent includes (1) E26 medium base 60 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant. 120v or 277v.

		GO grav	v-onal	for PW CF GX2 for LW	9 E26 60w only: 24Q-2 18w triple tube
type <b>JW</b>	model 622	color	finish <b>BZ</b>	lamp 2D	voltage
		BZ bron SC sati		1HE 120v 2HE 277v for PW only; for JW and LW leave blank	







## hollywood beach wall ADA ! III



Metal base with fabric shade featuring hand-crafted wire detail and opal glass diffuser. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant. 120v or 277v.

for JW only:

<b>TN</b> tan			Page 10 Per 10 P		
type <b>JW</b>	model 654	color	finish <b>BZ</b>	lamp 2D	voltage
JW incandescent PW compact fluorescent LW LED			BZ bro	nze	1HE 120v 2HE 277v for PW only; for JW and LW leave blank



## fiona wall ADA Compliant






Metal base with modern fabric shade. Mounts vertically only. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant 120 or 277v.

LI linen PB pebble PE pewter		for JW only: 2D A19 E26 75w for PW only: CF GX24Q-2 18w triple tube for LW only: LED LED module 10w		
type JW	model 681	color	lamp 2D	voltage
	ndescent npact fluo	1HE 120v 2HE 277v for PW only; for JW and LW leave blank		







П






#### sunkissed wall and compliant of the sunkissed








Metal base with a fabric shade and metal accents attached with acrylic tabs. Mounts vertically only. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant. 120v or 277v.









# zip wall ADA B CF LED








Metal base featuring a fabric shade highlighted with zipper details. Mounts vertically only. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant. 120v or 277v.


<b>BR</b> brown		for JW only: 2D A19 E26 75w for PW only: CF GX24Q-2 18w triple tube for LW only: LED LED module 10w		
type <b>PW</b>	model 663	color BR	Iamp voltage 1HE	
	ndescent npact fluo	1HE 120v 2HE 277v for PW only; for JW and LW leave blank		













þ

p30 suspension








Metal base with striped fabric drum and metal studs. Mounts vertically only. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. 120 or 277v.

<b>GY</b> gray		for JW only: 2D A19 E26 75w for PW only: CF GX24Q-2 18w triple tube for PW only: LED LED module 10w		
type <b>JW</b>	model 682	color <b>GY</b>	lamp <b>2D</b>	voltage
	indescent npact fluo	1HE 120v 2HE 277v for PW only; for JW		












accents. Mounts verticaly only. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant. 120v or 277v.

NT natural		for JW only: 2D A19 E26 75w for PW only: CF GX24Q-2 18w triple tube for LW only: LED LED module 10w		
type PW	model 658	color NT	lamp 2D	voltage 1HE
	ndescent npact fluo	1HE 120v 2HE 277v for PW only; for JW and LW leave blank		





cato wall ADA COMPILIANT CF LED





Metal base with fabric shade featuring pinking sheard seam detail. Mounts vertically only. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant. 120v or 277v.

1.f = ... IVA/ = ... Iv

			tor JW only: 2D A19 E26 75w for PW only: CF GX24Q-2 18w triple tube		
GY gray IV ivory			for LW only: LED LED module 10w		
type	model 656	color <b>GY</b>	lamp LED	voltage	
JW inca	andescent npact fluo	1HE 120v 2HE 277v for PW only; for JW and LW leave blank			

### oliver wall ADA compliant


**HW** halogen

Metal base with brass pulleys and minimal glass shade. Mounts up only. Includes (1) G9 base 60 watt halogen lamp. ADA compliant. 120v.



	<b>OP</b> opa		<b>2G</b> G9 60w
model <b>6681</b>		finish SC	2G

BZ bronze/brass PC polished chrome/brass SC satin nickel/brass






#### kett wall ADA compliant

Organic textured band with rectilinear glass shade. Mounts up only. Includes (1) G9 base 60 watt halogen lamp. ADA compliant. 120v.



		<b>OP</b> opa		<b>2G</b> G9 60w	
type	model	color	finish	lamp	
HW	6691	OP	SC	2G	
HW halogen			BZ bronze		
			PC polished chron		
			SC satir	nickel	





jada wall ADA compliant
Minimal modern base with glass cylinder shade. Mounts up only. Includes (1) G9 base 60 watt halogen lamp. ADA compliant. 120v.



		OP opal		<b>2G</b> G9 60w
type <b>HW</b>	model <b>6701</b>	color <b>OP</b>	finish SC	lamp 2G
HW halogen			BZ bron PC polis SC satir	shed chrome



wall projection 4" / 102 mm





with mini-indulgent pendant in opal (sold separately, on p. 86)

6" 153 mm


ona wall canopy ED
Versatile canopy that instantly transforms most Fusion Jack Low-Voltage Pendants into a wall sconce. Includes 5" and 6" length rods to accomodate a wide variety of shade sizes. This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included). Includes low-voltage electronic transformer.

		120v IN/12v OUT -277 277v IN/12v OUT -LED 120v IN/12v LED OUT -LED277 277v IN/12v LED OUT
type CW001S	finish SC	type
	BZ bron	

## compatible dimmers

type	dimmer (not included)
120v IN/12v OUT	120v incandescent
277v IN/12v OUT	277v incandescent
120v IN/12v LED OUT	120v low-voltage electronic
277v IN/12v LED OUT	277v low-voltage electronic





wall projection 3.8" / 100 mm

### showtime wall and compliant of the showtime wall







Minimal curved glass shade with a modern base. Mounts up only. Incandescent includes (1) E26 medium base 60 watt or equivalent BT15 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant. 120v or 277v.

		<b>OP</b> opal	l glass	for PW CF GX2 for LW	15 É26 60w only: 24Q-2 18w triple tube
type <b>JW</b>	model 632	color <b>OP</b>	finish SC	lamp 2D	voltage
JW incandescent			BZ bron SC sati		1HE 120v 2HE 277v for PW only; for JW and LW leave blank












mojave wall ADA Organic dome-shaped frosted glass hand-worked with decorative silver leaf. Fluorescent includes (1) 18 watt GU24 base self-ballasted compact fluorescent lamp; Incandescent accepts (1) 75 watt or equivalent E26 medium base A19 lamp (not included). 120V.

		AM am		for JW only: <b>2D75</b> A19 E26 75v for PW only: <b>18GU</b> GU24 18w
type <b>JW</b>	model <b>483</b>	color <b>FR</b>	finish SC	2D75
	JW incandescent PW compact fluorescent			nze n nickel









mounted horizontally or vertically. Fluorescent includes (1) G24Q-3 base 26 watt quad tube compact fluorescent lamp; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant.

		<b>TN</b> tan		for LW or	)-3 26w quad tube
type PW	model 666	color TN	finish NR	CF	voltage 1HE
PW cor	mpact fluc	prescent	NR natu	ural raw	1HE 120v 2HE 277v for PW only; for LW leave blank



FR



wall projection 4" / 102 mm




# mini-rock candy cylinder wall CF Cylinder of mouth-blown transparent glass rolled in clear crystal frit and

Cylinder of mouth-blown transparent glass rolled in clear crystal frit and flash heated to create this unique texture. Inner opal glass diffuser adds depth to the wall sconce. Incandescent includes (1) G9 base 60 watt halogen lamp; fluorescent includes (1) G24Q-3 base 26 watt quad tube compact fluorescent lamp. 120 or 277v. ADA compliant. 120v or 277v.

		PR amethys	t		
		CR clear		for HW or	nly:
		AM dark am	nber	<b>2G</b> G9 60	)w
		SM smoke		for PW or	nly:
		BU steel blu	е	<b>CF</b> G24Q	-3 26w quad tube
type <b>PW</b>	model 623	BU	finish SC	lamp <b>CF</b>	voltage 1HE
HW hald PW com	ogen ipact fluo	rescent	BZ bronz SC satin		1HE 120v 2HE 277v for PW only; for HW leave blank







wall projection 3.9" / 99 mm








mini-isis cylinder wall and compliant Streams of thick glass piping formed into a glass cylinder. May be mounted up or down. Includes (1) G9 base 60 watt halogen lamp. 120v.

		AM am AQ aqu CR clea	ia		
		SM sm	oke	<b>2G</b> G9	
type	model	color	finish	lamp	watts
HW	545	AQ	BZ	2G	60
<b>HW</b> hal	ogen		BZ broi SC sati		<b>60</b> 60w







omni with cover small wall complain of the Minimal wall sconce with extruded aluminum housing and die-cast end caps. Features slumped glass, fabric, and metal shade options for optimal design p210 outdoor flexibility. Mounts vertically only. Incandescent includes (1) E26 medium base 60 watt or equivalent BT15 halogen lamp; fluorescent includes (1) 2G10 base 18 watt flat quad tube compact fluorescent lamp and electronic ballast; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant. 120 or 277v.



197 mm wall projection 3.9" / 99 mm

9.25" 235 mm



bubble glass BBR brown smoke **BBU** blue BOP opal BAM dark amber BGR green horizontal carved glass\*

**HFR** frost

fabric FLI linen **2D** BT15 E26 60w 120v (JW only) **CF1HE** 2G10 18w flat quad tube 120v (PW only)

FPE pewter metal\* MET meta

CF2HE 2G10 18w flat quad tube 277v (PW only) LED LED module 10w 120v (LW only)

LED277 LED module 10w 277v (LW only)

JW	559	FLI	SI	2D
type	model	color	finish	lamp

PW compact fluorescent | SI silver

BZ bronze

LW LED

















<sup>\*</sup> Horizontal Carved Glass and Metal not available with incandescent lamp.









omni with cover medium wall applied to the control with extruded aluminum housing and die-cast end caps. p211 outdoor Features slumped glass, fabric, and metal shade options for optimal design flexibility. Mounts vertically only. Incandescent includes (2) E26 medium base 60 watt or equivalent BT15 halogen lamps; fluorescent includes (1) 2G11 base 24 watt twin tube compact fluorescent lamp and electronic ballast. Fluorescent version may also be lamped with (1) 2G11 base 27 watt twin tube compact fluorescent lamp (not included). ADA compliant. 120 or 277v.

		bubble gi BBR brov BBU blue BOP opa BAM dar BGR gree horizonta HFR frost fabric FLI linen FPE pew metal*	vn smok e l k amber en il carved t	glass*	5 E26 2x60w (JW only)
type	model	MET met	finish	lamp	1 24w twin tube (PW only) voltage
ĴW	561		SI	2D	1HE
	ndescent npact fluo	rescent	BZ bron SI silve		1HE 120v 2HE 277v for PW only; forJW

<sup>\*</sup> Horizontal Carved Glass and Metal not available with incandescent lamp.










p118 low-voltage pendants



pavia wall CF Grand cone-shaped glass with silver leaf accents. Fluorescent includes (1) 36 watt 2G11 base twin tube compact fluorescent lamp and electronic ballast; Incandescent includes(1) 60 watt or equivalent E26 medium base BT15 halogen lamp. 120V.

		LT latte OP opa		<b>2D60</b> BT15 E26 60w (JW only) <b>139</b> 2G11 36w twin tube (PW only)
type PW	model 484	color	finish SC	139
	andescent npact fluore	escent	BZ broi SC sati	





OP



# bora wall ADA Compliant CF






Sleek organic-shaped Murano glass form beautifully illuminated by incandescent, compact fluorescent or LED light. Fluorescent includes (1) 18 watt G24Q-2 base guad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included); LED includes (1) 10 watt replaceable 2700K LED modle. 120V or 277V.

				2D100 A19 E26 100w 120v (JW only)
				18Q1HE G24Q-2 18w quad tube 120v (PW only)
				18Q2HE G24Q-2 18w quad tube 277v (PW only)
		AM am	ber	LED LED module 10w 120v
		<b>OP</b> opa	l	LED277 LED module 10w 277v
эе	model	color	finish	lamp

PW AP10 AM SC 18Q1HE SC satin nickel JW incandescent

PW compact fluorescent LW LED





onyx wall Genuine onyx available in cylinder, dome and teardrop shapes. Includes (1) 60 watt G9 base Halogen lamp. 120v.


		ON ony	X	<b>2G</b> G9	
type <b>HW</b>	model <b>177</b>	olor	finish <b>BZ</b>	lamp <b>2G</b>	watts 60
HW176 cylinder HW177 dome HW178 teardrop			BZ bror SC sati		<b>60</b> 60w













max wall ADA compliant

102 mm

wall projection 7.3" / 184 mm

Glass cylinder with unique frit and special iris coating. Includes (1) 60 watt G9 base Halogen lamp. 120V.



		RD red				
		TO torto	oise	<b>2G</b> G9		
type	model	color	finish	lamp	watts	
HW	170	TO	BZ	2G	60	
HW halogen			BZ bronze SC satin nickel		<b>60</b> 60w	








#### wilt wall

Amber Italian glass frosted with crystal clear amber accents. Includes (1) 60 watt G9 base Halogen lamp. 120v.

		AM am FR frost		<b>2G</b> G9	
type <b>HW</b>	model <b>179</b>	color <b>AM</b>	finish <b>BZ</b>	lamp <b>2G</b>	watts
HW halogen			BZ bronze SC satin nickel		<b>60</b> 60w



wall projection 7.5" / 191 mm









## aliseo ADA Compliant CF



Mouth-blown Murano glass wall sconce. Fluorescent includes (1) 18 watt G24Q-2 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (2) 40 watt or equivalent E12 candelabra base B10 lamps (not included). 120V or 277V.

		OP whi	te	for PW o	É12 2x40w
type PW	model AP13	color <b>OP</b>	finish SC	lamp 18Q	voltage 1HE
	indescent npact fluores		SC sati		for PW only: 1HE 120v 2HE 277v for JW, leave blank






### icicle wall ADA compliant



Colorful frit and crystalline glass create these elegant mouth-blown shapes with complementary glass ball accent. Includes (1) 60 watt G9 base Halogen lamp. 120v.

		AM amber			
		OP opal		<b>2G</b> G9	
type <b>HW</b>	model 277	color <b>AM</b>	finish SC	lamp <b>2G</b>	watts
HW halogen			BZ bronze SC satin nickel		<b>60</b> 60w










## athena wall ADA Compliant CF





Cased glass with solid brass accents. Fluorescent includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 60 watt G9 base halogen lamp. 120v.

		<b>OP</b> opa	I	<b>2G60</b> G9 60w <b>13QHE</b> G24Q-1 13w quad tube
type <b>HW</b>	model <b>5498</b>	color <b>OP</b>	finish PC	2 <b>G60</b>
				n nickel shed brass shed chrome












wall projection 5" / 127 mm

sophia wall Dome-shaped mouth-blown glass featuring creative texturing. Fixture can be mounted up or down. Includes (1) 40 watt G9 base Halogen lamp. 120V.

		AM am CR clea		<b>2G</b> G9	
type <b>HW</b>	model 266	color	finish SC	lamp <b>2G</b>	watts 40
HW halogen			BZ bronze 40 4		<b>40</b> 40w






### metro wall

Cone-shaped glass wall sconce. Includes (1) 60 watt G9 base Halogen lamp. 120V.

		<b>AM</b> am <b>OP</b> opa		<b>2G</b> G9	
type <b>HW</b>	model 223	color <b>AM</b>	finish <b>BZ</b>	lamp <b>2G</b>	watts
HW halogen			BZ bronze 60 60 SC satin nickel		<b>60</b> 60w








daisy wall Mouth-blown spheres with pink and gold or silver and blue reflective accents. Includes (1) 60 watt G9 base Halogen lamp. 120v.

		BS blue PG pin		<b>2G</b> G9	
type <b>HW</b>	model 332	color <b>PG</b>	finish SC	lamp 2G	watts
<b>HW</b> hal	ogen		BZ bro SC sati		<b>60</b> 60v

### casino one wall

Hand-blown rectangular opal cased glass with modern square arm and backplate. Includes (1) 60 watt G9 base Halogen lamp. 120v. Fixture can be mounted up or down.

		<b>OP</b> opa		<b>2G</b> G9	
type <b>HW</b>	model 310	color <b>OP</b>	finish SC	lamp <b>2G</b>	watts 60
HW halogen			BZ bronze		<b>60</b> 60w








### casino two wall

Hand-blown rectangular opal cased glass with modern square arm and backplate. Includes (1) 60 watt G9 base Halogen lamp. 120v. Fixture can be mounted up or down.

		OP opal		<b>2G</b> G9	
type <b>HW</b>	model 3102		finish <b>BZ</b>	lamp <b>2G</b>	watts
			BZ bronze SC satin nickel		<b>60</b> 2x60w






wall projection 6" / 152 mm






top wall GF Tubular glass wall sconce. Fluorescent includes (1) 13 watt 2GX7 base twin tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 40 watt G9 base halogen lamp. 120v

		FR frost		for HW only: 2G40 G9 40w for PW only: PL13 2GX7 13W twin tube
type <b>HW</b>	model 2930	color <b>FR</b>	finish BZ	2G40
HW halogen PW compact fluorescent			BZ bro	shed chrome



wall projection 4.5" / 114 mm

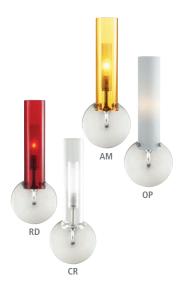




top wall II ADA B. Complain Cr.
Mouth-blown glass cylinder with borosillicate internal glass diffuser (except on opal). Fixture can be mounted up or down. Fluorescent includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Xenon includes (1) 35 watt low-voltage GY6.35 base Xenon bi-pin lamp and 75 watt mini-electronic transformer.12v.

			AM am	ber		
BU bl		<b>BU</b> blue		for HW only:		
C		CR clea	r	<b>1B35</b> GY6.35 35w		
OP opa		OP opa		for PW only:		
RD red			<b>13QHE</b> G24Q-1 13W quad tube			
	type	model	color	finish	lamp	
	HW	240	BU	SC	1B35	
HW halogen (all but opal)		BZ bror	nze			
PW compact fluorescent		PC polished chrome				
(onal only)		SC satin nickel				



wall projection 3" / 76 mm

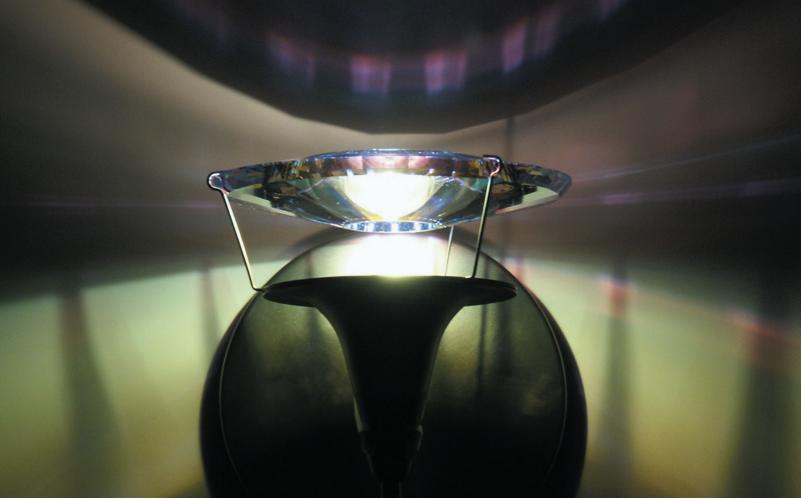

dimensions wall in clear

### dimensions


Large optically pure crystal Swarovski elements elegantly illuminated by halogen light. Fixture can be mounted up or down. Includes (1) 35 watt low-voltage GU4 base MR11 lamp and 75 watt mini-electronic transformer supplied. 12v.







		AM am	r		
		AB prist	matic multicolor	<b>1A</b> MR11	
type <b>HW</b>	model 337	color CR	finish <b>BZ</b>	lamp 1A	watts
			<b>BZ</b> bronze <b>SC</b> satin nickel		<b>35</b> 35w








vision wall in amber













### vision




Optically pure Swarovski crystal gems elegantly illuminated by halogen light. Fixture can be mounted up or down. Includes (1) 35 watt low-voltage GU4 base MR11 lamp and 75 watt mini-electronic transformer supplied. 12v.

		AM am BU blue RD bord CR clea GR gree PR lave	deaux r en			
		AB pris	matic multicolor	1A MR11		
type <b>HW</b>	model 336	color CR	finish SC	lamp 1A	watts	
<b>HW</b> hal	ogen		BZ bronze SC satin nickel		<b>35</b> 35w	



### taitu ADA Compliant CF

Murano mouth-blown wall sconce beautifully illuminates the elegant combination of opal glass with crystal glass draw. Fluorescent includes (1) 13 watt G24Q-1 base guad tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 100 watt R7S base 118mm double-ended halogen lamp. 120v or 277v.

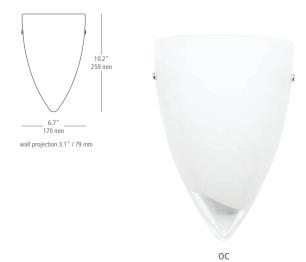

### linear wall ADA Compliant CF LED








Mouth-blown glass. Fluorescent includes (1) 13 watt 2GX7 base twin tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 60 watt G9 base halogen lamp; LED includes (1) 10 watt replaceable 2700K LED module. 120v or 277v.



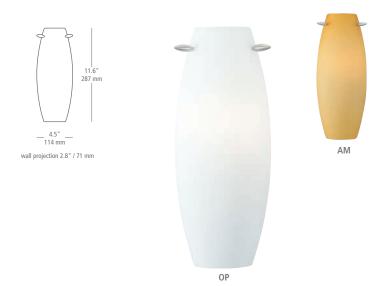

### tear drop wall ADA COMPILATE CF

LW LED








Beautifully illuminated hand-blown glass. Fluorescent includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 60 watt G9 base halogen lamp; LED includes (1) 10 watt replaceable 2700K LED module; 120v or 277v.

> for HW only: **2G60** G9 60w 120v for PW only: **13Q1HE** G24Q-1 13w quad tube 120v **13Q2HE** G24Q-1 13w quad tube 277v for LW only: **LED** LED module 10w 120v

**OP** opal LED277 LED module 10w 277v model color finish lamp HW 4601 OP SC 2G

**HW** halogen PW compact fluorescent LW LED


SC satin nickel











mistral wall ADA Compliant CF




Classic blown Murano glass wall sconce. Fluorescent includes (1) 18 watt G24Q-2 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included). 120V or 277V.

		AM am OP opa	ber	for PW o	19 E26 100w nly: 1Q-2 18w
type PW	model AP14	color <b>OP</b>	finish SC	lamp 18Q	voltage 1HE
	npact fluores andescent	scent	<b>SC</b> sati	in nickel	for PW only: 1HE 120v 2HE 277v for JW and HW, leave blank












tulip wall ADA B CF Hand-blown glass. Fluorescent includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 60 watt G9 base halogen lamp. 120v or 277v.

<b>AM</b> a   <b>OP</b> op				for HW only: <b>2G60</b> G9 60w for PW only: <b>13Q</b> G24Q-1 13W quad tube	
type <b>HW</b>	model <b>3783</b>	olor OP	finish SC	2G60	voltage
HW halogen PW compact fluorescent			BZ bronze SC satin nickel		for PW only: 1HE 120v 2HE 277v for HW, leave blank









line-voltage pendants



monty wall ADA B Complant CF
Mouth-blown Murano glass with millefiore glass fusion and silver flakes. Fluorescent includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 60 watt G9 base halogen lamp. 120v.


HW halogen			scont	BZ bron	
	type <b>HW</b>	model 936	color MO	finish SC	1amp <b>2G60</b>
			RD red		<b>13Q</b> G24Q-1 13W quad tube
			<b>OP</b> opal		for PW only:
			MO mo	cha	<b>2G60</b> G9 60w
			<b>BU</b> blue		for HW only:


### iris wall



Mouth-blown glass. Fluorescent includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Halogen includes (1) 100 watt R7S base 78mm double-ended halogen lamp; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included). 120V or 277V.

				for HW only: 2M100 R75 100w double-ended halogen 78mm for JW only: 2D100 E26 100w for PW only: 213 G24Q-1 2x13w quad tube		
type PW	model AP11	color OP	finish SC	lamp	voltage 1HE	
			<b>SC</b> sati		for PW only: 1HE 120v 2HE 277v for JW and HW, leave blank	

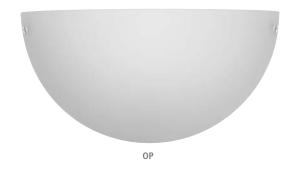



wall projection 5" / 172 mm






juniper wall ADA Schaffer Slumped glass with organic vertical sandblasted pattern. Fluorescent 13w Quad includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 18w Quad includes (2) 18 watt G24Q-2 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included). 120V or 277V.



<b>OP</b> opa				for PW o 213 G24	119 E26 100w
type PW	model 230	color <b>OP</b>	finish SC	lamp <b>213</b>	voltage 1HE
	andescent npact fluore:	scent	SC sati	in nickel	for PW only  1HE 120v  2HE 277v  for IW leave blank









stingray venus ADA Compilent CF
Cased Murano glass. Fluorescent 13w Quad includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballasts and electronic ballast; Fluorescent 18w Quad includes (2) 18 watt G24Q-2 base quad tube compact fluorescent lamps and electronic ballasts and electronic ballast; Fluorescent 26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballasts and electronic ballast; Incandescent accepts (2) 40 watt E26 medium base T10 lamps (not included).

		AM am OP opa		for PW on 1HE 120v 2HE 277v for JW, lea	, ,	
type <b>PW</b>	model <b>6026</b>	color <b>AM</b>	lamp <b>213</b>	voltage 1HE	wet location	
	ndescent npact fluore:	scent	213 2xG24Q-1 13W quad tube 218 2xG24Q-2 18w quad tube 226 2xG2 -3 26W quad tube 240 2xT10 E26 2x40w			





AM



wall projection 3.9" / 99 mm




Soft flowing curves of powder coated aluminum offer a wide variety of looks to complement any environment.

See these other Stingray options on pp. 213-214.












presidio wall Perforated sconce creates beautiful light pattern up and down the wall. Fluorescent 13w Quad includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 18w Quad includes (2) 18 watt G24Q-2 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Halogen includes (1) 100 watt R7S base 118mm double-ended halogen lamp. 120v or 277v.

		B black S stainle W white		for PW only: <b>1HE</b> 120v <b>2HE</b> 277v for HW, leave blank	S standard T tamper resistant		
type <b>PW</b>	model 614	finish <b>S</b>	lamp <b>213</b>	voltage 1HE	screw <b>S</b>		
HW hal PW con	ogen npact fluore:	scent	for HW only: 100 R7S 100w double-ended halogen 118mm for PW only: 213 G24Q-1 2x13 quad tube 218 G24Q-2 2x18 quad tube 226 G24Q-3 2x26 quad tube				

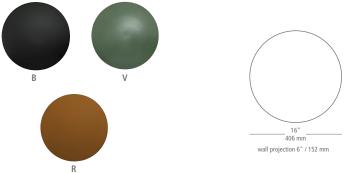




### eclipse ADA Compliant CF

þ

Wall-washing aluminum disc also available for wet location. Fluorescent includes (3) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballasts; Incandescent accepts (3) 60 watt E26 medium base A19 lamps (not included). 120v or 277v.

		B black C chrome coat R rust V verde		for PW only: 1HE 120v 2HE 277v for JW, leave blank	
type PW	model 612	finish C	lamp 313	voltage 1HE	
	indescent npact fluore	scent	<b>360</b> A19 E26 3x60w <b>313</b> G24Q-1 3x13 quad tube		





### mono-tel

Telescoping and multi-function adjustability. 75 watt mini-electronic transformer that neatly fits in most electrical boxes. Halogen 35w includes (1) 35 watt low-voltage GU5.3 base constant CRI MR16 lamp; Halogen 50w includes (1) 50 watt low-voltage GU5.3 base constant CRI MR16 lamp. 12v. See p. 159 for optional accessories.

		<b>1A</b> MR16		MPT monopoint
model	finish	lamp	watts	mount
HPTEL	SC	1A	50	MPT
	SC satin nickel		50	
			35	



### mono-arc

Gently curved arc in bronze or satin nickel finish. 75 watt mini electronic transformer that neatly fits in most electrical boxes. Halogen 35w includes (1) 35 watt low-voltage GU5.3 base constant CRI MR16 lamp; Halogen 50w includes (1) 50 watt low-voltage GU5.3 base constant CRI MR16 lamp. 12V. See p. 159 for optional accessories.

	<b>1A</b> MR16		MPT monopoint	
model	finish	lamp	watts	mount
HPARC	BZ	1A	50	MPT
	BZ bronz		50	
	SC satin nickel		35	





þ


shield galleria Shade in architectural bronze, frosted borosilicate glass or anodized aluminum in silver or black. Monopoint mount. Includes (1) 50 watt low-voltage GU5.3 base MR16 lamp.

	BL blac BZ bror FR frost SI silver	ize	1A MR16   MPT monopoi			
model GHB295	color <b>BZ</b>	finish <b>BZ</b>	lamp 1A	watts <b>50</b>	mount MPT	
		BZ bron		50		












kett 3-light bath Compliant
Organic textured band with rectilinear glass shades. Mounts up only. Includes (3) G9 base 60 watt halogen lamps. ADA compliant. 120v.

		<b>OP</b> opa	l	<b>2G</b> G9 3x60w
type	model		finish	lamp
HW	6693	OP	SC	2G
HW hal	ogen		BZ bron: PC polis SC satin	hed chrome



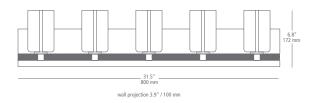




kett 5-light bath ADA compliant
Organic textured band with rectilinear glass shades. Mounts up only. Includes (5) G9 base 60 watt halogen lamps. ADA compliant. 120v.

		<b>OP</b> opa		<b>2G</b> G9 5x60w
type <b>HW</b>	model <b>6695</b>	color <b>OP</b>	finish SC	amp <b>2G</b>
HW hal	ogen		BZ bron: PC polis SC satin	hed chrome







jada 5-light bath Compilant Minimal modern base with glass cylinder shades. Mounts up only. Includes (5) G9 base 40 watt halogen lamps. ADA compliant. 120v.

		<b>OP</b> opa		<b>2G</b> G9 5x40w
type	model	color	finish	lamp
HW	6705	OP	SC	2G
HW hal	ogen		BZ bron: PC polis SC satin	hed chrome



# wall projection 4" / 101 mm

# jada 7-light bath omplant Minimal modern base with glass cylinder shades.




Mounts up only. Includes (7) G9 base 40 watt halogen lamps. ADA compliant. 120v.

		<b>OP</b> opa		<b>2G</b> G9 7x40w
type <b>HW</b>	model <b>6707</b>	color <b>OP</b>	finish SC	2G
HW hal	ogen		BZ bron: PC polis SC satin	hed chrome





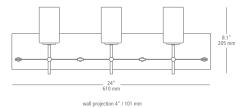


oliver 3-light bath complete.

Metal base with brass pulleys and minimal glass shades. Mounts up only. Includes (3) G9 base 60 watt halogen lamps. ADA compliant. 120v.

		<b>OP</b> opa		<b>2G</b> G9 3x60w
type	model	color	finish	lamp
HW	6683	OP	SC	2G
HW hal	<b>HW</b> halogen			ze/brass hed chrome/brass nickel/brass



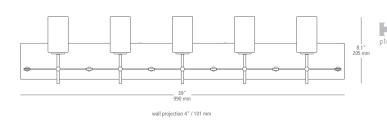


# oliver 5-light bath ADA compliant Metal base with brass pulleys and minimal glass



shades. Mounts up only. Includes (5) G9 base 60 watt halogen lamps. ADA compliant. 120v.

				<b>2G</b> G9 5x60w
type <b>HW</b>	model <b>6685</b>	color <b>OP</b>	finish SC	2G
HW hal	ogen			ze/brass hed chrome/brass nickel/brass



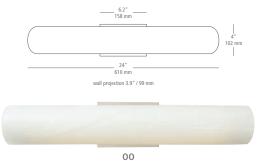


### mia bath ADA Compliant CF





Floating crescent of multi-layered case glass in opal alone, or opal with a soft ribbon of color. May be mounted horizontally or vertically. Fluorescent includes (2) 14 watt mini bi-pin base T5 linear fluorescent lamps and electronic ballast; Halogen includes (4) 60 watt E11 minicandelabra base krypton lamps. 120 or 277v.

		OO opa			60w minican (HW only) bi-pin 2x14w (PW only)
type <b>HW</b>	model 486	color <b>OA</b>	finish SC	2J60	voltage
HW hal	ogen npact fluore	escent	SC satin	nickel	PW only 1HE 120v 2HE 277v for HW. leave blank

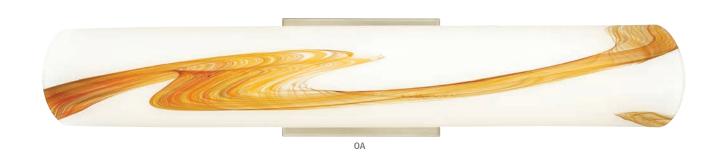


# \_\_ 36" \_ 915 mm wall projection 3.5" / 88 mm

### final call medium bath ADA



Sleek bath bar with metal base and opal acrylic. May be mounted horizontally or vertically. Includes (1) mini bi-pin base 39 watt T5 high output linear fluorescent lamp. ADA compliant. 120 or 277v.

		<b>OY</b> opa	l acrylic	<b>CF</b> T5H0	) mini bi-pin 39w
type <b>PW</b>	model 674	color <b>OY</b>	finish SC	CF	voltage 1HE
PW fluc	prescent		BZ bron		1HE 120v

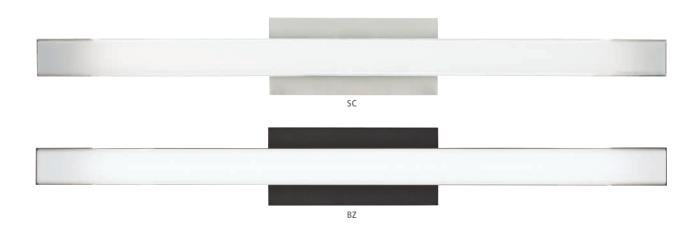



twin tube head bath kit in bronze

### twin tube bath installation kit

This innovative and contemporary Monorail lighting system offers the ideal combination of direct and ambient lighting for any bathroom mirror application.

### Each kit consists of:

(1) 36" Monorail

(3) Low-voltage Twin Tube Heads

(2) Rigid standoffs

(1) Set of endcaps

(1) Remote canopy and power feed combination

(1) 75w electronic transformer (when ordered with 10W lamps)

(1) 150w remote electronic transformer

(when ordered with 20w lamps)

Canopy Option: Typically, a 4" canopy is specified with this kit, but LBL also offers a special 2.75" canopy and corresponding 2" electrical box for a sleeker look. Both 2" and 4" electrical box sizes can house the 75w miniature transformer, but an accessible remote location is required for the 150w remote electronic transformer (comes with kits specifying 20w lamps). A good example of a remote location for this application would be the interior of a bath vanity. Consult factory for custom lengths.








Additional Twin Tube Head for Monorail Bath Kit. Includes (2) 20 watt low-voltage G4 base bi-pin lamps.

### Additional heads:

		BZ bron	ze	10 6x10	)w					BZ bron	ze	10 2x10	)w
TB tube		<b>SC</b> satin	nickel	<b>20</b> 6x20	)w			TB tube	1	<b>SC</b> satin	nickel	<b>20</b> 2x20	)w
head <b>TB</b>	color <b>FR</b>	finish SC	lamp 1B	watts	canopy <b>04</b>		model HBTWN	head <b>TB</b>	color <b>FR</b>	finish SC	lamp 1B	watts 10	mount MRL
	FR frost		<b>1B</b> G4		<b>02</b> 2" ca	anopy			FR frost		<b>1B</b> G4		MRL monora



### dover bath ADA Compilant CF



Linear bath bar with a perfect balance of glass and metal. May be mounted horizontally or vertically. Fluorescent includes (1) 24 watt mini bi-pin base T5 high output linear fluorescent lamp and electronic ballast; Halogen includes (5) 40 watt G9 base halogen lamps. 120 or 277v.

		OP opa	l		x40w (HW only) nini bi-pin 1x24w (PW only)
type <b>HW</b>	model 496	color <b>OP</b>	finish SC	<sup>lamp</sup> <b>2G40</b>	voltage
HW hal	ogen npact fluore	escent	BZ bron: PC polis SC satin	hed chrome	PW only 1HE 120v 2HE 277v for HW. leave blank



### linea bath ADA compliant



Provides a tremendous range of application opportunities. This incandescent source adapts well to most residential or commercial applications. The low glare, opal finish linear lamp offers maximum light with minimal heat in a highly contemporary style. May be installed in tandem for a continuous unbroken line of light. Incandescent 20" includes (1) 60 watt S14S base double-ended Linestra lamp; Incandescent 40" includes (1) 150 watt S14S base double-ended Linestra lamp. 120v.


**LN060SI** 60w

LN120SI 150w








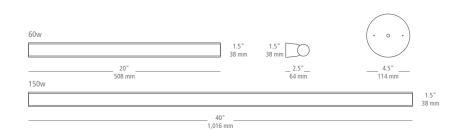






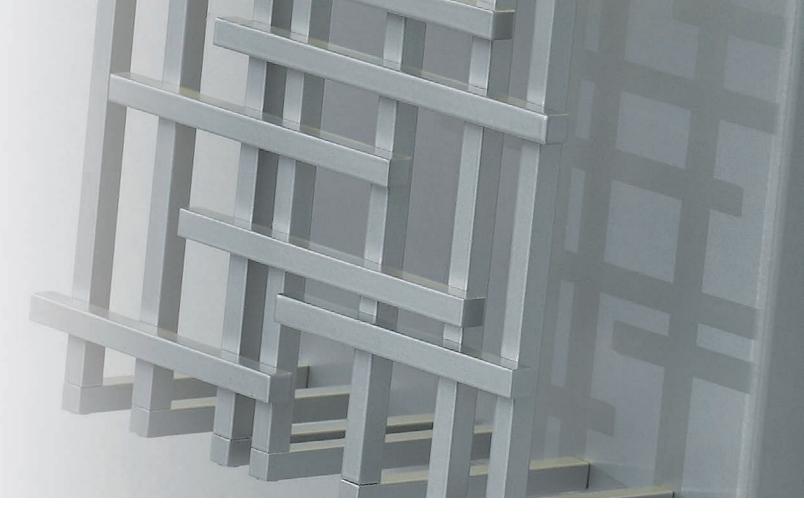

pier 60 outdoor Complete LED Metal grid provides a delicate balance of light and shadow. Includes (1) replaceable 9.6 watt 2700K LED module. ADA compliant. 120v.

		<b>LED</b> LED n	nodule 9.6w	
type	model 639	finish <b>B7</b>	lamp I F D	wet location
IWIFD	033	BZ bro		VV
LVV LED		SI silve		














uptown small outdoor Devertical metal slats with a metal base. Includes (1) replaceable 9.6 watt 2700K LED module. 120v.

			<b>LED</b> LED r	nodule 9.6w
type <b>LW</b>	model 642	finish <b>S</b> I	lamp LED	wet location
LW LED		SI silve BZ bro BL blace	nze	










# uptown large outdoor (ED) Vertical metal slats with a metal base. Includes (1)

replaceable 9.6 watt 2700K LED module. 120v.


			LED LED i	module 9.6w
type	model	finish	lamp	wet location
LW	641	BL	LED	W
LW LED		SI silve BZ bro BL blac	nze	



### palm lane small outdoor

Clean-lined metal base with an opal glass cylinder. Incandescent includes (1) E26 medium base 60 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp. 120v or 277v.

		lon		for JW only: 2D A19 E26 for PW only	60w :		
<b>OP</b> opal			al	<b>CF</b> GX24Q-	3 18w triple	e tube	
type	model	color	finish	lamp voltage wet location		wet location	
PW	638	OP	SI	CF	1HE	W	
	ndescent npact fluore	escent	BL black BZ bronze SI silver	2	<b>1HE</b> 120v <b>2HE</b> 277v for PW onl	y, for JW leav	e blank



wall projection 7.9" / 200 mm



palm lane large outdoor Clean-lined metal base with an opal glass cylinder. Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 26 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 32 watt triple tube compact fluorescent lamp (not included). 120v or 277v.

		<b>OP</b> opa	al	for JW only: <b>2D</b> A19 E26 for PW only <b>CF</b> GX24Q-	5 75w :	e tube		
type <b>PW</b>	model 637	color <b>OP</b>	finish <b>BZ</b>	lamp voltage wet location THE W				
	ndescent npact fluore	escent	BL black BZ bronze SI silver	2	<b>1HE</b> 120v <b>2HE</b> 277v for PW only	v, for JW leave	e blank	



wall projection 7.9" / 200 mm








boardwalk small outdoor Sleek metal frame offers down light through an opal glass diffuser. Incandescent includes (1) E26 medium base 60 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp. 120v or 277v.

		BL black SI silver		<b>1HE</b> 120v <b>2HE</b> 277v for PW only	, for JW leave blan
type <b>PW</b>	model 635	finish <b>BL</b>	lamp <b>CF</b>	voltage 1HE	wet location
JW incandescent PW compact fluorescent		for JW only: 2D A19 E26 60w for PW only: CF GX24O-2 18w triple tube			



wall projection 5.5" / 140 mm




# boardwalk large outdoor Sleek metal frame offers down light through an opal glass diffuser.



Incandescent includes (1) E26 medium base 75 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-3 base 26 watt triple tube compact fluorescent lamp. May also be lamped with a GX24Q-3 26 watt triple tube compact fluorescent lamp (not included). 120v or 277v.

		BL black SI silver		<b>1HE</b> 120v <b>2HE</b> 277v for PW only,	for JW leave	blank
type <b>PW</b>	model 636	finish SI	lamp <b>CF</b>	voltage 1HE	wet location	
	JW incandescent PW compact fluorescent		for JW only: <b>2D</b> A19 E26 75w for PW only: <b>CF</b> GX240-3 26w triple tube			




wall projection 5.5" / 140 mm





omni with cover small outdoor [Image: Image: caps and glass cover. IP67 rated. Features slumped glass and metal shade options for optimal design flexibility. Mounts vertically only. Incandescent includes (1) E26 medium base 60 watt or equivalent BT15 halogen lamp; fluorescent includes (1) 2G10 base 18 watt flat quad tube compact fluorescent lamp and electronic ballast; LED includes (1) replaceable 10 watt 2700K LED module. 120 or 277v.







BAM

bubble glass
BBR brown smoke
BBU blue
BOP opal
BAM dark amber

horizontal carved glass\* **HFR** frost metal\*

**BGR** green

MET meta

**2D** BT15 E26 60w 120v (JW only) **CF1HE** 2G10 18w flat quad tube 120v (PW only)

CF2HE 2G10 18w flat quad tube 277v (PW only) LED LED module 10w 120v (LW only) LED277 LED module 10w 277v (LW only)

mar: I .			D7		
JW	559	BAM	SI	2D	W
	model				wet location

PW compact fluorescent LW LED

BZ bronze SI silver









BOP



BGR




HFR



MET

<sup>\*</sup> Horizontal Carved Glass and Metal not available with incandescent lamp.





### omni with cover medium outdoor

Minimal outdoor luminaire with extruded aluminum housing, die-cast end caps and glass cover. IP67 rated. Features slumped glass and metal shade options for optimal design flexibility. Mounts vertically only. Incandescent includes (2) E26 medium base 60 watt or equivalent BT15 halogen lamps; fluorescent includes (1) 2G11 base 24 watt twin tube compact fluorescent lamp and electronic ballast. Fluorescent version may also be lamped with (1) 2G11 base 27 watt twin tube compact fluorescent lamp (not included). 120 or 277v.

		bubble glass BBR brown smoke BBU blue BOP opal BAM dark amber BGR green horizontal carved glass* HFR frost metal*			5 E26 2x60 1 24w twin	w (JW only) tube (PW only)
type	model <b>561</b>	color MET	finish SI	lamp 2D	voltage	wet location
JW incandescent PW compact fluorescent		BZ bronze SI silver		1HE 120v 2HE 277v for PW only leave blank	,	

 $<sup>^{\</sup>star}$  Horizontal Carved Glass and Metal not available with incandescent lamp.













HFR

### omni small outdoor ompian :



Minimal outdoor luminaire with extruded aluminum housing, die-cast end caps and opal glass cover. IP67 rated. May be mounted vertically or horizontally. Incandescent includes (1) E26 medium base 60 watt or equivalent BT15 halogen lamp; fluorescent includes (1) 2G10 base 18 watt flat quad tube compact fluorescent lamp and electronic ballast; LED includes (1) replaceable 10 watt 2700K LED module. ADA compliant. 120 or 277v.


> | 2D BT15 E26 60w 120v (JW only) CF1HE 2G10 18w flat quad tube 120v (PW only) CF2HE 2G10 18w flat quad tube 277v (PW only) LED LED module 10w 120v (LW only) LED277 LED module 10w 277v (LW only)

		OF Opai		LEDZII LLD IIIOUU		
type PW	model 583	color <b>OP</b>	finish SI	lamp <b>CF</b>	wet location	

I OP onal

JW incandescent PW compact fluorescent LW LED

BZ bronze SI silver






### omni medium outdoor ADA Compian Co





Minimal outdoor luminaire with extruded aluminum housing, die-cast end caps and opal glass cover. IP67 rated. May be mounted vertically or horizontally. Incandescent includes (2) E26 medium base 60 watt or equivalent BT15 halogen lamps; fluorescent includes (1) 2G11 base 24 watt twin tube compact fluorescent lamps and electronic ballast. Fluorescent version may also be lamped with (1) 2G11 base 27 watt twin tube compact fluorescent lamp (not included). ADA compliant 120 or 277v.

				2D BT15 E26 2x60w (JW only)		
<b>OP</b> opal				CF 2G11 24w twin tube (PW on		
type	model	color	finish	lamp	voltage	wet location
PW	564	OP	BZ	CF	1HE	W
JW incandescent		BZ bronze		<b>1HE</b> 120v		
PW compact fluorescent		SI silver		2HE 277v		
					for PW only	; for JW
					leave blank	







venus outdoor in opal











AM

stingray venus ADA B complant CF
Cased Murano glass. Fluorescent 13w Quad includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 18w Quad includes (2) 18 watt G24Q-2 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (2) 40 watt or equivalent E26 medium base T10 lamps (not included).

		AM amber		for PW only: 1HE 120v 2HE 277v for JW, leave	
type PW	model <b>6026</b>	color	lamp <b>213</b>	voltage 1HE	wet location
JW incandescent PW compact fluorescent		213 G24 2x13w q 218 G24 2x18w q 226 G24 2x26w q 240 T10 2x40w	uad tube IQ-2 uad tube IQ-3 uad tube		

### stingray saturn ADA COMPILIANT STATE OF

Outdoor version of Saturn fixture includes die-cast aluminum trim ring, clear polycarbonate enclosure, and waterproof rubber gasket. Available in black, bronze, silver and white finish. Fluorescent 13w Quad includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 18w Quad includes (2) 18 watt G24Q-2 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (2) 40 watt E26 medium base T10 lamps (not included).

		B black BZ bronze S silver W white		for PW only: 1HE 120v 2HE 277v for JW, leave	blank
type	model	finish	lamp	voltage	wet location
PW	6021	S	213	1HE	W
JW incandescent PW compact fluorescent		213 G24Q-1 2x13w quad tube 218 G24Q-2 2x18w quad tube 226 G24Q-3 2x26w quad tube 240 T10 E26 2x40w			







### stingray mercury ADA Complant Complant





Outdoor version of Mercury fixture includes die-cast aluminum trim ring, clear polycarbonate enclosure, and waterproof rubber gasket. Available in black, bronze, silver and white finish. Fluorescent 13w Quad includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 18w Quad includes (2) 18 watt G24Q-2 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (2) 40 watt E26 medium base T10 lamps (not included).

Lf... DIA/ ...l.

		B black BZ bronze S silver W white		1HE 120v 2HE 277v for JW, leave blank	
type PW	model <b>6024</b>	finish <b>BZ</b>	lamp <b>213</b>	voltage 1HE	wet location
JW incandescent PW compact fluorescent		213 G24Q-1 2x13w quad tube 218 G24Q-2 2x18w quad tube 226 G24Q-3 2x26w quad tube 240 T10 E26 2x40w			



wall projection 3.9" / 99 mm







#### industrial

Wall mounted specification grade luminaire. IP67 rated. Inner assembly constructed of extruded aluminum with a tempered glass cover. A double coat of epoxy primer and polyester powder-coating mean durability even in harsh outdoor conditions. The outer decorative cover is constructed of stainless steel. The brushed steel finish includes silver luminaire and has been electrophoretically coated which not only enhances the beauty of the finish, but also increases surface durability and helps to protect against damaging environmental conditions. The bronze finish includes bronze luminaire and utilizes a polyester powder coat paint to help protect against damaging environmental conditions. Mounts vertically only. Available in two lamping options (lamps included): Incandescent includes (2) 120 volt 60 watt or equivalent E26 base BT15 halogen lamps; Fluorescent includes (2) 24 watt 2G11 base twin tube compact fluorescent lamps. Fluorescent may also be lamped with (2) 18 or 27 watt 2G11 base twin tube compact fluorescent lamps (not included). 120v or 277v.



# industrial large 🚦



Mounts vertically only. Available in two fluorescent lamping options (lamps included): (2) 39 watt mini bi-pin base T5 high output linear fluorescent lamps, or (2) 25 watt bi-pin base T8 linear fluorescent lamps. Emergency ballast option also available. 120v or 277v.

	BZ bronze		1HE 120v 2HE 277v 1HB 120v emergency ballast 2HB 277v emergency ballast	
model PW528	finish SS	lamp 25L	voltage 1HB	wet location
		<b>39L</b> T5 HO m bi-pin 2x <b>25L</b> T8 bi-pin	39w	W wet location

#### industrial medium 👭



Mounts vertically only. Available in two fluorescent lamping options (lamps included): (2) 24 watt mini bi-pin base T5 high output linear fluorescent lamps, or (2) 17 watt bi-pin base T8 linear fluorescent lamps. Emergency ballast option also available. 120v or 277v.

	BZ bronze SS brushed		1HE 120v 2HE 277v 1HB 120v emergency ballast 2HB 277v emergency ballast	
model PW527	finish <b>BZ</b>	lamp 24L	voltage 2HB	wet location
		<b>24L</b> T5 HO mini bi-pin 2x24w <b>17L</b> T8 bi-pin 2x17w		<b>W</b> wet location

#### industrial small 🚦



Mounts vertically only. Available in two lamping options (lamps included): Incandescent includes (2) 120 volt 60 watt E26 base BT15 halogen lamps; Fluorescent includes (2) 24 watt 2G11 base twin tube compact fluorescent lamps. Fluorescent may also be lamped with (2) 18 or 27 watt 2G11 base twin tube compact fluorescent lamps (not included). 120v or 277v.

		BZ broi	nze	for PW only: 1HE 120v 2HE 277v for JW, leave	
type <b>JW</b>	model <b>119</b>	finish SS	<sup>lamp</sup> 260	voltage	wet location
JW incandescent PW compact fluorescent		260 BT15 E26 2x60w 224 2G11 2x24w twin tube		<b>W</b> wet location	



#### tubular

Wall mounted specification grade luminaire. IP67 rated. Inner assembly constructed of extruded aluminum with a tempered glass cover. A double coat of epoxy primer and polyester powder-coating mean durability even in harsh outdoor conditions. The outer decorative cover is constructed of stainless steel. The brushed steel finish includes silver luminaire and has been electrophoretically coated which not only enhances the beauty of the finish, but also increases surface durability and helps to protect against damaging environmental conditions. The bronze finish includes bronze luminaire and utilizes a polyester powder coat paint to help protect against damaging environmental conditions. Mounts vertically only. Available in two lamping options (lamps included): Incandescent includes (2) 120 volt 60 watt or equivalent E26 base BT15 halogen lamps; Fluorescent includes (2) 24 watt 2G11 base twin tube compact fluorescent lamps. Fluorescent may also be lamped with (2) 18 or 27 watt 2G11 base twin tube compact fluorescent lamps (not included). 120v or 277v.



# tubular large 🚦



Mounts vertically only. Available in two fluorescent lamping options (lamps included): (2) 39 watt mini bi-pin base T5 high output linear fluorescent lamps, or (2) 25 watt bi-pin base T8 linear fluorescent lamps. Emergency ballast option also available. 120v or 277v.

	BZ bronze SS brushed			mergency ballast mergency ballast
model PW532	finish <b>B7</b>	lamp 391	voltage 1HR	wet location
FVVJJZ	DZ	<b>39L</b> T5 HO m bi-pin 2x	ini	W wet location
25L T8 bi-pin				

#### tubular medium 📙



Mounts vertically only. Available in two fluorescent lamping options (lamps included): (2) 24 watt mini bi-pin base T5 high output linear fluorescent lamps, or (2) 17 watt bi-pin base T8 linear fluorescent lamps. Emergency ballast option also available. 120v or 277v.

	BZ bronze SS brushed stainless steel			mergency ballast mergency ballast
model PW531	finish SS	lamp 24L	voltage 2HB	wet location
		<b>24L</b> T5 HO mi bi-pin 2x <b>17L</b> T8 bi-pin	24w	W wet location

# tubular small 🚦



Mounts vertically only. Available in two lamping options (lamps included): Incandescent includes (2) 120 volt 60 watt E26 base BT15 halogen lamps; Fluorescent includes (2) 24 watt 2G11 base twin tube compact fluorescent lamps. Fluorescent may also be lamped with (2) 18 or 27 watt 2G11 base twin tube compact fluorescent lamps (not included). 120v or 277v.

		SS brus		for PW only: 1HE 120v 2HE 277v	
type <b>PW</b>	model 120	finish <b>BZ</b>	1amp 224	voltage 1HE	wet location
	ndescent npact fluo	rescent	260 BT15 E2 224 2G11 2x twin tub	24w	<b>W</b> wet location



#### new york

Wall mounted specification grade luminaire. IP67 rated. Inner assembly constructed of extruded aluminum with a tempered glass cover. A double coat of epoxy primer and polyester powder-coating mean durability even in harsh outdoor conditions. The outer decorative cover is constructed of stainless steel. The brushed steel finish includes silver luminaire and has been electrophoretically coated which not only enhances the beauty of the finish, but also increases surface durability and helps to protect against damaging environmental conditions. The bronze finish includes bronze luminaire and utilizes a polyester powder coat paint to help protect against damaging environmental conditions. Mounts vertically only. Available in two lamping options (lamps included): Incandescent includes (2) 120 volt 60 watt or equivalent E26 base BT15 halogen lamps; Fluorescent includes (2) 24 watt 2G11 base twin tube compact fluorescent lamps. Fluorescent may also be lamped with (2) 18 or 27 watt 2G11 base twin tube compact fluorescent lamps (not included). 120v or 277v.



# new york large !

Mounts vertically only. Available in two fluorescent lamping options (lamps included): (2) 39 watt mini bi-pin base T5 high output linear fluorescent lamps, or (2) 25 watt bi-pin base T8 linear fluorescent lamps. Emergency ballast option also available. 120v or 277v.

	BZ bronze SS brushed			mergency ballast mergency ballast
model PW530	finish SS	lamp 39L	voltage 1HE	wet location
		<b>39L</b> T5 HO mi bi-pin 2x <b>25L</b> T8 bi-pin	39w	W wet location

# new york medium !



Mounts vertically only. Available in two fluorescent lamping options (lamps included): (2) 24 watt mini bi-pin base T5 high output linear fluorescent lamps, or (2) 17 watt bi-pin base T8 linear fluorescent lamps. Emergency ballast option also available. 120v or 277v.


	BZ bronze SS brushed stainless steel				
model PW529	finish <b>BZ</b>	lamp 17L	voltage 2HE	wet location	
		<b>24L</b> T5 HO mi bi-pin 2x2 <b>17L</b> T8 bi-pin	24w	W wet location	

#### new york small 🚦



Mounts vertically only. Available in two lamping options (lamps included): Incandescent includes (2) 120 volt 60 watt E26 base BT15 halogen lamps; Fluorescent includes (2) 24 watt 2G11 base twin tube compact fluorescent lamps. Fluorescent may also be lamped with (2) 18 or 27 watt 2G11 base twin tube compact fluorescent lamps (not included). 120v or 277v.

		BZ bro SS brus		for PW only: 1HE 120v 2HE 277v	
type <b>PW</b>	model <b>115</b>	finish SS	1amp 224	voltage 1HE	wet location
JW incandescent PW compact fluorescent		<b>260</b> BT15 E2 <b>224</b> 2G11 2x twin tube	24w	<b>W</b> wet location	

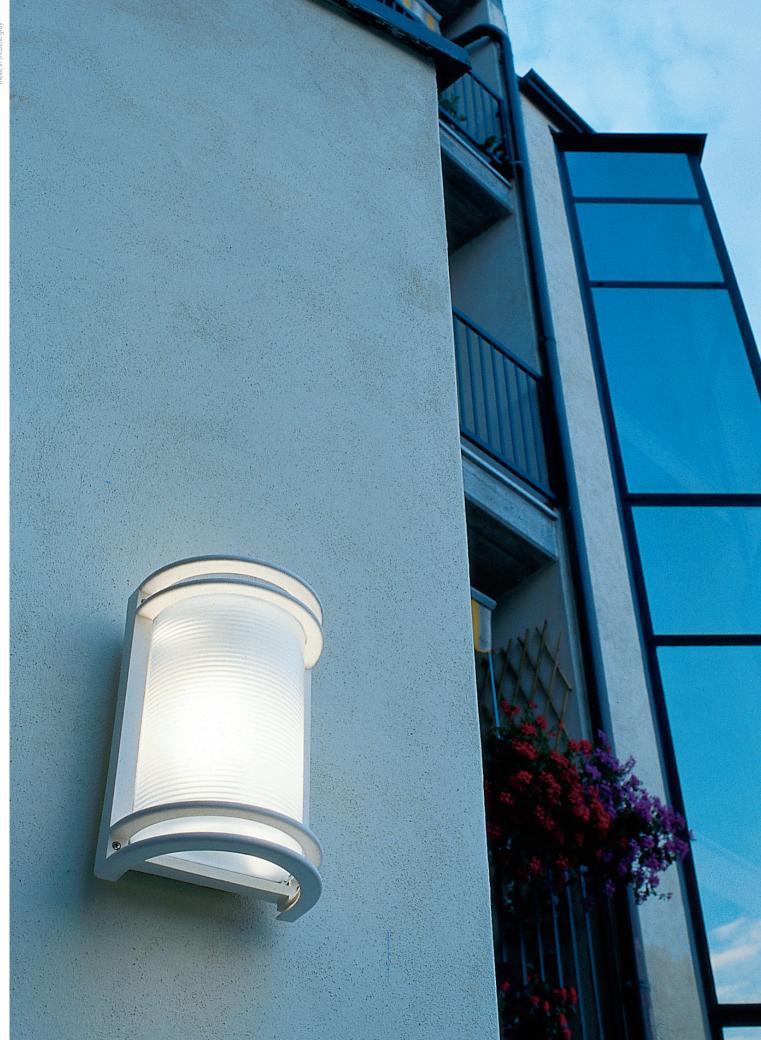



wall projection 5.4" / 137 mm

nikko 🔋

Features body, trim and reflector made of self-extinguishing polycarbonate; diffuser made of ice-etched glass; aluminum reflector (incandescent version); and stainless steel screws. Fluorescent 13w Quad includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Fluorescent 18w Quad includes (1) 18 watt G24Q-2 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base B10 lamp (not included).

model	lamp	ballast	color
1471	E26 1x60w B10	none	white
1472	E26 1x60w B10	none	black
1473	E26 1x60w B10	none	metallic gray
1480HE	G24Q-1 1x13w quad	electronic	white
1481HE	G24Q-1 1x13w quad	electronic	black
1482HE	G24Q-1 1x13w quad	electronic	metallic gray
1489HE	G24Q-2 1x18w quad	electronic	white
1490HE	G24Q-2 1x18w quad	electronic	black
1491HE	G24Q-2 1x18w quad	electronic	metallic gray



# nikko visa 🖁

Features body, trim and reflector made of self-extinguishing polycarbonate; diffuser made of ice-etched glass; aluminum reflector (incandescent version); and stainless steel screws. Fluorescent 13w Quad includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Fluorescent 18w Quad includes (1) 18 watt G24Q-2 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base B10 lamp (not included).



model	lamp	ballast	color
1477	E26 1x60w B10	none	white
1478	E26 1x60w B10	none	black
1479	E26 1x60w B10	none	metallic gray
1486HE	G24Q-1 1x13w quad	electronic	white
1487HE	G24Q-1 1x13w quad	electronic	black
1488HE	G24Q-1 1x13w quad	electronic	metallic gray
1495HE	G24Q-2 1x18w quad	electronic	white
1496HE	G24Q-2 1x18w quad	electronic	black
1497HE	G24Q-2 1x18w quad	electronic	metallic gray

nikko/g Features body, trim and reflector made of self-extinguishing polycarbonate; diffuser made of ice-etched glass; aluminum reflector (incandescent version); and stainless steel screws. Fluorescent 13w Quad includes (1) 13 watt G24Q-1 base guad tube compact fluorescent lamps and electronic ballast; Fluorescent 18w Quad includes (1) 18 watt G24Q-2 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base B10 lamp (not included).

model	lamp	ballast	color
1474	E26 1x60w B10	none	white
1475	E26 1x60w B10	none	black
1476	E26 1x60w B10	none	metallic gray
1483HE	G24Q-1 1x13w quad	electronic	white
1484HE	G24Q-1 1x13w quad	electronic	black
1485HE	G24Q-1 1x13w quad	electronic	metallic gray
1492HE	G24Q-2 1x18w quad	electronic	white
1493HE	G24Q-2 1x18w quad	electronic	black
1494HE	G24Q-2 1x18w quad	electronic	metallic gray



wall projection 5.4" / 137 mm





nikko grille Features body, trim and reflector made of self-extinguishing polycarbonate; diffuser made of ice-etched glass; aluminum reflector (incandescent version); and stainless steel screws. Fluorescent 13w Quad includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Fluorescent 18w Quad includes (1) 18 watt G24Q-2 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base B10 lamp (not included).

model	lamp	ballast	color
1590	E26 1x60w B10	none	white
1591	E26 1x60w B10	none	black
1592	E26 1x60w B10	none	metallic gray
1593HE	G24Q-1 1x13w quad	electronic	white
1594HE	G24Q-1 1x13w quad	electronic	black
1595HE	G24Q-1 1x13w quad	electronic	metallic gray
1596HE	G24Q-2 1x18w quad	electronic	white
1597HE	G24Q-2 1x18w quad	electronic	black
1598HE	G24Q-2 1x18w quad	electronic	metallic gray





eclipse in chrome coat










eclipse CF
Wall washing aluminum disc. Also available in indoor version. Fluorescent includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (2) 40 watt or equivalent E26 medium base B10 lamps (not included).

		B black C chrom R rust V verde	ne coat	for PW or <b>1HE</b> 120 <b>2HE</b> 277 for JW, le	v
type PW	model 612	finish C	lamp <b>213</b>	voltage 1HE	wet location
JW incandescent PW compact fluorescent		for PW only: 213 G24Q-1 2x13w quad tube for JW only: 240 E26 B10 2x40w		N	



wall projection 6" / 152 mm

#### polo

Wall light. Features a internally sandblasted glass diffuser, gallery and screen made of self-extinguishing polycarbonate/ABS, and stainless steel screws. Accepts (1) 40 watt or equivalent E12 base G16.5 lamp (not included).

model	lamp	ballast	color
7701	E12 1x40w G16.5	none	black
7699	E12 1x40w G16.5	none	metallic gray



wall projection 4.1" / 104 mm

superdelta tondo Features an internally sandblasted glass diffuser, body and protective casing made of self-extinguishing polypropylene, aluminum reflector, and stainless steel screws. Fluorescent includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 75 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color
1720	E26 1x75w A19	none	white
1724	E26 1x75w A19	none	black
1718	E26 1x75w A19	none	metallic gray
1777HE	G24Q-1 1x13w quad	electronic	white
1779HE	G24Q-1 1x13w quad	electronic	black
1783HE	G24Q-1 1x13w quad	electronic	metallic gray



wall projection 4.6" / 1117 mm



superdelta tondo visa Features an internally sandblasted glass diffuser, body and protective casing made of self-extinguishing polypropylene, aluminum reflector, and stainless steel screws. Fluorescent includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color
1728	E26 1x60w A19	none	white
1729	E26 1x60w A19	none	black
1730	E26 1x60w A19	none	metallic gray
1781HE	G24Q-1 1x13w quad	electronic	white
1782HE	G24Q-1 1x13w quad	electronic	black
1795HE	G24Q-1 1x13w quad	electronic	metallic gray












clipper/g Features an internally ice etched glass diffuser, polished brass or chrome housing and louver, brass lock screws, and polymer gasket. Fluorescent includes (1) 26 watt G24Q-3 base quad tube compact fluorescent lamp and electronic ballast; Incandescent includes (1) 75 watt or equivalent E26 medium base A19 lamp.

model	lamp	ballast	color
6950	E26 1x75w A19	none	brass
6950MC	E26 1x75w A19	none	chrome
6956HE	GX24Q-3 1x26w triple		brass
6956MCHE	GX24Q-3 1x26w triple		chrome






# presidio wet 🖁



Perforated metal sconce creates a beautiful light pattern. Includes (1) 100 watt R7S base 118mm double-ended lamp.

		B black S stainle W white		S standa T tamper	-
type <b>HW</b>	model 614	finish <b>S</b>	100	screw <b>S</b>	wet location
HW hal	ogen		100 R7S 100w dbl end halogen 118mm		





# futura ADA Compliant CF



Strong, linear form comprised of stainless steel and sandblasted white acrylic. Vertical or horizontal mounting possible. Outdoor version available. Fluorescent includes (1) 36 watt 2G11 base twin tube compact fluorescent lamp and electronic ballast; Incandescent accepts (2) 40 watt or equivalent E26 medium base B10 lamps (not included). Fluorescent may also be lamped with 2G11 base 39 watt twin tube compact fluorescent lamp (not included). 120V or 277V.

		Z bronz S brush steel	ed stainless	for PW or 1HE 120 2HE 277 for JW, le	V
type PW	model <b>940</b>	finish <b>S</b>	139	voltage 1HE	wet location
	ndescent npact fluor	escent	for JW only: 240 E26 B1 for PW only 139 2G11 3	0 2x40w	ube

#### visir 20 🔋



Wall luminaire features self-extinguishing (V-2 850° C glow wire test) technopolymer housing and cover and satin glass diffuser. Fluorescent includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color
8528	E26 1x60w A19	none	white
8529	E26 1x60w A19	none	black
8530	E26 1x60w A19	none	metallic gray
8531HE	G24Q-1 1x13w quad	electronic	white
8532HE	G24Q-1 1x13w quad	electronic	black
8533HE	G24Q-1 1x13w quad	electronic	metallic gray



wall projection 6.4" / 163 mm



#### visir 30 📱



Wall luminaire features self-extinguishing (V-2 850° C glow wire test) technopolymer housing and cover and satin glass diffuser. Fluorescent includes (1) 26 watt G24Q-3 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (2) 60 watt or equivalent E26 medium base A19 lamps (not included).

model	lamp	ballast	color
8538	E26 2x60w A19	none	white
8539	E26 2x60w A19	none	black
8540	E26 2x60w A19	none	metallic gray
8544HE	G24Q-3 1x26w quad	electronic	white
8545HE	G24Q-3 1x26w quad	electronic	black
8546HE	G24Q-3 1x26w quad	electronic	metallic gray



wall projection 6.4" / 163 mm




# geoform round ring



Specification grade die-cast aluminum fixture, with double-coated polyester powder finish, suitable for any outdoor environment. Fluorescent 1x26w Quad includes (1) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 2x26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base A19 lamps (not included) 120V, 277V or 220V.

	polycarbonate 26Q G24 OP opal glass 226 G24			Q-3 26w	w incandescent quad tube v quad tube
model	diffuser	finish	lamp	voltage	screws
6033	OP	W	226	1	S
		A archite bronze B black S silver W white		<b>3</b> 220v for 26Q a	S standard T tamper-proof and 226 lamp only; eave blank









# geoform round cage 🞚



Specification grade die-cast aluminum fixture, with double-coated polyester powder finish, suitable for any outdoor environment. Fluorescent 1x26w Quad includes (1) 26 watt G24Q-3 base guad tube compact fluorescent lamp and electronic ballast; Fluorescent 2x26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base A19 lamps (not included) 120V, 277V or 220V.

	' '	arbonate	26A A19 E26 2x60w incandescent ate 26Q G24Q-3 26w quad tube 226 G24Q-3 2x26w quad tube			
	<b>OP</b> opal	glass	<b>226</b> G240	Q-3 2x26v	v quad tube	
model	diffuser	finish	lamp	voltage	screws	
6C33	OP	S	226	1	S	
		A archite bronze B black S silver W white	2	2 277v 3 220v for 26Q a 226 lamp		of





# chip round 25

Features and internally sandblasted glass diffuser, polypropylene body and screen, aluminum reflector (incandescent versions) or polypropylene reflector (fluorescent versions), stainless steel screws, and side entry for conduit. Fluorescent includes (1) 13 watt G24Q-1 base guad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 75 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color
5740	E26 1x75w A19	none	white
5742	E26 1x75w A19	none	black
5744	E26 1x75w A19	none	metallic gray
5752HE	G24Q-1 1x13w quad	electronic	white
5754HE	G24Q-1 1x13w quad	electronic	black
5756HE	G24Q-1 1x13w quad	electronic	metallic gray





# chip oval 25 grille 🖁



Features an internally sandblasted glass diffuser, polypropylene body, aluminum reflector (incandescent versions only) or polypropylene reflector (compact fluorescent versions), stainless steel screws, and side entry for conduit. Fluorescent includes (1) 13 watt G24Q-1 base quad tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color
5706	E26 1x60w A19	none	white
5707	E26 1x60w A19	none	black
5708	E26 1x60w A19	none	metallic gray
5717HE	G24Q-1 1x13w quad	electronic	white
5718HE	G24Q-1 1x13w quad	electronic	black
5719HE	G24Q-1 1x13w quad	electronic	metallic gray

# geoform square cage 🚦



Specification grade die-cast aluminum fixture, with double-coated polyester powder finish, suitable for any outdoor environment. Fluorescent 1x26w Quad includes (1) 26 watt G24Q-3 base guad tube compact fluorescent lamp and electronic ballast; Fluorescent 2x26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base A19 lamps (not included) 120V, 277V or 220V.

	OY opal acrylic OP opal glass		<b>26A</b> A19 E26 2x60w incandescent <b>26Q</b> G24Q-3 26w quad tube <b>226</b> G24Q-3 2x26w quad tube		
model	diffuser	finish	lamp	voltage	screws
7C33	OP	Α	226	1	S
		A archite bronze B black S silver W white	2	<b>3</b> 220v for 26Q a	S standard T tamper-proof and 226 lamp only; eave blank






# geoform square visor



Specification grade die-cast aluminum fixture, with double-coated polyester powder finish, suitable for any outdoor environment. Fluorescent 1x26w Quad includes (1) 26 watt G24Q-3 base quad tube compact fluorescent lamp and electronic ballast; Fluorescent 2x26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base A19 lamps (not included) 120V, 277V or 220V.

	OY opal acrylic OP opal glass		<b>26Q</b> G24	Q-3 26w	w incandescent quad tube v quad tube
model	diffuser	finish	lamp	voltage	screws
<b>7V33</b>	OP	5	226	1	5
		A archite bronze B black		<b>3</b> 220v	S standard T tamper-proof
		S silver W white			and 226 lamp only; eave blank








**geoform square ring**Specification grade die-cast aluminum fixture, with double-coated polyester powder finish, suitable for any outdoor environment. Fluorescent 1x26w Quad includes (1) 26 watt G24Q-3 base quad tube compact fluorescent lamp and electronic ballast; Fluorescent 2x26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 60 watt or equivalent E26 medium base A19 lamps (not included) 120V, 277V or 220V.

	OY opal acrylic OP opal glass		<b>26A</b> A19 E26 2x60w incandescent <b>26Q</b> G24Q-3 26w quad tube <b>226</b> G24Q-3 2x26w quad tube		
model	diffuser	finish	lamp	voltage	screws
7033	OP	S	226	1	S
		A archite bronze B black S silver W white	2	<b>3</b> 220v for 26Q a	S standard T tamper-proof and 226 lamp only eave blank







## large round aluminum bulkhead with visor 📮

Wall or ceiling mounted die cast luminaire. Stainless steel screws and sanded glass are standard; polycarbonate diffuser available. Rustproof durable powder coat in black or white. Fully gasketed. Fluorescent includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color	type
5177C	A19 1x100w A19	none	white	incandescent
5177C-SI	A19 1x100w A19	none	silver	incandescent
5177C-BZ	A19 1x100w A19	none	bronze	incandescent
5178C	A19 1x100w A19	none	black	incandescent
5177C50MH	E17MH 1x50w	electronic	white	HID—high metal halide
5178C50MH	E17MH 1x50w	electronic	black	HID—high metal halide
	G24Q-4 1x42w triple	electronic	bronze	compact fluorescent
	G24Q-4 1x42w triple	electronic	silver	compact fluorescent



# large round aluminum bulkhead with guard Figure Wall or ceiling mounted die cast luminaire. Stainless steel screws and sanded glass are

Wall or ceiling mounted die cast luminaire. Stainless steel screws and sanded glass are standard; polycarbonate diffuser available. Rustproof durable powder coat. Fully gasketed. Fluorescent includes (1) 42 watt GX24Q-4 base triple tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included); Metal Halide includes (1) 50 watt E26 medium base E17 metal halide lamp.

model	lamp	ballast	color	type
5161C	A19 1x100w A19	none	white	incandescent
5161C-BZ	A19 1x100w A19	none	bronze	incandescent
5161C-SI	A19 1x100w A19	none	silver	incandescent
5168C	A19 1x100w A19	none	black	incandescent
5161C50MH	E17MH 1x50w MH	electronic	white	HID—high metal halide
5168C50MH	E17MH 1x50w MH	electronic	black	HID—high metal halide
5237CHE	G24Q-4 1x42w triple	electronic	white	compact fluorescent
5237C-BZHE	G24Q-4 1x42w triple	electronic	bronze	compact fluorescent
5237C-SIHE	G24Q-4 1x42w triple	electronic	silver	compact fluorescent
5245CHE	G24Q-4 1x42w triple	electronic	black	compact fluorescent



### large round aluminum bulkhead 🖁

Wall or ceiling mounted die cast luminaire. Features sanded glass, stainless steel screws, and rustproof durable powder coat. Fully gasketed. Fluorescent includes (1) 42 watt GX24Q-4 base triple tube compact fluorescent lamp and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included); Metal Halide includes (1) 50 watt E26 medium base E17 metal halide lamp.

model	lamp	ballast	color	type
5160C	A19 1x100w A19	none	white	incandescent
5167C	A19 1x100w A19	none	black	incandescent
5160C50MH	E17MH 1x50w MH	electronic		HID-high metal halide
5167C50MH	E17MH 1x50w MH	electronic		HID-high metal halide
5235CHE	G24Q-4 1x42w triple	electronic	white	compact fluorescent
5243CHE	G24Q-4 1x42w triple	electronic	black	

# small round aluminum bulkhead ADA

Wall or ceiling mounted die cast luminaire. Features sanded glass, stainless steel screws, and rustproof durable powder coat. Fully gasketed. Accepts (1) 60 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color
5140C	A19 1x60w	white	incandescent
5140CBZ	A19 1x60w	bronze	incandescent
5147C	A19 1x60w	black	incandescent





#### small oval aluminum bulkhead

Wall or ceiling mounted die cast luminaire available in two sizes. Stainless steel screws and sanded glass are standard; polycarbonate diffuser available. Rustproof durable powder coat. Fully gasketed. Accepts (1) 60 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color	type
5100C	A19 1x60w	none	white	incandescent
5100C-BZ	A19 1x60w	none	bronze	incandescent
5107C	A19 1x60w	none	black	incandescent





# small oval aluminum bulkhead with guard Wall or ceiling mounted die cast luminaire. Stainless steel screws and sanded glass are

Wall or ceiling mounted die cast luminaire. Stainless steel screws and sanded glass are standard; polycarbonate diffuser available. Rustproof durable powder coat in black or white. Fully gasketed. Accepts (1) 60 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color	type
5101C	A19 1x60w	none	white	incandescent
5108C	A19 1x60w	none	black	incandescent







## large oval aluminum bulkhead 🖟



Wall or ceiling mounted die cast luminaire available in two sizes. Stainless steel screws and sanded glass are standard; polycarbonate diffuser available. Rustproof durable powder coat. Fully gasketed. Fluorescent includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color	type
5120C	A19 1x100w A19	none	white	incandescent
5120C-BZ	A19 1x100w A19	none	bronze	incandescent
5127C	A19 1x100w A19	none	black	incandescent
5201CHE	G24Q-1 2x13w quad	electronic	white	compact fluorescent compact fluorescent
5209CHE	G24Q-1 2x13w quad	electronic	black	





# large oval aluminum bulkhead with guard Wall or ceiling mounted die cast luminaire. Stainless steel screws and sanded glass



are standard; polycarbonate diffuser available. Rustproof durable powder coat in black or white. Fully gasketed. Fluorescent includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color	type
5121C 5121C-BZ 5121C-SI 5128C	A19 1x100w A19 A19 1x100w A19 A19 1x100w A19 A19 1x100w A19	none none none	white bronze silver black	incandescent incandescent incandescent incandescent
5203CHE 5203CBZHE 5203CSIHE 5211CHE	G24Q-1 2x13w quad G24Q-1 2x13w quad G24Q-1 2x13w quad G24Q-1 2x13w quad	electronic electronic electronic electronic	white bronze silver black	compact fluorescent compact fluorescent compact fluorescent compact fluorescent




### large oval aluminum bulkhead with visor 1



Wall or ceiling mounted die cast luminaire. Stainless steel screws and sanded glass are standard; polycarbonate diffuser available. Rustproof durable powder coat in black or white. Fully gasketed. Fluorescent includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Incandescent accepts (1) 100 watt or equivalent E26 medium base A19 lamp (not included).

model	lamp	ballast	color	type
5137C	A19 1x100w A19	none	white	incandescent
5137C-BZ	A19 1x100w A19	none	bronze	incandescent
5137C-SI	A19 1x100w A19	none	silver	incandescent
5138C	A19 1x100w A19	none	black	incandescent
5137C2x13HE	G24Q-1 2x13w quad	electronic	white	compact fluorescent
5137C-BZ2x13HE	G24Q-1 2x13w quad	electronic	bronze	compact fluorescent
5137C-SI2x13HE	G24Q-1 2x13w quad	electronic	silver	compact fluorescent
5138C2x13HE	G24Q-1 2x13w quad	electronic	black	compact fluorescent



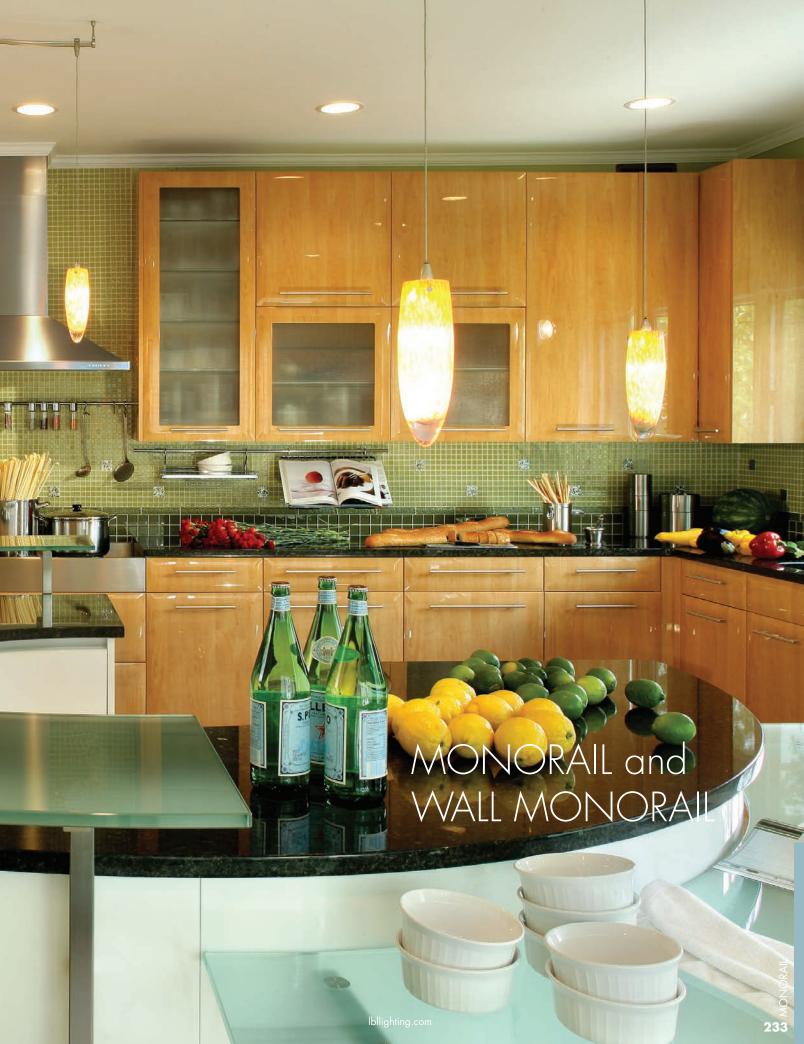

#### design your monorail system



When designing your Monorail system, the first step is to determine what you would like to light. Choose your decorative elements (fixtures) and where they should be installed to put the light where you want it. For a visual reference of the elements available, refer to pp. 10-13. You will see a thumbnail image of the element as well as a page number indicated where to find detailed ordering information. Some elements may be customized by adding decorative and functional accessories.



Layout your Monorail run. Rail can be installed straight or can be field-bent to create an organic shape or fo llow architectural details. We also offer pre-bent Monorail options for added flexibility. Once your layout is complete, measure the length of the run to determine the quantity and length of Monorail sections required (p. 236). Finish your run with a set of End Caps (p. 237).

#### add power and hardware to complete your system




Determine how far from the ceiling that you would like to position the system. Use Telescoping Rigid Standoffs for curvy runs or if you want the ability to fine-tune the drop from the ceiling without any cutting (p. 238). Adjustable cable standoffs offer a minimal appearance (p. 238). For wall-mounted applications specify Wall Monorail standoffs. Remember to space standoffs no more than every 3 feet.




Selecting a transformer is as easy as adding up the total wattage of all the lamps you will be using on the system. Remote transformers with Power Feed canopies offer a minimal appearance. Surface transformers may be installed over an existing junction box. Remodel Recessed transformers offer a minimal appearance in remodel applications, however, this cannot be used with concrete ceilings. Remember when using LED heads and pendants to choose a transformer that is LED compatible. Use the information on pp. 240, 242-243 to help you choose the correct transformer for your design.



We offer pre-configured kits to simplify ordering (p. 245).

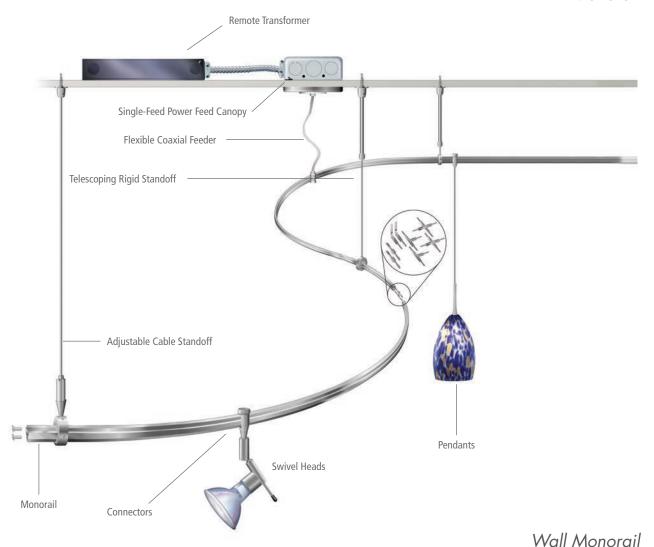

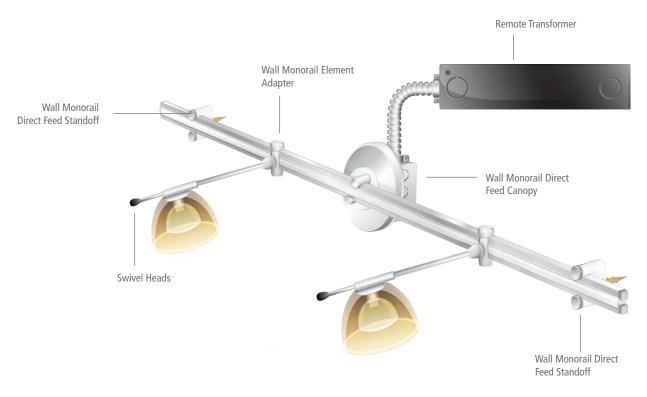

#### Monorail

#### monorail

Hand-bendable, field-cuttable monorail is rated for 300 watts at 12 volts, 600 watts at 24 volts. Each piece of rail is shipped with straight conductive connectors to join rail pieces end to end. Order additional connectors (p. 237) if cutting and rejoining rails.

	BZ bronze SC satin r	-
model RAIL-ST-	finish SC	length 96
		<b>48</b> 48" long <b>96</b> 96" long







## Monorail Pre-bent Options

#### 24" diameter circle

1/3 Round, Radius 12". Order three pieces to create a 24" diameter circle, or use our 24"circle kit on p. 245.



	SC62.5 bronze SC62.5 satin nicke
model	finish
RAILCV3-	SC62.5

#### 48" diameter circle

1/3 Round, Radius 24". Order three pieces to create a 48" diameter circle, or use our circle kit on p. 245.



	BZ125 bronze SC125 satin nickel
model RAILCV2-	finish SC125

#### soft curve

78" Diameter, 1/5 Round, Radius 39". Order five pieces to create a 78" diameter circle.




	BZ117 bronze SC117 satin nickel
model	finish
RAILCV1-	SC117

#### 32" monorail spiral Kit includes: Custom bent Monorail, Straight

Kit includes: Custom bent Monorail, Straight Conductive Connectors and End caps. (5) Standoffs required (sold separately). 32" Spiral.

	BZ32 bronze SC32 satin nickel
model RAILCVSPRL-	finish SC32



#### 48" monorail spiral Kit includes: Custom bent Monorail, Straight

Kit includes: Custom bent Monorail, Straight Conductive Connectors and End caps. (7) Standoffs required (sold separately). 48" Spiral.

	BZ48 bronze SC48 satin nick
model	finish
RAILCVSPRL-	SC48



#### Monorail Connectors

#### straight conductive

Straight conductive connectors join sections of Monorail together. (Pair.) Included with each piece of rail.



#### adjustable angle conductive

These connectors join sections of rail together allowing subtle to sharp horizontal angles. (Pair.)



### end caps

Decorative metal cap to give finished look to the ends of Monorail. (4 pc. set.)



## adjustable angle vertical connector

These connectors join sections on Monorail together allowing subtle vertical angles.



**VCONNECTOR BZ-M** 

#### straight isolating

Straight isolating connectors join sections of rail and isolate one powered run from another. (Pair.) These are typically used to separate one circuit from the other circuit when using surface or remote dual-feed transformers and to separate multiple transformers on a continuous run. Included with dual-feed surface transformers and power feed canopies. (See pp. 241-243.)



#### "t" conductive

These conductive connectors join three sections of Monorail together to create a "T". (Pair.) We recommend standoffs are placed no more than 6" away from the connector.



#### "x" conductive

These conductive connectors join four sections of Monorail together to create a four-way intersection. (Pair.) We recommend standoffs are placed no more than 6" away from the connector.



MONORAIL

#### Monorail Standoffs

Recommended every 3 feet. Versatile, telescoping standoffs allow you to choose your hanging method and height.

#### telescoping rigid standoffs

Rigid standoffs offer multifunction ceiling mounting in one part. Unique telescoping height adjustment and rotational head insert simplifies and perfects your installation. Self-drilling drywall anchor included with all standoffs. **NOTE:** When mounting on concrete ceiling or wall, order one SCW-MASONARY-A per standoff.

	BZ bronze SC satin nickel	
model HANGER-ADJ-	finish <b>SC</b>	-1
*When using with any surface mounted transformer, rail cannot be installed directly below the transformer.		-1 2.5"-4"* -2 6"-10" -3 12"-24" -4 24"-48" -5 48"-96"



Rotating head insert allows fine tuning of rail axis position and fixture orientation.



**NOTE:** Specify Surface Mounted Transformer or non-Direct Power Feed Canopy with Adjustable Cable or Telescoping Rigid Standoffs.Refer to pp. 241-242.

#### adjustable cable standoffs

Clean looking and fully adjustable cable standoff for ceiling mounting. Griplock allows for easy one-touch shortening or lengthening in the field. Offered in four stock lengths. Additional custom length cable can be specified. Self-drilling drywall anchor included with all standoffs.

	BZ bronze SC satin nickel		
model HANGER-CBL-	finish <b>BZ</b>	-6	
		-8	6' of cable 8' of cable 18' of cable
		-25	25' of cable



# direct feed telescoping rigid standoffs

Universal telescoping standoffs offer adjustability and simplified ordering.

Universal for all single-circuit direct feed surface transformers **except** 60w electronic flush.

	BZ1 bronze SC1 satin nickel
model HANGERDIRADJ	finish SC1

Universal for all single-circuit direct power feed canopies and 60w electronic flush direct feed surface transformer.

	BZ1 bronze SC1 satin nickel
model HANGERDIRRC	finish SC1







**NOTE:** Specify Direct Feed Surface Transformer or Direct Power Feed Canopy with Direct Feed Telescoping Rigid Standoffs. Refer to pp. 241, 243.

#### Monorail Special Installations

#### wall bracket

With cable support allows for extended, cantelievered wall mount. Available only for 2.5-4", 6-10" and 12-24" standoffs. Telescoping Rigid Standoffs (not included).

	BZ bronze SC satin nickel
model	finish
WB-ADJ-	20



# coaxial feeder cover (Optional)

Field-cuttable .25" diameter cover in plated finish slips over flexible feeder cable to form a solid line from power source to rail. Available in 48" or 96" lengths.

		-BZ bronze -SC satin nickel	
model FDRCVR-	length 48	finish -BZ	
	<b>48</b> 48" long <b>96</b> 96" long		#

### t-grid clip

Allows adaptation of any standoff to an inverted T-Grid ceiling rail. To be used with 15/16" (1) or 9/16" (2) T-Grid.

	<b>1</b> 15/16" grid <b>2</b> 9/16" grid	0
model CLIP-TB/MONO-	size	Ψ

#### ball joint

Attachment allows sloped ceiling mounting. Adapts simply to any telescoping rigid standoff (not included).

	BZ bronze SC satin nickel
model	finish
BJ-ADJ-	SC



#### wall (direct end) power feed

For single-feed remote transformer applications, to power the end of a run, from a perpendicular wall. Remote transformer sold separately, see p. 240. 2.75" round power feed canopy (conductive), 2" electrical box and matching isolated wall support (non-conductive; included).

	BZ bronze SC satin nickel	
model REMOTECNPY-WALL-	finish SC	

#### flexible end power feed

Used to power a Monorail system from one end of the run. Includes a removable 4" round canopy and 144" of field-cuttable softwire leads. Mounts to a standard 4" junction box with round plaster ring (provided by electrician). Remote transformer sold separately, see p. 240.

	BZ bronze SC satin nickel	A.
model REMOTECNPY-FLEX-	finish SC	

## Wall Monorail

# wall monorail direct feed standoff

Recommended every 3 feet. Versatile, telescoping standoffs allow you to choose your hanging method and height.

Supports the rail and positions in approximately 1" off the wall.

	BZ bronze SC satin nick	Bridge Bridge	
model HANGERDIRW-	finish SC		

## wall monorail element adapter

One adapter is required for each swivel head.

	BZ bronze SC satin nickel
model RAILADAP-WALL	finish SC



#### Remote Transformers

All Remote Transformers are encased in metal housings complete with mounting feet and conduit knockouts. Typically, you use a remote transformer when a cleaner installation appearance is desired. A remote transformer must be installed in an accessible remote location, the bulkier ceiling mounted surface transformer is replaced by a power feed canopy with flexible coaxial power feed cable or direct-feed connector. Please refer to the technical info on page 283 for important transformer information and performance specs.

Choices	Watt & Type	Model #	Input	Output	Compatible Dimmer
1.75"/	12 volt/150W Remote DC Electronic Single-Feed	TRANS-RMTE-150	1x120VAC/1.25A	1x150W	Electronic Low-voltage Dimmer, 600W
2°/ 8.5" 3.5"	12 volt/300W Remote DC Electronic Single-Feed	TRANS-RMTE-301	1x120VAC/2.5A	1x300W	Electronic Low-voltage Dimmer, 600W
5"	12 volt/75W Remote Magnetic Single-Feed	TRANS-RMTE-75M REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/.7A	1x75W	Magnetic Low-voltage Dimmer, 600W
9.5" LED	12 volt/75W Remote Magnetic Single-Feed	TRANS-RMTE-75M/277	1x277VAC/.3A	1x75W	Magnetic Low-voltage Dimmer, 600W
5"	12 volt/150W Remote Magnetic Single-Feed	TRANS-RMTE-150M REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/1.25A	1x150W	Magnetic Low-voltage Dimmer, 600W
9.5" LED	12 volt/150W Remote Magnetic Single-Feed	TRANS-RMTE-150M/277	1x277VAC/.55A	1x150W	Magnetic Low-voltage Dimmer, 600W
	12 volt/300W Remote Magnetic Single-Feed	TRANS-RMTE-300M REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/2.5A	1x300W	Magnetic Low-voltage Dimmer, 600W
5"	12 volt/300W Remote Magnetic Single-Feed	TRANS-RMTE-300M/277	1x277VAC/1.1A	1x300W	Magnetic Low-voltage Dimmer, 600W
9.5"	24 volt/300W Remote Magnetic Single-Feed	TRANS-RMTE-300M/24	1x120VAC/2.5A	1x300W	Magnetic Low-voltage Dimmer, 600W
Œ	24 volt/300W Remote Magnetic Single-Feed	TRANS-RMTE-300M/24V77	1x277VAC/1.1A	1x300W	Magnetic Low-voltage Dimmer, 600W
	12 volt/600W Remote Magnetic Dual-Feed	TRANS-RMTE-600M REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/5A	2x300W	Magnetic Low-voltage Dimmer, 1000W
5"	12 volt/600W Remote Magnetic Dual-Feed	TRANS-RMTE-600M/277	1x277VAC/2.2A	2x300W	Magnetic Low-voltage Dimmer, 1000W
9.5"	24 volt/600W Remote Magnetic Single-Feed	TRANS-RMTE-600M/24	1x120VAC/5A	2x600W	Magnetic Low-voltage Dimmer, 1000W
12v only <b>LED</b>	24 volt/600W Remote Magnetic Single-Feed	TRANS-RMTE-600M/24V77	1x277VAC/2.2A	2x600W	Magnetic Low-voltage Dimmer, 1000W

These transformers are compatible with LED Heads and Pendants.

ALL Remote Transformers must be accompanied by a Remote Canopy. The Remote Canopy covers the ceiling/wall electrical box and is equipped with a 36" flexible coaxial power feeder (see page 241). When using Dual-Feed, Transformers with Wall Monorail, two Remote canopies and one isolating connector are required.

#### How to calculate your wattage needs

2.75" and 4" remote canopies are available for ceiling and wall remote transformer applications. To find which is right for your system, add up the total wattage of the pendants or heads you'll be using (the number of pendants or heads x the total lamp wattage per fixture = total wattage). A combination of wattages may be chosen as long as the maximum wattage allowed by the transformer is not exceeded. For example (3) 50 watt, (4) 35 watt or (7) 20 watt elements can be specified per 150 watt transformer. (6) 50 watt, (8) 35 watt or (15) 20 watt elements can be specified per 300 watt transformer. Double a 300 watt limit for 600 watts.

Additional Important Transformer Information: Aside from wattage requirements and accessibility, the other important factor to consider when choosing a transformer is "voltage drop." The further a light source (pendant/head) is located from the transformer, the lower its voltage and brightness. Certain transformers are better suited to handle longer rail runs and distances from the transformer to the furthest light source. Please refer to the technical info page 283 for more transformer information and performance specifics to choose the best model for your application.

#### Power Feed Canopies

When using a remote transformer, a remote canopy is necessary. Power feed canopies are mounted to the ceiling or wall parallel to a rail run. Location can be anywhere along the rail. 2.75" Round Canopies mount to a special 2" electrical J-Box (included). 4" Round Canopies mount to a standard 4" electrical J-Box with round plaster ring (provided by electrician). Remote canopies include 36" standard length of a 10AWG flexible, plated coaxial power feeder and complementing rail adapter. The coaxial feeder is field-cuttable and easily shortened by the installer. A straight line to the rail, giving the appearance of a solid stem, is easily achievable by the installer. Direct-feed canopies include a complementing rail adapter flush with canopy.

#### monorail single-feed power feed canopies

To be used with any single-feed remote transformer application.

Choices	Model #	Mounts to	Compatible Standoff
- 2.75" -   	REMOTECNPY-(BZ,SC)2	special 2" square electrical box (included)	Telescoping Rigid or Adjustable Cable
- 4.25" - 	REMOTECNPY-(BZ,SC) All dual-feed rail connections are separated by an isolating connector, included (ISOCONNECTORCL-M).	standard 4"square J-Box with round plaster ring (provided by electrician).	Telescoping Rigid or Adjustable Cable

#### monorail dual-feed power feed canopy

To be used with any dual-feed remote transformer application.

Choices	Model #	Mounts to	Compatible Standoff
— 4.25" — (install center of run)	<b>REMOTECNPY-DF-(BZ,SC)</b> All dual-feed rail connections are separated by an isolating connector, included (ISOCONNECTORCL-M).	standard 4" square J-Box with round plaster ring (provided by electrician).	Telescoping Rigid or Adjustable Cable

#### monorail direct power feed canopies

Allows for closest-to-ceiling possible mounting of Monorail.

Choices	Model #	Mounts to	Compatible Standoff
- 4.25" - 2.625"	REMOTECNPYDIR(BZ,SC)	standard 4" square J-Box with round plaster ring (provided by electrician).	Direct feed Telescoping Rigid
- 4.25" - (install center of run)	REMOTECNPYDIRDF(BZ,SC) All dual-feed rail connections are separated by an isolating connector, included (ISOCONNECTORCL-M).	standard 4" square J-Box with round plaster ring (provided by electrician).	Direct feed Telescoping Rigid
- 2.75" - 2.625"	REMOTECNPYDIR2(BZ,SC)	standard 2" square electrical box (included).	Direct feed Telescoping Rigid

# wall monorail power feed canopy

When using a remote transformer, a remote canopy is necessary. Power feed canopies are directly behind a rail run. Location can be anywhere along the rail.

Choices	Model #	Mounts to	Compatible Standoff
— 4" round —	<b>REMOTECNPDIRW-(BZ,SC)</b> wall monorail direct feed canopy	standard 4" square J-Box with round plaster ring (provided by electrician).	wall monorail direct feed standoff

#### Surface Mounted Monorail Transformers

All Surface Mounted Transformers are encased in a finished metal housing and mount to any standard ceiling electrical box. Please refer to the technical info on p.283 for important transformer information and performance specs. Transformer and flexible coaxial feeder cleanly and attractively send power to your system. 36" length is standard for our coaxial feeder. It is easily shortened in the field. Consult factory for longer lengths. Our unique COAXIAL FEEDER mimics a solid stem when straight.

Choices	Watt & Type	Model #	Input	Output	Compatible Dimmer	Compatible Standoffs
- 4.5" - (36" standard length)	12 volt/60W Electronic Flush Single-Feed	TRANS-SFE60-(BZ,SC) TRANS-SFE60-(BZ,SC)/277	1x120VAC/.5A 1x277VAC/.22A	1x60W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 238)
2.5" — (36" standard length)	12 volt/60W Electronic Single-Feed	TRANS-SFE61-(BZ,SC) TRANS-SFE61-(BZ,SC)/277	1x120VAC/.5A x277VAC/.22A	1x60W	Electronic Low-voltage Dimmer	Telescoping Rigid or Adjustable Cable (p. 238)
2.5" — 5.1" — 36" standard length)	12 volt/100W Electronic Single-Feed	TRANS-SFE100-(BZ,SC) TRANS-SFE100-(BZ,SC)/277	1x120VAC/.9A 1x277VAC/.4A	1x100W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 238)
3" 7" - 36" standard length)	12 volt/150W Electronic Single-Feed	TRANS-SFE150-(BZ,SC)	1x120VAC/1.25A	1x150W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 238)
7" — (36" standard length)	12 volt/300W Electronic Single-Feed	TRANS-SFE300-(BZ,SC)	1x120VAC/2.5A	1x300W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 238)
1 — 5.1" — (36" standard length)	12 volt/75W Magnetic Single-Feed	TRANS-SFM75-(BZ,SC) TRANS-SFM75-(BZ,SC)/277	1x120VAC/.7A 1x277VAC/.3A	1x75W	Magnetic Low voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 238)
7" — (36" standard length)	12 volt/150W Magnetic Single-Feed	TRANS-SFM150-(BZ,SC)	1x120VAC/1.25A	1x150W	Magnetic Low voltage Dimmer	Telescoping Rigid or Adjustable Cable (p. 238)
3.75" — 9" — (36" standard length)	12 volt/300W Magnetic Single-Feed 12 volt/300W Magnetic	TRANS-SFM300-(BZ,SC)  TRANS-SFM300-(BZ,SC)/277	1x120VAC/2.5A 1x277VAC/1.1A	1x300W 1x300W	Magnetic Low voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 238)
12V ONLY LED	Single-Feed  24 volt/300W  Magnetic Single-Feed	TRANS-SFM300-(BZ,SC)/24	1x120VAC/2.5A	1x300W		
1 - 11" - (36" standard length install center of run)	12 volt/600W Magnetic Dual-Feed 24 volt/600W Magnetic Dual-Feed	TRANS-SFM600-(BZ,SC) TRANS-SFM600-(BZ,SC)/277	1x120VAC/5A 1x277VAC/2.2A	2x300W 2x300W	Magnetic Low voltage Dimmer 1000W	Telescoping Rigid or Adjustable Cable (p. 238)
1 - 11"- 4" standard length)	24 volt/600W Magnetic Single-Feed	TRANS-SFM600-(BZ,SC)/24	1x120VAC/5A	1x600W	Magnetic Low voltage Dimmer 1000W	Telescoping Rigid or Adjustable Cable (p. 238)

# Direct Feed Monorail Surface Transformers

Allows for the closest possible mounting of Monorail to the ceiling. Each mounts to a standard 4" junction box with round plaster ring.

Choices	Watt & Type	Model #	Input	Output	Compatible Dimmer	Compatible Standoffs
.5" — 4" —	12 volt/60W Electronic Flush Single-Feed	TRANSDIR-SFE60(BZ,SC) TRANSDIR-SFE60(BZ,SC)/277	1x120VAC/.5A x277VAC/.22A	1x60W	Electronic Low-voltage Dimmer 600W	Direct feed Telescoping Rigid
- 5.1" — 4.25" — ED	12 volt/60W Electronic Single-Feed	TRANSDIR-SFE61(BZ,SC) TRANSDIR-SFE61(BZ,SC)/277	1x120VAC/.5A x277VAC/.22A	1x60W	Electronic Low-voltage Dimmer 600W	Direct feed Telescoping Rigid
- 5.1" — 4.25" (LED	12 volt/100W Electronic Single-Feed	TRANSDIR-SFE100(BZ,SC) TRANSDIR-SFE100(BZ,SC)/277	1x120VAC/.9A 1x277VAC/.4A	1x100W	Electronic Low-voltage Dimmer 600W	Direct feed Telescoping Rigid
5.375"	12 volt/150W Electronic Single-Feed	TRANSDIR-SFE150(BZ,SC)	1x120VAC/1.25A	1x150W	Electronic Low-voltage Dimmer 600W	Direct feed Telescoping Rigid
5.375"	12 volt/300W Electronic Single-Feed	TRANSDIR-SFE300(BZ,SC)	1x120VAC/2.5A	1x300W	Electronic Low-voltage Dimmer 600W	Direct feed Telescoping Rigid
- 5.1" - 4.25" LED	12 volt/75W Magnetic Single-Feed	TRANSDIR-SFM75(BZ,SC)  TRANSDIR-SFM75(BZ,SC)/277	1x120VAC/.7A 1x277VAC/.3A	1x75W	Magnetic Low voltage Dimmer 600W	Direct feed Telescoping Rigid
5.375' LED	12 volt/150W Magnetic Single-Feed	TRANSDIR-SFM150(BZ,SC)	1x120VAC/1.25A	1x150W	Magnetic Low voltage Dimmer 600W	Direct feed Telescoping Rigid
6.25" — 9" —	12 volt/300W Magnetic Single-Feed	TRANSDIR-SFE300(BZ,SC) TRANSDIR-SFM300(BZ,SC)/277	1x120VAC/2.5A 1x277VAC/1.1A	1x300W 1x300W	Magnetic Low voltage Dimmer 600W	Direct feed Telescoping Rigid
6.25"	24 volt/300W Magnetic Single-Feed	TRANSDIR-SFM300(BZ,SC)/24	1x120VAC/2.5A	1x300W	Magnetic Low voltage Dimmer 600W	Direct feed Telescoping Rigid
6.25" (install in center of run)	12 volt/600W Magnetic Dual-Feed	TRANSDIR-SFM600(BZ,SC)	1x120VAC/5A	2x300W	Magnetic Low voltage Dimmer 1000W	Direct feed Telescoping Rigid
6.25"	24 volt/600W Magnetic Single-Feed	TRANSDIR-SFM600(BZ,SC)/24V	1x120VAC/5A	1x600W	Magnetic Low voltage Dimmer 1000W	Direct feed Telescoping Rigid

These transformers are compatible with LED Heads and Pendants.

#### Combines the aesthetics of Remote Transformers and Power Feed Canopies with the flexibility of Surface Transformers


- Looks similar from below the ceiling to the power feed canopies used with remote transformers; however, it does not require access to a remote location because the transformer sits just above the ceiling
- The decorative canopy is the only visible portion of the transformer once installed
- Access to the back of the ceiling is not needed

#### **Easy installation**

- Installs similar to a remodel recessed downlight
- In remodel applications, the electrician will need to install the Remodel Recessed Transformer in close proximity to an existing junction box, drill through the finished ceiling in the location where the Remodel Recessed Transformer will be installed, and cover the existing junction box with a thin, field-paintable metal cover (included) as the NEC requires
- In new construction, the electrician can simply bring power to the Remodel Recessed Transformer directly
- Insulation must be kept at least 3" from the transformer and housing (non-IC)

# The transformer is concealed inside a housing that recesses above the ceiling

- Available with a 150 watt or 300 watt electronic transformer
- -The transformer is equipped with a fast-acting short circuit and overload protection that will safely turn off the system should a short or overload occur
- The unit can be reset simply by flipping the wall switch off and on
- Dimmable with a 600w low-voltage electronic dimmer

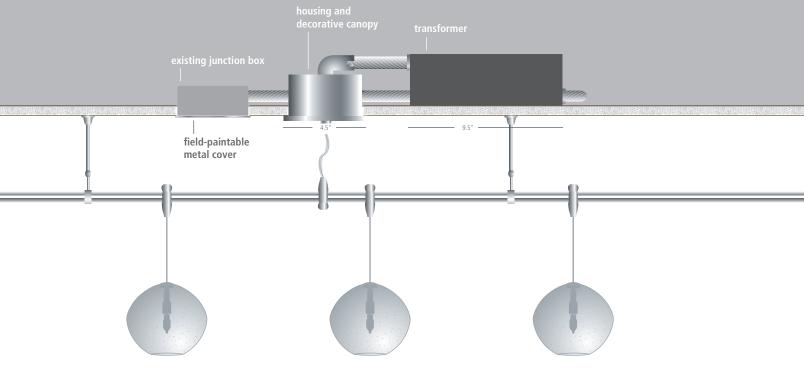

#### Remodel Recessed Transformer

150 watt Electronic can power lamps totaling up to 150 watts. 300 watt Electronic can power lamps totaling up to 300 watts.

	<b>150-</b> 150w electronic <b>300-</b> 300w electronic		
model TRANS-RRE	wattage 150-	finish SC	
		BZ bronze SC satin nickel	



## Pre-Configured Monorail Kits



Soft Curve Monorail Kit | Monorail Bare Head Swivel II Heads

#### soft curve kit (shown above)

- (2) 46" soft curve rails (78" diameter, 1/5 round, 39" radius)
- (1) set of four end caps
- (1) set of straight conductive connectors
- (3) telescoping rigid standoffs (6-10")
- (1) surface mount transformer housing with (1) 300W electronic transformer and 36" flexible coaxial feeder cable Option: Add a set of adjustable angle connectors

#### FUSIONKIT(BZ,SC)8CV

#### 24" diameter circle kit

- (3) 20" curved rails (24" diameter, 1/3 round, 12" radius)
- (1) set of four end caps
- (3) sets of straight conductive connectors
- (3) telescoping rigid standoffs (6-10")
- (1) surface mount transformer housing with (1) 300W telectronic transformer and 36" flexible coaxial feeder cable

#### FUSIONKIT(BZ,SC)2RD

## straight rail kit

- (2) 48" straight rails
- (1) set of four end caps
- (1) set straight connectors
- (3) telescoping rigid standoffs (6-10")
- (1) surface mount transformer housing with (1) 300W electronic transformer and 36" flexible coaxial feeder cable Option: Add a set of adjustable angle, "T" or "X" connectors\*
- \* To create "T" and "X" shapes, rail must be cut. Rail is easily field-cuttable.

#### FUSIONKIT(BZ,SC)8ST

#### 48" diameter circle kit

- (3) 40.5" curved rails (48" diameter, 1/3 round)
- (1) set of four end caps
- (3) sets of straight conductive connectors
- (4) telescoping rigid standoffs (6-10")
- (1) surface mount transformer housing with (1) 300W electronic transformer and 36" flexible coaxial feeder cable

#### FUSIONKIT(BZ,SC)4RD





#### design your monorail system



When designing your LED Illuminated Monorail system, the first step is to determine what you would like to light. Choose your decorative elements (fixtures) and where they should be installed to put the light where you want it. For a visual reference of the elements available, refer to pp. 10-13. You will see a thumbnail image of the element as well as a page number indicating where to find detailed ordering information. Some elements may be customized by adding decorative and functional accessories. Remember to specify the MR2 mount.



Layout your LED Illuminated Monorail run. Rail can be installed straight or can be field-bent to create an organic shape or follow architectural details. Once your layout is complete, measure the length of the run to determine the quantity and length of LED Illuminated Monorail sections required (p. 250).

#### add power and hardware to complete your system



Determine how far from the ceiling that you would like to position the system. Use Telescoping Rigid Standoffs for curvy runs or if you want the ability to fine-tune the drop from the ceiling without any cutting (p. 252). Adjustable cable standoffs offer a minimal appearance (p. 252). For wall-mounted applications specify LED Illuminated Wall Monorail standoffs. Remember to space standoffs no more than every 3 feet.




Add LED generators (p. 251). Each end of the run needs a single-ended generator. An additional dual-ended generator would be used to expand your rail runs past 16'.




Selecting a transformer is as easy as adding up the total wattage of all the lamps you will be using on the system. Remember to add 5 watts for each single LED generator and 10 watts for each dual LED generator. Remote transformers with Power Feed canopies offer a minimal appearance. Surface transformers may be installed over an existing junction box. Remember when using LED heads and pendants to choose a transformer that is LED compatible. Use the information on pp. 254, 256-257 to help you choose the correct transformer for your design.

#### LED illuminated monorail

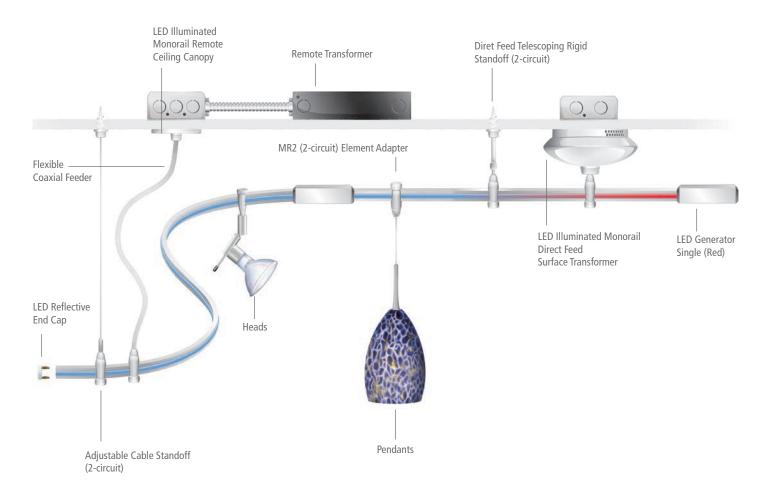

#### LED Illuminated wall monorail

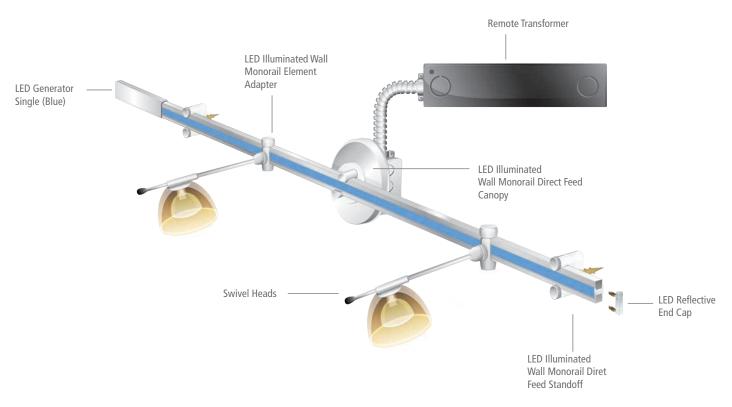



LED Illuminated Monorail with Red Generator | LED Illuminated Monorail Lava II Pendants in Tortoise

# straight rail

Straight Monorail with open center channel for fiber optic cable (fiber optic cable sold separately). All pieces are field-cuttable and bendable to a horizontal radius as small as 12 inches.

	BZ bronze SC satin nic	BZ bronze SC satin nickel		
model RAIL-ST-	finish SC	length 96-LED		
	•	<b>96-LED</b> 96" long		



# fiber optic cable

Sold per foot. Order length of cable to match run length plus one additional foot.

#### **LEDMRLFIBER**

#### LED Illuminated Monorail Generators

Recommended every 16 feet. LED Generators may be chosen as single or dual-ended light sources. Each end of the rail needs a single-ended generator. An additional dual-ended generator would be used to expand your rail runs past 16'. Mix colors with (2) different colored single-ended generators. Use a different color dual-ended generator to continue with additional lengths of rail.

#### LED generator single

Single-ended 5W LED generator. Must be used on at least one end of a run.

	AM amber BU blue GR green RD red WH white RG RGB color-changing		
model <b>LEDMRLE</b>	color <b>AM</b>	finish  SC  BZ bronze SC satin nickel	
		1 Se satir meker	

#### LED generator dual

Dual-ended 10W LED generator. Allows for extending a rail run beyond 32 feet.

Dadi Cilaca 1011	LLD gener	atol. / (110 113 101 1	exterialing a rai	Truit beyond .	J2 1000.
	AM ambe BU blue GR green RD red WH white RG RGB o				
model	color	finish			
LEDMRLC	AM	SC			7
		BZ bronze SC satin nickel	_		
		i SC Satiil Hickel	_		

#### LED Illuminated Monorail Connectors

#### straight conductive

Straight conductive connectors join sections of LED Illuminated Monorail together. (Pair.) Included with each piece of rail.



#### LED end cap

Decorative reflective cap to give a finished look to the ends of LED Illuminated Monorail.



#### straight isolating

Straight isolating connectors join sections of rail and isolate one powered run from another. (Pair.) These are typically used to separate one circuit from the other circuit when using surface or remote dual-feed transformers and to separate multiple transformers on a continuous run. Included with dual-feed surface transformers and power feed canopies. (See pp. 254-256.)



#### LED Illuminated Monorail Standoffs

Choose your LED Illuminated Monorail supports Recommended every 3 feet. Versatile, telescoping standoffs allow you to choose your hanging method and height.

#### telescoping rigid standoffs

(specify with Surface Mounted Transformers or Power Feed Canopies) Rigid standoffs offer multifunction ceiling mounting in one part. Unique telescoping height adjustment simplifies and perfects your installation. Self-drilling drywall anchor included with all standoffs. **NOTE:** When mounting on concrete ceiling or wall, order one SCW-MASONRY-A per standoffs

	BZ bronze SC satin nickel	
model HANGER-ADJ-	finish SC	-1-2
*When using with any surface mounted transformer with HANGER-ADJ-SC-1-2, rail cannot be installed directly below the transformer		-1 2.5" -4" * -2 6" -10" -3 12" -24" -4 24" -48" -5 48" -96"





**NOTE:** Specify Surface Mounted Transformer or non-Direct Power Feed Canopy with Adjustable Cable or Telescoping Rigid Standoffs.Refer to pp. 255-256.

#### adjustable cable standoffs

Clean looking and fully adjustable cable standoff for ceiling mounting. Griplock allows for easy one-touch shortening or lengthening in the field. Offered in four stock lengths. Additional custom length cable can be specified. Self-drilling drywall anchor included with all standoffs.

	BZ bronze SC satin nickel		
model HANGER-CBL-	finish <b>BZ</b>	-6-2	
		-6 -8	6' of cable 8' of cable
		-18 -25	18' of cable 25' of cable



# direct feed telescoping rigid standoffs Universal telescoping standoffs offer adjustability and simplified ordering.

Universal for **all** LED Illuminated Monorail direct feed surface transformers except 60w electronic flush.

	BZ1-2 bronze SC1-2 satin nickel
model HANGERDIRADJ	finish SC1-2

Universal for all LED Illuminated Monorail direct power feed canopies and 60w electronic flush direct feed surface transformer.

	BZ1-2 bronze SC1-2 satin nickel
model HANGERDIRRC	finish SC1-2





**NOTE:** Specify Direct Feed Surface Transformer or Direct Power Feed Canopy with Direct Feed Telescoping Rigid Standoffs. Refer to pp. 255, 257.

#### LED Illuminated Monorail Special Installations

#### ball joint

Attachment allows sloped ceiling mounting. Adapts simply to any telescoping rigid standoff (not included).

	BZ bronze SC satin nicke
model	finish
BI-ADI-	SC



#### t-grid clip

Allows adaptation of any standoff to an inverted T-Grid ceiling rail. To be used with 15/16" (1) or 9/16" (2) T-Grid.

	<b>1</b> 15/16" grid <b>2</b> 9/16" grid	9
model CLIP-TB/MONO-	size	



#### LED Illuminated Wall Monorail

#### wall monorail direct feed standoff

Recommended every 3 feet. Versatile, telescoping standoffs allow you to choose your hanging method and height. Supports the rail and positions in approximately 1" off the wall.

	BZ-LED bronze SC-LED satin nickel
model HANGERDIRW-	finish SC-I FD
HAINGENDINW-	3C-LED



#### wall monorail element adapter

One adapter is required for each swivel head.

	BZ-LED bronze SC-LED satin nickel	
model RAILADAP-WALL	finish SC-LED	Te

#### LED Illuminated Monorail Remote Transformers

All Remote Transformers are encased in metal housings complete with mounting feet and conduit knockouts. Typically, you use a remote transformer when a cleaner installation appearance is desired. A remote transformer must be installed in an accessible remote location, the bulkier ceiling mounted surface transformer is replaced by a power feed canopy with flexible coaxial power feed cable or direct-feed connector. Please refer to the technical info on p.283 for important transformer information and performance specs.

Choices	Watt & Type	Model #	Input	Output	Compatible Dimmer
1.75"/ 8.25" 2"	12 volt/150W Remote DC Electronic Single-Feed	TRANS-RMTE-150	1x120VAC/1.25A	1x150W	Electronic Low-voltage Dimmer, 600W
2"/ 8.5" 3.5"	12 volt/300W Remote DC Electronic Single-Feed	TRANS-RMTE-301	1x120VAC/2.5A	1x300W	Electronic Low-voltage Dimmer, 600W
5"	12 volt/75W Remote Magnetic Single-Feed	TRANS-RMTE-75M REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/.7A	1x75W	Magnetic Low-voltage Dimmer, 600W
9.5" LED	12 volt/75W Remote Magnetic Single-Feed	TRANS-RMTE-75M/277	1x277VAC/.3A	1x75W	Magnetic Low-voltage Dimmer, 600W
5"	12 volt/150W Remote Magnetic Single-Feed	TRANS-RMTE-150M REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/1.25A	1x150W	Magnetic Low-voltage Dimmer, 600W
9.5° LED	12 volt/150W Remote Magnetic Single-Feed	TRANS-RMTE-150M/277	1x277VAC/.55A	1x150W	Magnetic Low-voltage Dimmer, 600W
	12 volt/300W Remote Magnetic Single-Feed	TRANS-RMTE-300M REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/2.5A	1x300W	Magnetic Low-voltage Dimmer, 600W
9.5" LED	12 volt/300W Remote Magnetic Single-Feed	TRANS-RMTE-300M/277	1x277VAC/1.1A	1x300W	Magnetic Low-voltage Dimmer, 600W
6"	12 volt/600W Remote Magnetic Dual-Feed	TRANS-RMTE-600M REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/5A	2x300W	Magnetic Low-voltage Dimmer, 1000W
10.5"	12 volt/600W Remote Magnetic Dual-Feed	TRANS-RMTE-600M/277	1x277VAC/2.2A	2x300W	Magnetic Low-voltage Dimmer, 1000W
12v only LED					

These transformers are compatible with LED Heads and Pendants.

ALL Remote Transformers must be accompanied by a Remote Canopy. The Remote Canopy covers the ceiling/wall electrical box and is equipped with a 36" flexible coaxial power feeder (see page 255). When using Dual-Feed, Transformers with LED Illuminated Wall Monorail, two Remote canopies and one isolating connector are required.

#### How to calculate your wattage needs

2.75" and 4" remote canopies are available for ceiling and wall remote transformer applications. To find which is right for your system, add up the total wattage of the pendants or heads you'll be using (the number of pendants or heads x the total lamp wattage per fixture = total wattage). A combination of wattages may be chosen as long as the maximum wattage allowed by the transformer is not exceeded. For example (3) 50 watt, (4) 35 watt or (7) 20 watt elements can be specified per 150 watt transformer. (6) 50 watt, (8) 35 watt or (15) 20 watt elements can be specified per 300 watt transformer. Double a 300 watt limit for 600 watts.

Additional Important Transformer Information: Aside from wattage requirements and accessibility, the other important factor to consider when choosing a transformer is "voltage drop." The further a light source (pendant/head) is located from the transformer, the lower its voltage and brightness. Certain transformers are better suited to handle longer rail runs and distances from the transformer to the furthest light source. Please refer to the technical info page 283 for more transformer information and performance specifics to choose the best model for your application.

#### LED Illuminated Monorail Power Feed Canopies

When using a remote transformer, a remote canopy is necessary. Power feed canopies are mounted to the ceiling or wall parallel to a rail run. Location can be anywhere along the rail. **2.75" Round Canopies** mount to a special 2" electrical J-Box (included). **4" Round Canopies** mount to a standard 4" electrical J-Box with round plaster ring (provided by electrician). Remote canopies include 36" standard length of a 10AWG flexible, plated coaxial power feeder and complementing rail adapter. The coaxial feeder is field-cuttable and easily shortened by the installer. A straight line to the rail, giving the appearance of a solid stem, is easily achievable by the installer. Direct-feed canopies include a complementing rail adapter flush with canopy.

#### LED illuminated monorail single-feed power feed canopies

To be used with any single-feed remote transformer application.

Choices	Model #	Mounts to	Compatible Standoff
- 2.75" -   	REMOTECNPY-(BZ,SC)-2-LED	special 2" square electrical box (included)	Telescoping Rigid or Adjustable Cable
- 4.25" - 	REMOTECNPY-(BZ,SC)-LED	standard 4" square J-Box with round plaster ring (provided by electrician).	Telescoping Rigid or Adjustable Cable

#### LED illuminated monorail dual-feed power feed canopy

To be used with any dual-feed remote transformer application.

Choices	Model #	Mounts to	Compatible Standoff
— 4.25" — (install center of run)	REMOTECNPY-DF-(BZ,SC)-LED All dual-feed rail connections are separated by an isolating connector, included (ISOCONNECTORCL-M).	standard 4" square J-Box with round plaster ring (provided by electrician).	Telescoping Rigid or Adjustable Cable

#### LED illuminated monorail direct power feed canopies

Allows for closest-to-ceiling possible mounting of Monorail. Specify with Remote Transformers.

Choices	Model #	Mounts to	Compatible Standoff
- 4.25" - 2.625"	REMOTECNPYDIR(BZ,SC)-LED	standard 4" square J-Box with round plaster ring (provided by electrician).	Direct feed Telescoping Rigid
- 4.25" -     2.625"	REMOTECNPYDIRDF2(BZ,SC)-LED	standard 4" square J-Box with round plaster ring (provided by electrician).	Direct feed Telescoping Rigid
— 2.75" — 2.625" (install center of run)	REMOTECNPYDIRF(BZ,SC)-LED All dual-feed rail connections are separated by an isolating connector, included (ISOCONNECTORCL-M).	standard 2" square electrical box (included).	Direct feed Telescoping Rigid

#### LED illuminated wall monorail power feed canopy

When using a remote transformer, a remote canopy is necessary. Power feed canopies are directly behind a rail run. Location can be anywhere along the rail.

Choices	Model #	Mounts to	Compatible Standoff
— 4" round —	REMOTECNPDIRW-(BZ,SC)-LED wall monorail direct feed canopy	standard 4" square J-Box with round plaster ring (provided by electrician).	wall monorail direct feed standoff

#### LED Illuminated Monorail Surface Mounted Transformers

All Surface Mounted Transformers are encased in a finished metal housing and mount to any standard ceiling electrical box. Please refer to the technical info on p. 283 for important transformer information and performance specs. Transformer and flexible coaxial feeder cleanly and attractively send power to your system. 36" length is standard for our coaxial feeder. It is easily shortened in the field. Consult factory for longer lengths. Our unique COAXIAL FEEDER mimics a solid stem when straight.

Choices	Watt & Type	Model #	Input	Output	Compatible Dimmer	Compatible Standoffs
- 4.5" - (36" standard length)	12 volt/60W Electronic Flush Single-Feed	TRANS-SFE60-(BZ,SC)-LED TRANS-SFE60-(BZ,SC)-LED/277	1x120VAC/.5A 1x277VAC/.22A	1x60W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 252)
2 .5" — (36" standard length)	12 volt/60W Electronic Single-Feed	TRANS-SFE61-(BZ,SC)-LED TRANS-SFE61-(BZ,SC)-LED/277	1x120VAC/.5A x277VAC/.22A	1x60W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 252)
2 .5" — (36" standard length)	12 volt/100W Electronic Single-Feed	TRANS-SFE100-(BZ,SC)-LED TRANS-SFE100-(BZ,SC)-LED/277	1x120VAC/.9A 1x277VAC/.4A	1x100W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 252)
7" - 7" - (36" standard length)	12 volt/150W Electronic Single-Feed	TRANS-SFE150-(BZ,SC)-LED	1x120VAC/1.25A	1x150W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 252)
7" - 7" - (36" standard length)	12 volt/300W Electronic Single-Feed	TRANS-SFE300-(BZ,SC)-LED	1x120VAC/2.5A	1x300W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 252)
2.5" — (36" standard length)	12 volt/75W Magnetic Single-Feed	TRANS-SFM75-(BZ,SC)-LED TRANS-SFM75-(BZ,SC)-LED/277	1x120VAC/.7A 1x277VAC/.3A	1x75W	Magnetic Low voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 252)
7" — 7" — (36" standard length)	12 volt/150W Magnetic Single-Feed	TRANS-SFM150-(BZ,SC)-LED	1x120VAC/1.25A	1x150W	Magnetic Low voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 252)
3.75" — 9" — (36" standard length)	12 volt/300W Magnetic Single-Feed	TRANS-SFM300-(BZ,SC)-LED	1x120VAC/2.5A	1x300W	Magnetic Low voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable (p. 252)
12V ONLY LED	12 volt/300W Magnetic Single-Feed	TRANS-SFM300-(BZ,SC)-LED/277	1x277VAC/1.1A	1x300W	33077	(p. 232)
- 11"- 4" (36" standard	12 volt/600W Magnetic Dual-Feed	TRANS-SFM600-(BZ,SC)-LED	1x120VAC/5A	2x300W	Magnetic Low voltage Dimmer 1000W	Telescoping Rigid or Adjustable Cable (p. 252)
ength install center of run)	12 volt/600W Magnetic Dual-Feed	TRANS-SFM600-(BZ,SC)-LED/277	1x277VAC/1.1A	2x300W	100000	(p. 232)

#### LED Illuminated Monorail Direct Feed Surface Transformers

Allows for the closest possible mounting of Monorail to the ceiling. Each mounts to a standard 4" junction box with round plaster ring.

Choices	Watt & Type	Model #	Input	Output	Compatible Dimmer	Compatible Standoffs
.5" — 4" —	12 volt/60W Electronic Flush Single-Feed	TRANSDIRSFE60(BZ,SC)-LED/277	1x120VAC/.5A 1x277VAC/.22A	1x60W	Electronic Low-voltage Dimmer 600W	Direct Feed Telescoping Rigid
4.25" — 5.1" —	12 volt/60W Electronic Single-Feed	TRANSDIRSFE61(BZ,SC)-LED/277	1x120VAC/.5A x277VAC/.22A	1x60W	Electronic Low-voltage Dimmer 600W	Direct Feed Telescoping Rigid
4.25" — 5.1" — LED	12 volt/100W Electronic Single-Feed	TRANSDIRSFE100(BZ,S)-LED TRANSDIR-SFE100(BZ,SC)-LED/277	1x120VAC/.9A 1x277VAC/.4A	1x100W	Electronic Low-voltage Dimmer 600W	Direct Feed Telescoping Rigid
5.375" - 7" -	12 volt/150W Electronic Single-Feed	TRANSDIRSFE150(BZ,SC)-LED	1x120VAC/1.25A	1x150W	Electronic Low-voltage Dimmer 600W	Direct Feed Telescoping Rigid
5.375"	12 volt/300W Electronic Single-Feed	TRANSDIRSFE300(BZ,SC)-LED	1x120VAC/2.5A	1x300W	Electronic Low-voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable
- 5.1" - 4.25"	12 volt/75W Magnetic Single-Feed	TRANSDIRSFM75(BZ,SC)-LED  TRANSDIR-SFM75(BZ,SC)-LED/277	1x120VAC/.7A 1x277VAC/.3A	1x75W	Magnetic Low voltage Dimmer 600W	Telescoping Rigid or Adjustable Cable
5.375' EED	12 volt/150W Magnetic Single-Feed	TRANSDIRSFM150(BZ,SC)-LED	1x120VAC/1.25A	1x150W	Magnetic Low voltage Dimmer 600W	Direct Feed Telescoping Rigid
- 11"- 6.25"	12 volt/300W Magnetic Single-Feed	TRANSDIRSFM300(BZ,SC)-LED TRANSDIRSFM300(BZ,SC)-LED/277	1x120VAC/2.5A 1x277VAC/1.1A	1x300W 1x300W	Magnetic Low voltage Dimmer 600W	Direct Feed Telescoping Rigid
6.25" (install center of run)	12 volt/600W Magnetic Single-Feed	TRANSDIRSFM600(BZ,SC)-LED TRANSDIRSFM600(BZ,SC)-LED/277	1x120VAC/5A 1x277VAC/2.2A	2x300W	Magnetic Low voltage Dimmer 600W	Direct Feed Telescoping Rigid

These transformers are compatible with LED Heads and Pendants.





#### design your 2-Circuit Monorail system



When designing your 2-Circuit Monorail system, the first step is to determine what you would like to light. Choose your decorative elements (fixtures), where they should be installed to put the light where you want it, and which elements will be controlled by each circuit. The placement of the conductive metal screw in the element's system adapter determines which circuit controls the element. For a visual reference of the elements available, refer to pp. 10-13. You will see a thumbnail image of the element as well as a page number indicated where to find detailed ordering information. Some elements may be customized by adding decorative and functional accessories.



Layout your 2-Circuit Monorail run. Rail can be installed straight or can be field-bent to create an organic shape or follow architectural details. We also offer pre-bent 2-Circuit Monorail options for added flexibility. Once your layout is complete, measure the length of the run to determine the quantity and length of 2-Circuit Monorail sections required (p. 262). Finish your run with a set of End Caps (p. 263).


#### add power and hardware to complete your system



Determine how far from the ceiling that you would like to position the system. Use Telescoping Rigid Standoffs for curvy runs or if you want the ability to fine-tune the drop from the ceiling without any cutting (p. 264). Adjustable cable standoffs offer a minimal appearance (p. 264).



Selecting a transformer is as easy as adding up the total wattage of all the lamps you will be using on the system. Each transformer features two independent 120 or 277 volt circuits that may be switched independently. 24 volt transformers cannot be used with 2-Circuit Monorail. Remote transformers with Power Feed canopies offer a minimal appearance. Surface transformers may be installed over an existing junction box. Remember when using LED heads and pendants to choose a transformer that is LED compatible. Use the infomation on pp. 266, 268 to help you choose the correct transformer for your design.

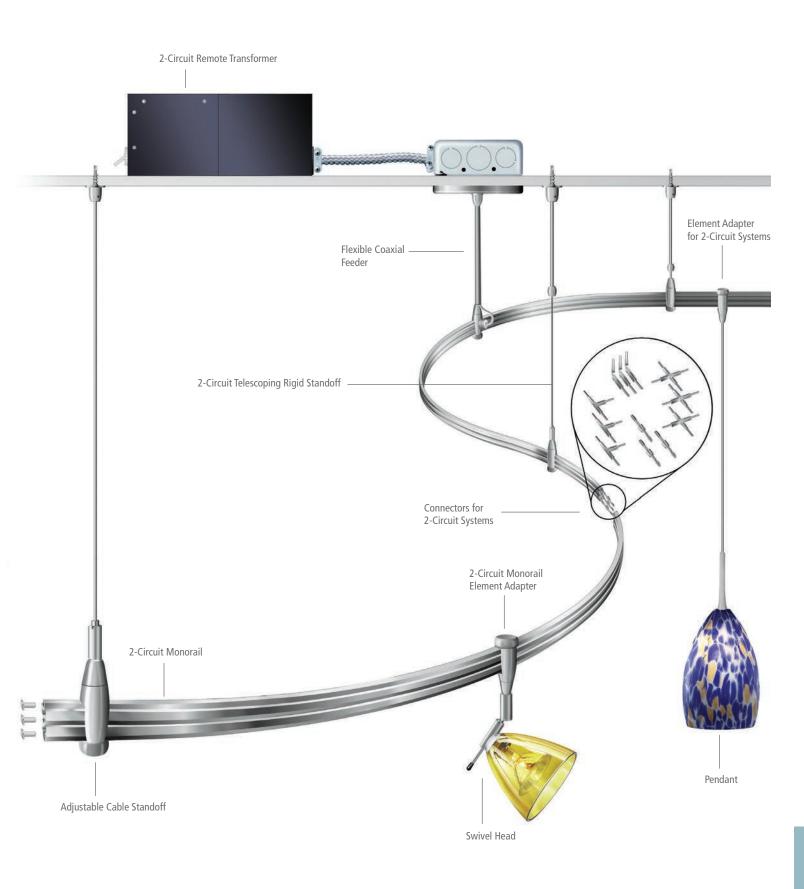


#### 2-Circuit Monorail

#### 2-circuit monorail

Hand-bendable, field-cuttable 2-Circuit Monorail is rated for 300 watts per circuit at 12 volts. Each piece of rail is shipped with conductive connectors to join rail pieces end to end. Order additional connectors if cutting and rejoining rails.

	BZ bronz	
model RAIL-ST-	finish SC	length 96-2
		<b>48-2</b> 48" long <b>96-2</b> 96" long

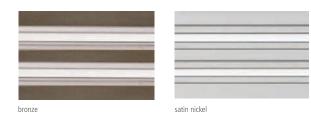

#### 24" diameter circle

1/3 Round, Radius 12" . Order three pieces to create a 24" diameter circle. 20.5" 1/3 Round Curve.



	BZ62.5-2 bronze SC62.5-2 satin nicke
model	finish
RAILCV3-	SC62.5-2

#### 48" diameter circle

1/3 Round, Radius 24" . Order three pieces to create a 48" diameter circle. 40.5" 1/3 Round Curve.



	BZ125-2 bronze SC125-2 satin nicke
model	finish
RAILCV2-	SC125-2

#### soft curve

78" Diameter, 1/5 Round, Radius 39". Order five pieces to create a 78" diameter circle. 46" 1/5 Round Curve.



	BZ117-2 bronze SC117-2 satin nickel
model	finish
RAILCV1-	SC117-2

straight conductive
Straight conductive connectors join sections of 2-Circuit Monorail together. (Set of three.) Included with each piece of rail.



#### straight isolating

Straight isolating connectors join sections of rail and isolate one powered run from another. (Set of three.) These are typically used to separate one circuit from the other circuit when using surface or remote dual-feed transformers and to separate multiple transformers on a continuous run. Included with dual-feed surface transformers and power feed canopies. (See pp. 267-268.)



#### Connectors continued

#### "t" conductive

These conductive connectors join three sections of 2-Circuit Monorail together to create a "T". (set of three.) We recommend standoffs are

placed no more than 6" away from the connector.



BZ-M-2 bronze SC-M-2 satin nickel **TCONNECTOR** SC-M-2

#### adjustable angle conductive

These connectors join sections of 2-Circuit Monorail together allowing subtle to sharp horizontal angles. (set of three.)



BZ-M-2 bronze SC-M-2 satin nickel ACONNECTOR | SC-M-2

#### "x" conductive

These conductive connectors join four sections of 2- Circuit Monorail together to create a four-way intersection. (set of three.) We recommend standoffs are placed no more than 6" away from the connector.



**XCONNECTOR** | SC-M-2

#### end caps

Decorative metal cap to give finished look to the ends of 2-Ciruit Monorail. (6 pc. set.)



BZ-M-2 bronze SC-M-2 satin nickel **ENDCAPS-**SC-M-2

#### adjustable angle vertical connector

These connectors join sections of 2-Circuit Monorail together allowing subtle vertical angles.



BZ-M-2 bronze SC-M-2 satin nickel **VCONNECTOR** SC-M-2

#### Standoffs

Recommended every 3 feet. Versatile, telescoping standoffs allow you to choose your hanging method and height.

#### telescoping rigid standoffs

Rigid standoffs offer multifunction ceiling mounting in one part. Unique telescoping height adjustment and rotational head insert simplifies and perfects your installation. Self-drilling drywall anchor included with all standoffs. **NOTE:** When mounting on concrete ceiling or wall, order one SCW-MASONARY-A per standoff.

	BZ bronz SC satin	
model HANGER-ADJ-	finish SC	-1-2
*When using with any surface mounted transformer, rail cannot be installed directly below the transformer.		-1 2.5" -4" * -2 6" -10" -3 12" -24" -4 24" -48"





**NOTE:** Specify Surface Mounted Transformer or non-Direct Power Feed Canopy with Adjustable Cable or Telescoping Rigid Standoffs.Refer to pp. 267-268.

#### adjustable cable standoffs

Clean looking and fully adjustable cable standoff for ceiling mounting. Griplock allows for easy one-touch shortening or lengthening in the field. Offered in four stock lengths. Additional custom length cable can be specified. Self-drilling drywall anchor included with all hangers.

	BZ bronze SC satin nickel	
model HANGER-CBL-	finish BZ	-6-2
		-6-2 6' of cable -8-2 8' of cable -18-2 18' of cable -25-2 25' of cable



## direct feed telescoping rigid standoffs

Universal telescoping standoffs offer adjustability and simplified ordering.

Universal for **all** 2-circuit direct feed surface transformers.

	BZ1-2 bronze SC1-2 satin nickel
model	finish
HANGERDIRADJ	SC1-2

Universal for **all** 2-circuit direct power feed canopie.

	BZ1-2 bronze SC1-2 satin nickel
model HANGERDIRRC	finish SC1-2





**NOTE:** Specify Direct Feed Surface Transformer or Direct Power Feed Canopy with Direct Feed Telescoping Rigid Standoffs. Refer to pp. 267, 268.

# Special Installations

#### ball joint

Attachment allows sloped ceiling mounting. Adapts simply to any telescoping rigid standoff (not included).

	BZ bronze SC satin nickel	1
model BJ-ADJ-	finish SC	



Allows adaptation of any standoff to an inverted T-Grid ceiling rail. To be used with 15/16" (1) or 9/16" (2) T-Grid.

	- <b>1</b> 15/16" grid - <b>2</b> 9/16" grid	0
model CLIP-TB/MONO	size	Ψ

coaxial feeder cover (Optional)
Field-cuttable .5" diameter cover in plated finish slips over flexible feeder cable to form a solid line from power source to rail. Available in 48" or 96" lengths. Recommended for improved appearance.

		-BZ bronze -SC satin nickel
model FDRCVR-	length 48-2	finish -BZ
	<b>48-2</b> 48" lo	



# 2-CIRCUIT MONORAIL

#### Remote Transformers

All 2-circuit remote transformers are encased in metal housings complete with mounting feet and conduit knockouts. Typically, you use a remote transformer when a cleaner installation appearance is desired. A remote transformer must be installed in an accessible remote location, the bulkier ceiling mounted surface transformer is replaced by a power feed canopy with flexible coaxial power feed cable and 2-circuit wire or direct feed connector. Please refer to the technical info on page 283 for important transformer information and performance specs.

Choices	Watt & Type	Model #	Input	Output	Compatible Dimmer
5" 9" LED	12 volt/ 150 watt Remote Magnetic Single-Feed	TRANS-RMTE-150M-2 REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/2x.7A Consists of two independant primaries.	2x75W	Up to (2) Magnetic Low-voltage Dimmer 600W
5"   5"   ED	12 volt/ 300 watt Remote Magnetic Single-Feed	TRANS-RMTE-300M-2 REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x120VAC/2x1.25A  Consists of two independant primaries.	2x150W	Up to (2) Magnetic Low-voltage Dimmer 600W
5" LED	12 volt/ 600 watt Remote Magnetic Single-Feed	TRANS-RMTE-600M-2 REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	2x120VAC/2x2.5A Consists of two independant primaries.	2x300W	Up to (2) Magnetic Low-voltage Dimmer 600W
6"   10" LED	12 volt/ 600 watt Remote Magnetic Single-Feed	TRANS-RMTE-600M-2/277 REFER TO PAGE 283 FOR PERFORMANCE SPECIFICATIONS.	1x277 VAC/2x1.1A Consists of two independant primaries.	2x75W	Up to (2) Magnetic Low-voltage Dimmer 600W

**LED** These transformers are compatible with LED Heads and Pendants.

ALL Remote Transformers must be accompanied by a remote canopy. The remote canopy covers the ceiling/wall electrical box and is equipped with a 36" flexible coaxial power feeder (see page 267).

#### How to calculate your wattage needs

4" remote canopies are available for ceiling and wall remote transformer applications. To find which is right for your system, add up the total wattage of the pendants or heads you'll be using (the number of pendants or heads times the total lamp wattage per fixture = total wattage). A combination of wattages may be chosen as long as the maximum wattage allowed by the transformer is not exceeded. For example (6) 50 watt, (8) 35 watt or (14) 20 watt elements can be specified per 300 watt transformer. (12) 50 watt, (16) 35 watt or (30) 20 watt elements can be specified per 600 watt transformer. Double a 600 watt limit when using (2) 600 watt transformers and a dual-feed canopy.

#### **Additional Important Transformer Information:**

Aside from wattage requirements and accessibility, the other important factor to consider when choosing a transformer is "voltage drop." The further a light source (pendant/head) is located from the transformer, the lower its voltage and brightness. Certain transformers are better suited to handle longer rail runs and distances from the transformer to the furthest light source. Please refer to the technical info page 283 for more transformer information and performance specifics to choose the best model for your application.

LBL

#### Power Feed Canopies

When using a remote transformer, a remote canopy is necessary. Power feed canopies are mounted to the ceiling or wall parallel to a rail run. Location can be anywhere along the rail.

**4" Round Canopies** mount to a standard 4" electrical J-Box with round plaster ring (provided by electrician). 2-circuit remote canopies include 36" standard length of a 10AWG flexible coaxial power feeder, a 2-circuit wire and complementing rail adapter. The coaxial feeder and 2-circuit wire are field-cuttable and easily shortened by the installer. A straight line to the rail, giving the appearance of a solid stem, is easily achievable by the installer. We recommend a coaxial feeder 2-circuit wire cover (FDRCVR-48-2-(BZ,SC) or (FDRCVR-96-2-(BZ,SC) for improved appearance. Direct Feed Canopies include a complementing rail adapter flush with the canopy.

#### Power Feed Canopies To be used with any 2x75W, 2x150W and 2x300W remote transformer applications.

Choices	Model #	Mounts to	Compatible Standoff
— 4.25° —	REMOTECNPY-(BZ,SC)-2C	standard 4" electrical J-Box with round plaster ring (provided by electrician).	Telescoping Rigid or Adjustable Cable

#### dual-feed power feed canopies To be used with any 2x600W (4x300W) remote transformer applications.

Choices	Model #	Mounts to	Compatible Standoff
— 4.25° —	REMOTECNPY-DF-2C-(BZ,SC)	standard 4" electrical J-Box with round plaster ring (provided by electrician).	Telescoping Rigid or Adjustable Cable

A 2-circuit rail installation using (2) TRANS-RMTE-150M-2, TRANS-RMTE-300M-2 or (2) TRANS-RMTE-600M-2 must be separated by an isolating connector (ISOCONNECTORCL-M-2 included).

#### direct power feed canopies Allows for closest-to-ceiling possible mounting of 2-Circuit Monorail. Specify with Remote Transformers.

Choices	Model #	Mounts to	Compatible Standoff
2.625"	REMOTECNPYDIR(BZ,SC)-2C  Single-Feed, Direct Power Feed Canopy	standard 4" electrical J-Box with round plaster ring (provided by electrician).	Telescoping Rigid or Adjustable Cable
- 4.25" -     2.625"	REMOTECNPYDIRDF(BZ,SC)-2C  Single-Feed, Direct Power Feed Canopy	standard 4" electrical J-Box with round plaster ring (provided by electrician).	Telescoping Rigid or Adjustable Cable

A 2-circuit rail installation using (2) TRANS-RMTE-150M-2, TRANS-RMTE-300M-2 or (2) TRANS-RMTE-600M-2 must be separated by an isolating connector (ISOCONNECTORCL-M-2 included).

#### Surface Mounted Transformers

All 2-circuit surface mounted transformers are encased in a finished metal housing and mount to any standard ceiling electrical box. Typically, you use a surface transformer when an accessible location above the ceiling or in a utility closet is unavailable for installing a remote transformer. Please refer to the technical info on p. 283 for important transformer information and performance specs. 300W (2x150W) and 500W (2x250W) surface mount transformers are available to power your system. 10 AWG flexible coaxial feeder and 2-circuit wire cleanly and attractively sends power to your system. 36" length is standard for our coaxial feeder. It is easily shortened in the field. Consult factory for longer lengths.

Our unique **coaxial feeder** mimics a solid stem when straight. The braided steel outer jacket and the rail adapter beautifully complement the entire system! You can leave it way, too! NOTE: Because a 2-circuit flexible feeder has an additional wire, we recommend ordering a solid stem cover FDRCVR-48-2-(BZ,SC) or FDRCVR-96-2-(BZ,SC) to achieve the best look.

#### direct power feed canopies Allows for closest-to-ceiling possible mounting of 2-Circuit Monorail. Specify with Remote Transformers.

	Choices	Watt & Type	Model #	Input	Output	Compatible Dimmer	Compatible Standoffs
3"	7" (36" standard length)		TRANS-SFE-300-2-(BZ,SC)	2x120 VAC/ 2x1.25A Consists of two independent primaries.	2x150W	Up to (2) Electronic Low voltage Dimmers 600W	Telescoping Rigid or Adjustable Cable
4"	11" — (36" standard length)	Dimming Coil Single-Feed	TRANS-SFM-500-2-(BZ,SC)	2x120 VAC/ 2x2.08A Consists of two independent primaries.	2x250W	Up to (2) Magnetic Low voltage Dimmers 600W	Telescoping Rigid or Adjustable Cable


#### Direct Feed Surface Transformers

Allows for the closest possible mounting of 2-Circuit Monorail to the ceiling. Each mounts to a standard 4" junction box.

Choices	Watt & Type	Model #	Input	Output	Compatible Dimmer	Compatible Standoffs
5.75"	12 volt/ 300W Electronic Single-Feed	TRANSDIR- SFE300(BZ,SC)-2	2x120 VAC/ 2x1.25A Consists of two independent primaries.	2x150W	Up to (2) Electronic Low voltage Dimmers 600W	Direct Feed Telescoping Rigid
7" LED	12 volt/ 500 watt Magnetic Single-Feed	TRANSDIR- SFM500(BZ,SC)-2	2x120 VAC/ 2x2.08A Consists of two independent primaries.	2x250W	Up to (2) Magnetic Low voltage Dimmers 600W	Direct Feed Telescoping Rigid

LED These transformers are compatible with LED Heads and Pendants.



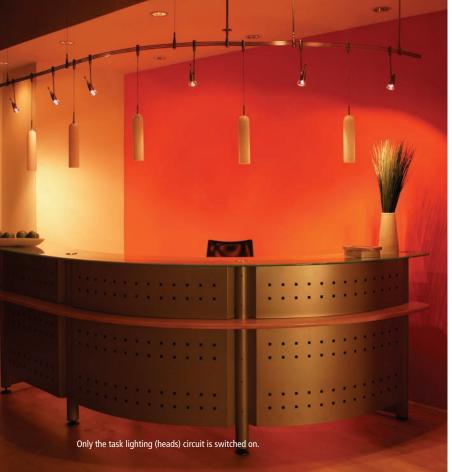







#### Fusion Jack Canopies

Compatible Dimmers

 120V:
 Standard incandescent dimmer

 12V LED:
 Low-voltage electronic dimmer

 277V:
 277V incandescent dimmer

 277V LED:
 277V low-voltage electronic dimmer

#### 4" round dome canopy

Used when the junction box does not have enough room for recessing a 60W electronic transformer (included). Female Fusion Jack port installed. Order elements as FSJ.



	BZ bronze PC polished SC satin nic		
model	finish	type	
CK001B-FJ-	SC		
			120V IN/12V OUT
		-24	120V IN/24V OUT
		-277	277V IN/12V OUT
		-LED	120V IN/12V LED OUT
		-LED277	277V IN/12V LED OUT

# 4" round dome canopy with vault adapter

Mounts to standard 4" electrical box with round plaster ring (provided by electrician). Low-voltage 60W electronic transformer (included) neatly fits into electrical box. Female Fusion Jack port slopes up to 45° for use on vaulted ceilings. Order elements as FSJ.



	BZ bronze PC polished chrome SC satin nickel			
model CK001B-FJV-	finish type			
		-277 -LED	120V IN/12V OUT 120V IN/24V OUT 277V IN/12V OUT 120V IN/12V LED OUT 277V IN/12V LED OUT	

## 4" round flush canopy

Mounts to standard 4 electrical box. 12V, 60W electronic transformer (included) neatly fits into junction box. This is standard with MPT mount elements. Female Fusion Jack port installed. Order elements as FSJ.



		PC polished chrome SC satin nickel			
model finish	type				
CK001I-FJ-	BZ				
			120V IN/12V OUT		
		-24	120V IN/24V OUT		
		-277	277V IN/12V OUT		
		-LED	120V IN/12V LED OUT		
		-LED277	277V IN/12V LED OUT		

I BZ bronze

#### 2.75" round flush canopy

Mounts to special mating electrical box (included) that accepts recessed 12V, 60W electronic transformer (included). Female Fusion Jack port installed. Order elements as FSJ.



choose your options, build your model #.	BZ bronze SC satin nick	kel	
model finish	type		
CK001I-FJ2-	BZ		
			120V IN/12V OUT
		-24	120V IN/24V OUT
		-277	277V IN/12V OUT
		-LED	120V IN/12V LED OUT
		-LED277	277V IN/12V LED OUT

#### Fusion Jack Connectors

#### single-circuit element adapter

This adapter is shipped standard with elements when specifying a single-circuit element (MRL).



PENDADAPMONOFJ	finish <b>BZ</b>	
	BZ bro	onze tin nicke



#### 2-circuit element adapter

This adapter is shipped standard with elements when specifying a 2-circuit element (MR2).

model PENDADAPMONOFJ	finish SC-2
	BZ-2 bronze SC-2 satin nicke



#### wall monorail element adapter

One adapter is required for each head when used on wall monorail.





#### led illuminated wall monorail element adapter

One adapter is required for each head when used on LED illuminated monorail

RAILADAP-WALL	finish SC-LED
	BZ-LED bronze SC-LED satin nickel

# low-voltage fusion jack track adapter

SC satin nickel

Allows Fusion Jack elements to be track-adapted on most popular 120 volt track lighting systems. Electronic transformer concealed in black or white housing. Female Fusion Jack port installed. Order elements as FSJ.



	H009-FJ- fits Juno/Halo* L009-FJ- fits Lightolier*		120V IN/ -LED 120V IN/	121 001
model 3TR	fits H009-FJ- W		type	
		BL black W white		

#### male fusion jack

This part is included with every FSJ (coaxial hung) mini-

model FJ-JACK-	finish SC
	BZ bronze PC polished chrome SC satin nickel



#### recessed can adapter

Used to adapt a Fusion Jack Mini Pendant or Head to an existing recessed can (downlight). Mounts to any recessed can that is 6.25" – 6.50" in diameter and has "C" shaped hooks on the inside can wall. 12V, 60w electronic transformer (included) fits neatly into the can. 120V version dimmable with standard incandescent dimmer; 120V LED version dimmable with low-voltage electronic dimmer. Female Fusion Jack port installed. Order elements as FSJ.

	BZ bronze PC polished of SC satin nick WH white		
model CK001A-FJ-	finish WH	type	-
		-LED	- 120V IN/12V OUT 120V IN/12V LED OUT

<sup>\*</sup> LBL Lighting is not affiliated, nor is it endorsed by any of the companies listed nor does LBL Lighting distribute any of their products.



### 1.5" low-profile canopy

Mounts to special mating cylindrical electrical box 1.5" diameter; 2.5" deep (included). Female Fusion Jack port installed. Low-voltage remote transformer required (sold separately). See page 240 for remote transformers. Order elements as FSJ.

	BZ bronze PC polished chrome SC satin nickel		
model CK001P-FJ-	finish SC		



#### fusion jack swag hook

Used to change a Mini Pendant's point of suspension to any point on the ceiling.



model	finish
FJ-SWAGHOOK-	SC
	BZ bronze
	PC polished chron
	SC satin nickel

#### Fusion Jack Multi-Port Canopies

Multi-light canopies are ideal for creating a dramatic centerpiece over a dining table, kitchen island or reception area. The aesthetic impact of multiple Italian glass pendants cascading from one of our multi-light canopies is undeniable. Available in three styles: round, square and rectangle, and in three finishes: bronze, satin nickel and glass. Our multi-light canopies can accommodate up to eleven lights, in low-voltage (FSJ) or up to five lights, in line-voltage (120V, page 43).

#### Compatible Dimmers:

120V: Standard incandescent dimmer 12V LED: Low-voltage electronic dimmer 277V: 277V incandescent dimmer

277V LED: 277V low-voltage electronic dimmer



To order as shown:

- (1) Fusion Jack 4 Square Canopy in Bronze
- (4) Fusion Jack Sophia Pendants in Amber



To order as shown:

- (1) Fusion Jack 3 Rectangle Canopy in Satin Nickel
- (3) Fusion Jack Jelly Pendants in Blue



#### 11 round See p 40 for more information.

		BZ bronze SC satin nickel		
model	canopy	finish	type	
CK011BD-FJ-	MA	SC		
	MA maple WA walnut		120V IN/12V OUT - <b>LED</b> 120V IN/12V LED OUT	



#### 7 rectangle See p 40 for more information.

	BZ bronze SC satin nickel			
model	canopy	finish	type	
CK011BD-FJ-	MA	SC		
	MA mapl		-LED	120V IN/12V OUT 120V IN/12V LED OU

# Fusion Jack Multi-Port Canopies continued



#### 7 round

	BZ bron GL glas SC satir	S	
model CK007B-FJ-	finish SC	type	
		-277	120V IN/12V OUT 120V IN/24V OUT 277V IN/12V OUT
		-LED	120V IN/12V LED OUT



#### 3 round

	GL glass SC satin		
model CK003B-FJ-	finish <b>GL</b>	type	
		-277 -LED	120V IN/12V OUT 120V IN/24V OUT 277V IN/12V OUT 120V IN/12V LED OUT



# 5 round

	BZ bronze GL glass SC satin nickel					
model CK005B-FJ-	finish <b>B7</b>	type				
CKOODE-L1-	DZ					
			120V IN/12V OUT			
		-24	120V IN/24V OUT			
		-277	277V IN/12V OUT			
		-LED	120V IN/12V LED OUT			
		-LED277	277V IN/12V LED OUT			



## 4 square

	BZ bronze GL glass SC satin nickel					
model CK004S-FJ-	finish type					
		-277 -LED	120V IN/12V OUT 120V IN/24V OUT 277V IN/12V OUT 120V IN/12V LED OUT 277V IN/12V LED OUT			



# 3 rectangle

	GL glass	BZ bronze GL glass SC satin nickel						
model	finish	type						
CK003R-FJ-	SC							
			120V IN/12V OUT					
		-24	120V IN/24V OUT					
		-277	277V IN/12V OUT					
		-LED	120V IN/12V LED OUT					
		-LED277	277V IN/12V LED OUT					



6 watt LED pendant assembly (pp. 78-145)

**Power Consumption:** 6 watts **Color Temperature:** 3000K

Lumens:282 net lumensLumens/Watt:48 lms/wattColor Rendering Index:85 CRI

Rated Average Life: >30,000 hours to 70%

Center Beam Candle Power: 500

**Dimming:** 10% with low-voltage

electronic and magnetic dimmer

Fusion Jack LED Onyx Cylinder Pendants | Fusion Jack 4" Round Flush Canopies

– 50 pendant options

Aluminum heat sink stays with pendant to minimize waste



Field-replaceable LED lamp module

**NOTE:** We are constantly looking to improve our LED performance. Therefore, be sure to visit www.lbllighting.com for the most updated LED product information.

#### 6 watt LED swing track head assembly (p. 148)

Power Consumption:6 wattsColor Temperature:3000KLumens:270 net lumens

Lumens/Watt:45 lms/wattColor Rendering Index:85 CRI


Rated Average Life: >30,000 hours to 70%

Center Beam Candle Power: 25° - 1200

40° - 500

**Dimming:** 10% with low-voltage

electronic and magnetic dimmer

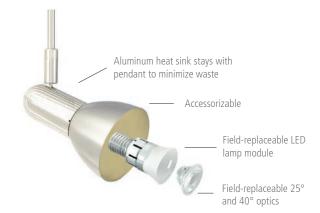

#### Below is the ordering matrix for the Swing LED Head.

	BZ bronze SC satin nic	kel	<b>03</b> 3" <b>06</b> 6" <b>12</b> 12"		FSJ fusion jack MPT monopoint MR2 2-circuit rai MRL monorail
model	finish	beam spread	length	lamp	mount
HD503	BZ	25	03	LED	MRL
		<b>25</b> 25° <b>40</b> 40°		LED Modu	ule 6w

Result: HD503SC06LEDMRL

**Power Consumption:** 

**Color Temperature:** 

Bare Lumens:

Lumens/Watt:

# 10 watt LED wall sconce fixtures some highlights from our offering (pp. 160-191)



cato (p.165) 10 watts 3000K 600 lumens 60 lms/watt

electronic dimmer

Color Rendering Index:80 CRIRated Average Life:>50,000 hours to 70%Dimming:10% with low-voltage

derby

(p.169)

10 watts
3000K
600 lumens
60 lms/watt
80 CRI
>50,000 hours to 70%
10% with low-voltage
electronic dimmer



hollywood beach (p.163) 10 watts 3000K 600 lumens 60 lms/watt 80 CRI >50,000 hours to 70% 10% with low-voltage electronic dimmer



zip

(p. 164)
10 watts
3000K
600 lumens
60 lms/watt
80 CRI
>50,000 hours to

>50,000 hours to 70% 10% with low-voltage electronic dimmer

**NOTE:** We are constantly looking to improve our LED performance. Therefore, be sure to visit www.lbllighting.com for the most updated LED product information.

#### Ordering an LBL System with LED Elements

Ordering an LBL low-voltage system with LED heads and pendants is easy. All of the hardware components are identical to our other low-voltage systems with the exception of the transformer. Simply specify an LED Illuminated Monorail\*, Fusion Jack, Monorail, 2-Circuit Monorail or Wall Monorail system, and choose one of the LED-compatible transformers found below.

#### compatible LED transformers

All of our magnetic transformers will work with our LED heads and pendants. Only the electronic transformers in this chart will work with our LED elements (heads and pendants).

ITEM #	DESCRIPTION		ATIBLE EMENTS MAX. <sup>2</sup>	COMPATIBLE DIMMER	PAGE NO
REMOTE TRANSFORMERS					
TRANS-RMTE-75M	75w mag	1	12	l.v. mag, 600 watts	p. 294
TRANS-RMTE-75M/277	75w mag	1	12	l.v. mag, 600 watts	p. 294
TRANS-RMTE-150M	150w mag	1	25	l.v. mag, 600 watts	p. 294
TRANS-RMTE-150M/277	150w mag	1	25	l.v. mag, 600 watts	p. 294
TRANS-RMTE-300M	300w mag	1	50	l.v. mag, 600 watts	p. 294
TRANS-RMTE-300M/277	300w mag	1	50	l.v. mag, 600 watts	p. 294
MONORAIL SURFACE TRANS	SFORMERS				
TRANS-SFE60-(BZ,SC)	60w elec flush <sup>1</sup>	2	10	l.v. elec, 600 watts	p. 296
TRANS-SFE60-(BZ,SC)/277	60w elec flush <sup>1</sup>	2	10	I.v. elec, 600 watts	p. 296
TRANS-SFE61-(BZ,SC)	60w elec surface	2	10	I.v. elec, 600 watts	p. 296
TRANS-SFE61-(BZ,SC)/277	60w elec surface	2	10	I.v. elec, 600 watts	p. 296
TRANS-SFE100-(BZ,SC)	100w elec surface	5	16	I.v. elec, 600 watts	p. 296
TRANS-SFE100-(BZ,SC)/277	100w elec surface	5	16	I.v. elec, 600 watts	p. 296
TRANS-SFM75-(BZ,SC)	75w mag surface	1	12	I.v. mag, 600 watts	p. 296
TRANS-SFM75-(BZ,SC)/277	75w mag surface	1	12	l.v. mag, 600 watts	p. 296
TRANS-SFM150-(BZ,SC)	150w mag surface	1	25	I.v. mag, 600 watts	p. 296
TRANS-SFM300-(BZ,SC)	300w mag surface	1	50	I.v. mag, 600 watts	p. 296
TRANS-SFM300-(BZ,SC)/277	300w mag surface	1	50	I.v. mag, 600 watts	p. 296
MONORAIL DIRECT FEED SI	URFACE TRANSFORMERS				
TRANSDIR-SFE60(BZ,SC)	60w elec flush direct fd <sup>1</sup>	2	10	l.v. elec, 600 watts	p. 297
TRANSDIR-SFE60(BZ,SC)/277	60w elec flush direct fd <sup>1</sup>	2	10	I.v. elec, 600 watts	p. 297
TRANSDIR-SFE61(BZ,SC)	60w elec surface direct fd	2	10	I.v. elec, 600 watts	p. 297
TRANSDIR-SFE61(BZ,SC)/277	60w elec surface direct fd	2	10	I.v. elec, 600 watts	p. 297
TRANSDIR-SFE100(BZ,SC)	100w elec surface direct fd	5	16	I.v. elec, 600 watts	p. 297
TRANSDIR-SFE100(BZ,SC)/277	100w elec surface direct fd	5	16	I.v. elec, 600 watts	p. 297
TRANSDIR-SFM75(BZ,SC)	75w mag surface direct fd	1	12	I.v. mag, 600 watts	p. 297
TRANSDIR-SFM75(BZ,SC)/277	75w mag surface direct fd	1	12	l.v. mag, 600 watts	p. 297
TRANSDIR-SFM150(BZ,SC)	150w mag surface direct fd	1	25	I.v. mag, 600 watts	p. 297
TRANSDIR-SFM300(BZ,SC)	300w mag surface direct fd	1	50	I.v. mag, 600 watts	p. 297
TRANSDIR-SFM300(BZ,SC)/277	300w mag surface direct fd	1	50	I.v. mag, 600 watts	p. 297
2-CIRCUIT MONORAIL REM	OTE TRANSFORMERS				
TRANS-RMTE-150M-2	150w mag	2	25	l.v. mag, 600 watts	p. 297
TRANS-RMTE-300M-2	300w mag	2	50	I.v. mag, 600 watts	p. 297
TRANS-RMTE-600M-2	600w mag	2	100	I.v. mag, 600 watts	p. 297
TRANS-RMTE-600M-2/277	600w mag	2	100	I.v. mag, 600 watts	p. 297
2-CIRCUIT MONORAIL SURI	FACE TRANSFORMERS				
TRANS-SFM-500M-2(BZ, SC)	500w mag	2	82	I.v. mag, 600 watts	p. 297
TRANSDIR-SFM500M(BZ, SC)-2	500w mag Direct Feed	2	82	I.v. mag, 600 watts	p. 297
	AIL SURFACE TRANSFORMERS			-	•
TRANS-SFE60-(BZ,SC)-LED	60w elec flush <sup>1</sup>	2	10	I.v. elec, 600 watts	p. 316
TRANS-SFE60-(BZ,SC)-LED/277	60w elec flush <sup>1</sup>	2	10	l.v. elec, 600 watts	p. 316
	60w elec surface	2	10	I.v. elec, 600 watts	

 $<sup>^{1}</sup>$ Transformer fits inside standard 4" square junction box with round plaster ring.

<sup>\*</sup>When specifying LED Illuminated Monorail, remember to order the MR2 version of the pendant or head.

If you have any questions about designing a system with LED elements, please contact our technical support group at (847) 626-6300.

<sup>&</sup>lt;sup>2</sup> Maximum recommended length is 100′ for Monorail with a single LED compatible transformer.

# compatible LED transformers continued

ITEM #	DESCRIPTION	COMPA 6W ELI MIN.	ATIBLE EMENTS MAX. <sup>2</sup>	COMPATIBLE DIMMER	PAGE NO
LED ILLUMINATED MONORAIL	SURFACE TRANSFORMERS (CON	ITINUED)			
TRANS-SFE61-(BZ,SC)-LED/277	60w elec surface	2	10	l.v. elec, 600 watts	p. 316
TRANS-SFE100-(BZ,SC)-LED	100w elec surface	5	16	l.v. elec, 600 watts	p. 316
TRANS-SFE100-(BZ,SC)-LED/277	100w elec surface	5	16	l.v. elec, 600 watts	p. 316
TRANS-SFM75-(BZ,SC)-LED	75w mag surface	1	12	I.v. mag, 600 watts	p. 316
TRANS-SFM75-(BZ,SC)-LED/277	75w mag surface	1	12	l.v. mag, 600 watts	p. 316
TRANS-SFM150-(BZ,SC)-LED	150w mag surface	1	25	I.v. mag, 600 watts	p. 316
TRANS-SFM300-(BZ,SC)-LED	300w mag surface	1	50	l.v. mag, 600 watts	p. 316
TRANS-SFM300-(BZ,SC)-LED/277	300w mag surface	1	50	I.v. mag, 600 watts	p. 316
LED ILLUMINATED MONORAIL	DIRECT FEED SURFACE TRANSF	ORMERS			
TRANSDIRSFE60(BZ,SC)-LED	60w elec flush direct fd <sup>1</sup>	2	10	I.v. elec, 600 watts	p. 317
TRANSDIRSFE60(BZ,SC)-LED/277	60w elec flush direct fd <sup>1</sup>	2	10	I.v. elec, 600 watts	p. 317
TRANSDIRSFE61(BZ,SC)-LED	60w elec surface direct fd	2	10	I.v. elec, 600 watts	p. 317
TRANSDIRSFE61(BZ,SC)-LED/277	60w elec surface direct fd	2	10	l.v. elec, 600 watts	p. 317
TRANSDIRSFE100(BZ,SC)-LED	100w elec surface direct fd	5	16	l.v. elec, 600 watts	p. 317
TRANS-SFM75-(BZ,SC)/277	100w elec surface direct fd	5	16	l.v. elec, 600 watts	p. 317
TRANSDIRSFM75(BZ,SC)-LED	75w mag surface direct fd	1	12	I.v. mag, 600 watts	p. 317
TRANSDIRSFM75(BZ,SC)-LED/277	75w mag surface direct fd	1	12	I.v. mag, 600 watts	p. 317
TRANSDIRSFM150(BZ,SC)-LED	150w mag surface direct fd	1	25	I.v. mag, 600 watts	p. 317
TRANSDIRSFM300(BZ,SC)-LED	300w mag surface direct fd	1	50	I.v. mag, 600 watts	p. 317
TRANSDIRSFM300(BZ,SC)-LED/277	300w mag surface direct fd	1	50	l.v. mag, 600 watts	p. 317
FUSION JACK CANOPIES					
CK001I-FJ-(BZ,PC,SC)-LED	4 Round Flush Canopy <sup>1</sup>	1	1	l.v. elec, 600 watts	p. 282
CK001I-FJ-(BZ,PC,SC)-LED/277	4 Round Flush Canopy <sup>1</sup>	1	1	l.v. elec, 600 watts	p. 282
CK001I-FJ2-(BZ,SC)-LED	2.75 Round Canopy <sup>3</sup>	1	1	l.v. elec, 600 watts	p. 282
CK001I-FJ2-(BZ,SC)-LED/277	2.75 Round Canopy <sup>3</sup>	1	1	l.v. elec, 600 watts	p. 282
CK001B-FJ-(BZ,PC,SC)-LED	Surface Canopy	1	1	l.v. elec, 600 watts	p. 282
CK001B-FJ-(BZ,PC,SC)-LED/277	Surface Canopy	1	1	l.v. elec, 600 watts	p. 282
CK004S-FJ-(BZ,GL,SC)-LED	4-Port Square Canopy	4	4	l.v. elec, 600 watts	p. 285
CK004S-FJ-(BZ,GL,SC)-LED/277	4-Port Square Canopy	4	4	l.v. elec, 600 watts	p. 285
CK003R-FJ-(BZ,GL,SC)-LED	3-Port Linear Canopy	3	3	l.v. elec, 600 watts	p. 285
CK003R-FJ-(BZ,GL,SC)-LED/277	3-Port Linear Canopy	3	3	l.v. elec, 600 watts	p. 285
CK003B-FJ-(BZ,GL,SC)-LED	3-Port Linear Canopy	3	3	l.v. elec, 600 watts	p. 285
CK003B-FJ-(BZ, GL,SC)	3-Port Linear Canopy	3	3	l.v. elec, 600 watts	p. 285
CK005B-FJ-(BZ,GL,SC)-LED	5-Port Round Canopy	5	5	l.v. elec, 600 watts	p. 285
CK005B-FJ-(BZ,GL,SC)-LED/277	5-Port Round Canopy	5	5	l.v. elec, 600 watts	p. 285
CK007B-FJ-(BZ,GL,SC)-LED	7-Port Round Canopy	7	7	l.v. elec, 600 watts	p. 285
CK007B-FJ-(BZ,GL,SC)-LED/277	7-Port Round Canopy	7	7	l.v. elec, 600 watts	p. 285
CK007RD-FJ-(MA, WA) (SC,BZ)-LED	7-Port Round Canopy	7	7	I.v. elec, 600 watts	p. 285
CK0011BD-FJ-(MA, WA) (SC,BZ)-LED	11-Port Round Canopy	11	11	I.v. elec, 600 watts	p. 285
CK001A-FJ-(BZ,PC,SC,WH)-LED	Recessed Can Adapter	1	1	I.v. elec, 600 watts	p. 284
3TRH009-FJ-(BL, W)-LED	Low-Voltage FSJ Track Adapter	1	1	I.v. elec, 600 watts	p. 284
3TRJ009-FJ-(BL, W)-LED	Low-Voltage FSJ Track Adapter	1	1	I.v. elec, 600 watts	p. 284

<sup>&</sup>lt;sup>1</sup>Transformer fits inside standard 4" square junction box with round plaster ring.

<sup>2</sup> Maximum recommended length is 100' for Monorail with a single LED compatible transformer.

<sup>3</sup> Transformer fits inside special 2" square junction box (included.)


12 Volt	incandescent la	mps									
	enox Bi-pin	p3									
12 VOIT X	H410XCL	G4 12v 10w Xenon CL	12	10	G4	na	2800	100	na	125	10,000
	H420XCL	G4 12v 20w Xenon CL	12	20	G4	na	2800	100	na	250	10,000
	H435XCL	GY6.35 12v 35w Xenon CL	12	35	GY6.35	na	2900	100	na	525	10,000
	H435XFR	GY6.35 12v 35w Xenon FR	12	35	GY6.35	na	2900	100	na	525	10,000
	H450	GY6.35 12v 50w Xenon CL	12	50	GY6.35	na	2900	100	na	750	10,000
	H450XFR	GY6.35 12v 50w Xenon FR	12	50	GY6.35	na	2900	100	na	750	10,000
12 Volt Ha	alogen Bi-pin H410XCL	GY6.35 12v 35w Halogen CL	12	35	GY6.35	na	3000	100	na	600	2,000
		G 10.55 12V 55W Halogell CL	12	33	010.55	na	3000	100	IId	600	2,000
12 Volt M	<b>R11</b> H849M-C	MR11 12v 10w 18° CG	12	10	GU4	18°	3000	100	420	22	2,000
	H850M-C	MR11 12v 20w FTD 30° CG	12	20	GU4	30°	3000	100	700	na na	3,000
	H851M-C	MR11 12v 35w FTH 30° CG	12	35	GU4	30°	3000	100	1,500	na	3,000
12 Volt M	R16										
	H860N-C	MR16 12v 20w ESX 12° CG	12	20	GU5.3	12°	3000	100	4,100	na	3,000
W	H860W-C	MR16 12v 20w BAB 36° CG	12	20	GU5.3	36°	3000	100	700	na	3,000
	H863M-C	MR16 12v 35w FRA 24° CG	12	35	GU5.3	24°	3000	100	3,500	na	3,000
	H863W-C	MR16 12v 35w FMW 40° CG	12	35	GU5.3	36°	3000	100	1,250	na	3,000
	H870N-C	MR16 12v 50w EXT 12° CG	12	50	GU5.3	12°	3000	100	10,000	na	3,000
	H870M-C	MR16 12v 50w EXZ 24° CG	12	50	GU5.3	24°	3000	100	4,400	na	3,000
	H870W-C	MR16 12v 50w EXN 36° CG	12	50	GU5.3	36°	3000	100	1,700	na	3,000
	H880N-C	MR16 12v 75w EYF 14° CG	12	75	GU5.3	14°	3000	100	15,000	na	3,000
	H880W-C	MR16 12v 75w EYC 38° CG	12	75	GU5.3	38°	3000	100	2,950	na	3,000
12 Volt M	R16 Constant CRI										
T	H860N-C/CC	MR16 12v 20w ESX 12°CG/CC	12	20	GU5.3	12°	3000	100	5,000	na	5,000
"	H860W-C/CC	MR16 12v 20w BAB 36°CG/CC	12	20	GU5.3	36°	3000	100	900	na	5,000
	H863M-C/CC	MR16 12v 35w FRA 24°CG/CC	12	35	GU5.3	24°	3000	100	4,400	na	5,000
	H863W-C/CC	MR16 12v 35w FMW 36°CG/CC	12	35	GU5.3	36°	3000	100	1,600	na	5,000
	H870N-C/CC	MR16 12v 50w EXT 12°CG/CC	12	50	GU5.3	12°	3000	100	13,000	na	5,000
	H870M-C/CC	MR16 12v 50w EXZ 24°CG/CC	12	50	GU5.3	24°	3000	100	5,600	na	5,000
	H870W-C/CC	MR16 12v 50w EXN 38°CG/CC	12	50	GU5.3	38°	3000	100	2,200	na	5,000
12 Volt M	R16 Ultra 10,000 Hou	9	12	Ε0.	CUE 2	170	2000	100	10.000		10.000
	H870N-C/CC/ULTRA H870M-C/CC/ULTRA	MR16 12v 50w EXT12° CG/LL MR16 12v 50w EXZ24° CG/LL	12 12	50 50	GU5.3 GU5.3	12° 24°	2900 2900	100 100	10,000 4,400	na	10,000
		MR16 12v 50w EXN38° CG/LL	12	50	GU5.3 GU5.3	24 36°	2900	100	1,700	na na	10,000 10,000
12 Volt M	R16 Black and Silver	Rack									,
TZ VOIC IVI	H863W-C/B/CC	MR16 12v 35w FMW36°CG/BLK	12	35	GU5.3	36°	2900	100	1,250	na	5,000
₩	H870M-C/B/CC	MR16 12v 50w EXZ24°CG/BLK	12	50	GU5.3	24°	2900	100	4,400	na	5,000
	H870W-C/B/CC	MR16 12v 50w EXN38°CG/BLK	12	50	GU5.3	36°	2900	100	1,700	na	5,000
	H863W-C/S/CC	MR16 12v 35w FMW36°CG/SIL	12	35	GU5.3	36°	2900	100	1,250	na	5,000
	H870M-C/S/CC	MR16 12v 50w EXZ24°CG/SIL	12	50	GU5.3	24°	2900	100	4,400	na	5,000
	H870W-C/S/CC	MR16 12v 50w EXN38°CG/SIL	12	50	GU5.3	36°	2900	100	1,700	na	5,000
12 Volt M	R16 Frosted										
	H860-FR-C/CC	MR16 12v 20w CG/FROST	12	20	GU5.3	na	3000	100	na	250	3,000
π	H863-FR-C/CC	MR16 12v 35w CG/FROST	12	35	GU5.3	na	3000	100	na	820	3,000
	H870-FR-C/CC	MR16 12v 50w CG/FROST	12	50	GU5.3	na	3000	100	na	850	3,000
12 Volt M											
	H895M-LED/3000K	LED MR16 12v 6w 25° 3000K	12	6	GU5.3	25°	na	na	na	na	30,000
"	H895M-LED/5000K	LED MR16 12v 6w 25° 5000K	12	6	GU5.3	25°	na	na	na	na	30,000
	H895M-LED/AMBER	LED MR16 12v 5w 25° Amber	12	5	GU5.3	25°	na	na	na	na	30,000
	H895M-LED/BLUE	LED MR16 12v 5w 25° Blue	12	5	GU5.3	25°	na	na	na	na	30,000
	H895M-LED/GREEN	LED MR16 12v 5w 25° Green	12	5	GU5.3	25°	na	na	na	na	30,000
	H895M-LED/RED	LED MR16 12v 5w 25° Red	12	5	GU5.3	25°	na	na	na	na	30,000
12 Volt AF	<b>R111</b> AR11150FL25	AR111 12v 50w FLOOD 24°	120	50	Push Screw	24°	3000	100	4,000	na	3,000
2434 15						•			,		.,
	Incandescent La	amps									
	enon Bi-pin H410XCL/24V	G4 24v 10w Xenon CL	24	10	G4	na	2800	100	na	125	10,000
	H420/24V	G4 24v 70w Xenon CL	24	20	G4 G4	na na	2800	100	na na	250	10,000
	H435X/24V	GY 6.35 24v 35w Xenon CL	24	35	G4 GY6.35	na	2900	100	na	550 550	5,000
	H450X/24V	GY6.35 24v 50w Xenon CL	24	50	GY6.35	na	2900	100	na	750	5,000
24 Volt H	alogen Bi-pin				-		-			-	
	H335CL/24V	GY6.35 24v 35w Halogen CL	24	35	GY6.35	na	3000	100	na	600	2,000
**		-									


# Lamp Selection Guide

	Product No.	Description	Volts	Watts	Base Type	Beam Spread	Color Temp (K)	CRI	Center Beam Candlepower	Initial Lumens	Avg. Rated Life
24 Vol	t Incandescei	· · · · · · · · · · · · · · · · · · ·									
24 Volt I		1.0									
VOIC 1	H850M-C/24V	MR11 24v 20w FTD 30° CG	24	20	GU4	30°	3000	100	700	na	3,000
₩	H851M-C/24V	MR11 24v 35w FTH 30° CG	24	35	GU4	30°	3000	100	850	na	3,000
4 Volt I	VIR16										
<b>T</b>	H863W/24V	MR16 24v 35w FMW 36° CG	24	35	GU5.3	36°	3000	100	1,250	na	3,000
W	H870W/24V	MR16 24v 50w EXN 38° CG	24	50	GU5.3	38°	3000	100	1,700	na	3,000
120 1/4	olt Incandesc	ont Lamns									
		ent ramps									
20 Volt	Halogen BT15	F3C 130 CO PT1F Halaman W/H	120	C0	Fac		2000	100		700	2.000
	H200	E26 120v 60w BT15 Halogen WH	120	60	E26	na	2800	100	na	760	3,000
	Incandescent A1	E26 120v 60w A19 Incandescent WH	120	60	Fac		2700	100		005	1 000
-	H101	E26 120v 75w A19 Incandescent WH	120 120	75	E26 E26	na na	2700 2700	100	na na	805 1190	1,000 750
	H103	E26 120v 100w A19 Incandescent WH	120	100	E26	na	2700	100	na	1710	750
20 Val+			120	100		110	2700	100	TIG .	1710	730
20 VOIL	H100	ussic Edison Style A-Lamp E26 120v 60w Classic Edison A19 CL	120	60	E26	na	2700	100	na	500	2,500
			120		120	iiu	2700	100	TIG .	300	2,300
20 Voit	H104	assic Edison Style T9 E26 120v 30w Classic Edison T9 CL	120	30	E26	na	2700	100	na	500	3,000
			120	30	EZU	na	2700	100	na	300	3,000
20 Volt	Incandescent G4	E26 120v 150w G40 Incandescent WH	120	150	E26	na	2700	100	na	1770	2 500
•	H150 H151	E26 120v 150w G40 Incandescent WH E26 120v 60w G40 Incandescent Half-Chrome	120 120	150 60	E26 E26	na na	2700 2700	100 100	na na	1770 565	2,500 1,500
12037 1		LZO 1ZOV DOVV GAO IIICAIIGESCEIIL FIAII-CIIIOIIIE	120	00	LZU	110	2100	100	ıla	505	1,500
20 Volt	Halogen G9	CO 130: 40:: Heleven FD	120	40	G9		2900	100		480	2.000
		G9 120v 40w Halogen FR	120	40	9	na	2900	100	na	400	2,000
20 Volt		Krypton and Halogen	120	40	Г11		2000	100		FC0	2.000
	H910 H915	E11 120v 40w Krypton CL E11 120v 60w Krypton CL	120 120	40 60	E11 E11	na na	2800 2800	100 100	na	560 960	2,000 2,000
•	H680	E11 130v 75w Halogen CL	130	75	E11	na	2900	100	na na	1050	2,000
	H685	E11 130v 75w Halogen CL	130	100	E11	na	2900	100	na	1500	2,000
	H690	E11 130v 150w Halogen CL	130	150	E11	na	2900	100	na	2500	2,000
	H695	E11 130v 250w Halogen CL	130	250	E11	na	3000	100	na	5000	2,000
120 Volt	Double Ended Ha										,
-	H704	R7s 130v 100w 78mm Hal CL	130	100	R7s	na	2900	100	na	1650	2,000
	H706	R7s 130v100w 118mm Hal CL	130	100	R7s	na	2900	100	na	1650	2,000
20 Volt	Linestra Lamps										
	L060	S14S 120v 60w Linestra WH	120	60	S14S	na	2850	100	na	460	1,000
	L150	S14S 120v 150w Linestra WH	120	150	S14S	na	2850	100	na	930	1,000
luoro	scent										
Compac		n Quad Tube (for use with electronic ballasts	)	12	C24= 1		2700	0.7		000	10.000
u II	PL13Q-4P	CFL G24q-1 Quad 13w 2700K		13	G24q-1	na	2700	82	na	900	10,000
**	PL18Q-4P PL26Q-4P	CFL G24q-2 Quad 18w 2700K CFL G24q-3 Quad 26w 2700K		18 26	G24q-2 G24q-3	na na	2700 2700	82 82	na na	1250 1825	10,000 10,000
	`			20	0249 3	IIu	2700	02	Ha	1023	10,000
		In Triple Tube (for use with electronic ballasts CFL GX24q-1 Trp 13w 2700K	5)	12	Cv2/a 1	22	2700	82	200	900	10,000
₩	PL13TBX PL18TBX	CFL GX24q-1 IIP 13W 2700K CFL GX24q-2 Trp 18W 2700K		13 18	Gx24q-1 Gx24q-2	na na	2700	82	na na	1200	10,000
	PL26TBX	CFL GX24q 2 Hp 16W 2700K CFL GX24q-3 Trp 26W 2700K		24	Gx24q 2 Gx24q-3	na	2700	82	na	1800	10,000
	PL32TBX	CFL GX24q-3 Trp 32w 2700K		32	Gx24q-3	na	2700	82	na	2400	10,000
	PL42TBX	CFL GX24q-4 Trp 42w 3000K		42	Gx24q-4	na	3000	82	na	3200	10,000
omnac		n Twin Tube (for use with electronic ballasts)			- 1						
.ompac n	PL13-4P	CFL 2GX7 Twin 13w 2700K		13	2Gx7	na	3000	82	na	800	10,000
	PL24BX	CFL 2G11 Twin 24w 3000K		24	2G11	na	3000	82	na	1800	10,000
•	PL39BX	CFL 2G11 Twin 36w 3000K		36	2G11	na	3000	82	na	2900	12,000
ompac	t Fluorescent 120	Volt GU24 Self-Ballasted									
	GU24/18	CFL Self-Ballasted GU24 Spiral 18w 2700K	120	18	GU24	na	2700	82	na	1200	10,000
-	GU24/27	CFL Self-Ballasted GU24 Spiral 27w 2700K	120	27	GU24	na	2700	82	na	1800	10,000
	GU24/32	CFL Self-Ballasted GU24 Spiral 32w 2700K	120	32	GU24	na	2700	82	na	2100	10,000
ompac	t Fluorescent 120	Volt E26 Plumen Self-Ballasted									
	FB100	CFL Self-Ballasted E26 Plumen 11w 2700K	120	11	E26	na	2700	82	na	630	8,000
inear F	luorescent	Flooring TE 4.4 2000K	4.4	141 1 51	D'		2000	0.2		1250	20.000
	FL14T5	Fluorescent T5 14w 3000K Fluorescent T5HO 24w 3000K	14 24	Mini Bi- Mini Bi-		na	3000 3000	82 82	na	1350 2000	20,000
	FL24T5HO		24	IVIIIII DI-	1 111	na	3000	02	na	2000	20,000
ligh I	ntensity Disc	harge									
/letal H	alide										
	50MH	E26 50w Metal Halide CL		50	E26 HID	na	na	na	na	3400	10,000
	JUMIN	EZO JOW MICKAI HANGE CE									

#### Selected Lamp Photometrics

#### 12 Volt MR11





#### 12 Volt MR16



20w 12° H860N-C FTD







35w 24° H863M-C **FMV** 



35w 36° H863W-C FMW



50w 12° H870N-C EXT



50w 24° H870M-C EXZ



50w 36° H870W-C EXN



75w 14° H880N-C EYF



75w 38° H880W-C EYC

#### **Transformers**

Low-voltage lighting systems use transformers to step down and isolate standard line-voltages (e.g. 120VAC and 277VAC, etc) to safe-to-touch low-voltages such as 12VAC.

There are two categories of transformer styles to choose from: **remote** or **surface mount** transformers.

**Remote Transformers** are installed at a distance from the lighting system. This allows the transformer to be placed out of view from the aesthetically pleasing lighting system. Since remote transformers are placed at some considerable distance from the lighting system, the installer must be aware of voltage drop. The best approach for achieving optimum lamp voltage at the transformer output is to observe the wiring instructions accompanied with our remote multi-tap transformers in conjunction with the appropriate wire gauge specified in our voltage drop table.

In general, to obtain a minimum voltage drop of 3% from the output of the remote transformer to the power feed canopy, please use the appropriate wire gauge specified in our voltage drop table (below).

Low-Va	Low-Voltage Wire Size Table												
	Use to determine the correct THHN wire size for a recommended 3 percent drop in voltage at the specified wattage. The length shown is the length of wire from the transformer to the power feed.												
12 VOLT	5 ft.	6-15 ft.	6-20 ft.	21-40 ft.	41-60 ft.	61-90 ft.							
150 watt	#12 GA	#8 GA	#6 GA	#4 GA	#2 GA	#1 GA							
300 watt	#10 GA	#6 GA	#4 GA	#1 GA	1/0	3/0							
24 VOLT	5 ft.	6-15 ft.	6-20 ft.	21-40 ft.	41-60 ft.	61-90 ft.							
300 watt	#14 GA	#12 GA	#10 GA	#6 GA	#6 GA	#4GA							
600 watt	#12 GA	#8 GA	#6 GA	#4 GA	#2 GA	#1 GA							

**Surface Mount Transformers** are installed close to the lighting system usually to a junction box in a ceiling. Since surface mount transformers are visible, we have designed our surface mount transformers to aesthetically complement our lighting systems. Surface mount transformers will not experience voltage drop issues to the degree and severity of remote transformers and hence do not have or need boost taps.

Transformers can further be broken down into two types: **magnetic** or **electronic transformers.** 

**Magnetic Transformers** operate at standard low frequencies (50/60 Hz). They offer very reliable operation and are very durable. Since magnetic transformers operate at low frequencies, they experience much less voltage drop over a long distance compared to high frequency electronic transformers.

**Electronic Transformers** are very compact and much smaller than their magnetic counterparts. They provide built in protection against electrical shorts applied at the outputs and to the lighting system. In order for electronic transformers to operate properly, the output must be loaded to a minimum of 50% of the rated wattage of the transformer. Any output load below 50% may result in lamps flickering and lamps burning out prematurely. Since electronic transformers operate at much higher frequencies, most standard volt and amp meters intended for 60hz type measurements cannot be used to accurately measure the outputs of these transformers. Consult a qualified electrician for assistance.

Electronic transformers may cause interference with appliances such as TVs and radios. If interference is a problem, a line filter may be installed either at the transformer or at the appliance input. Another option is to use a magnetic transformer, which operates at a lower frequency and will not cause any interference.

# Model Name Index

DRODUCT NAME	CECTION	DACE
PRODUCT NAME	SECTION	PAGE
"T" Conductive Connector		
"T" Conductive Connector		
"X" Conductive Connector		
"X" Conductive Connector		
1.5" Low-Profile Canopy	Fusion Jack	273
120V Multi-Light Canopies	Suspension	43
2.75" Round Flush Canopy	Fusion Jack	272
24" Diameter Circle, 2-Ciruit Monorail	2-Circuit Monorail	262
24" Diameter Circle, Monorail	Monorail	236
2-Circuit Element Adapter	Fusion Jack	273
32" Spiral, Monorail	Monorail	236
4" Round Dome Canopy	Fusion Jack	272
4" Round Dome Canopy With Vault Adapter	Fusion Jack	272
4" Round Flush Canopy	Fusion Jack	272
48" Spiral, Monorail	Monorail	236
48" Diameter Circle, 2-Ciruit Monorail	2-Circuit Monorail	262
48" Diameter Circle, Monorail	Monorail	236
Abbey	Pendants Low-Voltage	89
Abbey Grande	Pendants Line-Voltage	71
Addison	Pendants Line-Voltage	72
Adjustable Angle Conductive Connector	2-Circuit Monorail	263
Adjustable Angle Conductive Connector		
Adjustable Angle Vertical Connector		
Adjustable Angle Vertical Connector		
Adjustable Cable Standoffs		
Adjustable Cable Standoffs		
Adjustable Cable Standoffs		
Aiko		
Alaya	, and the second	
Aliseo	, and the second	
Allie		
Ambra	3	
Ambra		
, per surre		154
Aquarii	_	
Ariana		
Athena		
Ball Joint		
Ball Joint	LED Illuminated Monorail	253
Ball Joint		
Banja	Pendants Low-Voltage	119
Bare Head Apollo Swivei I	Heads	152
Bare Head Swivei I	Heads	151
Bare Head Swivei II	Heads	151
Batons	Suspension	36
Baybridge 3 Light	Suspension	37
Baybridge 5 Light	Suspension	37
Bellboy	Pendants Low-Voltage	132
Belle	Pendants Low-Voltage	132
Big Cuttle	Pendants Line-Voltage	74
Big Jelly	_	
Birdie		
Birdie Grande		
Bling		
Bling	_	
-		
Boardwalk Large		

PRODUCT NAME	SECTION	PAGE
Boardwalk Small	Outdoor	209
Bonn	Pendants Low-Voltage	103
Bora	Wall	175
Briolette	Pendants Low-Voltage	91
Bullé	Pendants Low-Voltage	106
Caroline	Pendants Low-Voltage	127
Casino One	Wall	180
Casino Two	Wall	180
Cato	Suspension	23
Cato	Wall	165
Celeste	Pendants Low-Voltage	128
Chicago Jazz	Suspension	29
Chill	Pendants Low-Voltage	91
Chip Oval 25 Grille	Outdoor	227
Chip Round 25	Outdoor	227
Clay II	Pendants Low-Voltage	100
Clipper/G	Outdoor	225
Coaxial Feeder Cover	2-Circuit Monorail	265
Coaxial Feeder Cover		
Coliseum	Pendants Low-Voltage	114
Cone II		
Cone III		
Constellation	Suspension	35
Crinkle		
Crystal Ball	5	
Cube	3	
Cuttle	9	
Cylia	5	
Cypree Large	3	
Cypree Small	_	
Dahling	_	
Dahling	3	
Dahling Grande		
Daisy	3	
Daisy	3	
Derby		
Derby Rectangular		
Dimensions	•	
Dimensions	3	
Direct Feed Telescoping Rigid Standoffs		
Direct Feed Telescoping Rigid Standoffs		
Direct Feed Telescoping Rigid Standoffs		
Dome-Si Coax		
Dome-S-I-Grande	5	
Dover		
Drop		
Duke	-	
Eclipse		
Eclipse		
Elba		
Elba	•	
Emi		
End Caps	3	
End Caps		
Fiber Optic Cable		
Final Call Medium		
r mar can ivicaram	Pudl	∠∪ I

PRODUCT NAME	SECTION	PAG
Finestra	Pendants Low-Voltage	1
Fiona	Pendants Low-Voltage	
Fiona	Wall	16
Fiona Grande	Suspension	3
Flexible End Power Feed	Monorail	23
Flite Paper	Heads	15
Flow		
Flurry	3	
Flute	5	
Fusion Jack Swag Hook		
Futura		
Gelato		
Geoform Round Cage	3	
Geoform Round Ring		
Geoform Square Cage		
Geoform Square Ring		
Geoform Square Visor		
Glama	•	
Glama	Wall	1
Gypsy	Suspension	
Hollywood Beach	Flush Mounts	
Hollywood Beach	Suspension	
Hollywood Beach	Wall	1
Hollywood Beach Long	Pendants Line-Voltage	
Horizon	Pendants Low-Voltage	
Hover	Pendants Low-Voltage	1
Icicle	5	
lcicle		
lcicle II		
Indulgent	3	
Industrial Large, Modular	3	
Industrial Medium, Modular		
Industrial Small, Modular		
,		1
lsis	, , , , , , , , , , , , , , , , , , ,	
Isla		
Jada		
Jada 5-Light		
Jada 7-Light	Bath	1
Jelly	Pendants Low-Voltage	1
Julep	Pendants Line-Voltage	
Juniper	Pendants Line-Voltage	
Juniper	Wall	1
Kett	Wall	1
Kett 3-Light	Bath	1
Kett 5-Light		
Kits, Pre-Configured Monorail		
Kona II		
Kyia	3	
Large Oval Aluminum Bulkhead		
Large Oval Aluminum Bulkhead With Guard Large Oval Aluminum Bulkhead With Visor		
large Cival Alliminum Bulknead With Visor		
		2
Large Round Aluminum Bulkhead		
	Outdoor	2

PRODUCT NAME	SECTION	PAGE
Lava II	. Pendants Low-Voltage	127
LED End Cap	. LED Illuminated Monorail	251
LED Generator Dual	. LED Illuminated Monorail	251
LED Generator Single	. LED Illuminated Monorail	251
LED Illuminated Wall Monorail Direct Feed Standoff	. LED Illuminated Monorail	253
LED Illuminated Wall Monorail Element Adapter	. Fusion Jack	273
LED Illuminated Wall Monorail Element Adapter	. LED Illuminated Monorail	253
Len Clip, Frost	. Heads	159
Len Clip, Grid	. Heads	159
Len Clip, Stripe	. Heads	159
Lens Clip, Dichroic Blue	. Heads	159
Lens Clip, Dichroic Green	. Heads	159
Lens Clip, Dichroic Red	. Heads	159
Lens Clip, Dichroic Yellow	. Heads	159
Lens, Dichroic Blue	. Heads	159
Lens, Dichroic Green	. Heads	159
Lens, Dichroic Red	. Heads	159
Lens, Dichroic Yellow	. Heads	159
Lens, Diffuser	. Heads	159
Lens, Linear Spread	. Heads	159
Lens, Soft Focus	. Heads	159
Leo	. Pendants Low-Voltage	127
Lily	. Pendants Low-Voltage	109
Linea	. Bath	203
Linear	. Wall	184
Louver Lens Holder		
Low-Voltage Fusion Jack Track Adapter		
Lulu		
Madeleine	3	
Mademoiselle No. 1	3	
Mademoiselle No. 2	3	
Male Fusion Jack		
Mango Coax Nuage	3	
Marmo		
Mason		
Mason Classic	5	
Max		
Mercury, Stingray		
Merlino swivel II		
Metro		
Mia		
Mini-Aiko		
Mini-Birdie		
Mini-Dahling		
Mini-Dome I Swivei I	_	
Mini-Dome II		
Mini-Hollywood Beach	3	
Mini-Indulgent	_	
Mini-Isis Cylinder	_	
Mini-Isis Cylinder	_	
Mini-Isla		
Mini-Jasper	_	
Mini-Lily		
Mini-Mason		
Mini-Monty	_	

# Model Name Index

RODUCT NAME	SECTION	PAGE
Mini-Olivia	Pendants Low-Voltage	9
Mini-Pavia	Pendants Low-Voltage	11
Mini-Rock Candy Accessory	Heads	14
Mini-Rock Candy Cylinder	Pendants Low-Voltage	9
Mini-Rock Candy Cylinder	Wall	17
Mini-Rock Candy Round	Pendants Low-Voltage	9
Mini-Springview	Pendants Low-Voltage	8
Mini-Veneto	Pendants Low-Voltage	13
Mini-Volo	Pendants Low-Voltage	14
Mini-White Zinnia	Pendants Low-Voltage	8
Miss Charlie		
Mistral	•	
Miyu	Pendants Line-Voltage	7
Miyu Classic	3	
Modo	5	
Modo Glass Shield Accessory		
Modo Metal Shield Accessory		
Mojave		
Mojave	3	
Mono-Arc		
Mono-Tel		
Monty	5	
Monty		
Multi-Port Canopy 11 Round Wood		
Multi-Port Canopy 11 Round Wood	•	
Multi-Port Canopy 3 Rectangle		
Multi-Port Canopy 3 Round		
Multi-Port Canopy 4 Square		
Multi-Port Canopy 5 Round		
Multi-Port Canopy 7 Rectangle Wood		
Multi-Port Canopy 7 Rectangle Wood		
Multi-Port Canopy 7 Round	Fusion Jack	27
Neptune I	Pendants Low-Voltage	12
Neutron	Pendants Low-Voltage	11
New York Large, Modular	Outdoor	21
New York Medium, Modular	Outdoor	21
New York Small, Modular	Outdoor	21
Nikko	Outdoor	22
Nikko Grille	Outdoor	22
Nikko Visa	Outdoor	22
Nikko/G	Outdoor	22
Nube Suspension 214	Pendants Line-Voltage	7
Oliver	Wall	16
Oliver 3-Light	Bath	19
Oliver 5-Light	Bath	19
Olivia		
Omni Medium	3	
Omni Small		
Omni With Cover Medium		
Omni With Cover Medium		
Omni With Cover Small		
Omni With Cover Small		
One Wall Canony	VVdII	
Ona Wall Canopy		4.4
Ona Wall Canopy  Onyx Cone  Onyx Cone Accessory	Pendants Low-Voltage	

PRODUCT NAME	SECTION	PAGE
Onyx Cylinder	Wall	176
Onyx Dome		
Onyx Dome	3	
Onyx Teardrop		
Onyx Teardrop	3	
Ooni		
Optional Heads, Twilight	3	
Orbit		
Orbit Swivel I	_	
Palm Lane Large		
Palm Lane Small		
Paperweight		
Pavia		
Pavia		
Perf		
Piattini	5	
Pier 60.	5	
Polo		
Power Feed Canopies		
Power Feed Canopies, Direct		
Power Feed Canopies, Direct		
Power Feed Canopies, Direct		
Power Feed Canopies, Dual-Feed		
Power Feed Canopies, Dual-Feed		
Power Feed Canopies, Dual-Feed		
Power Feed Canopies, LED Illuminated Wall MRL		
Power Feed Canopies, Single-Feed		
Power Feed Canopies, Single-Feed		
Power Feed Canopies, Single-Feed		
Power Feed Canopies, Wall Monorail		
Presidio		
Presidio Wet		
Puck Swivei		
Rachel	_	
Recessed Can Adapter		
Relic No. 1		
Relic No. 2		
Renée I		
Renée II	_	
Rev Swivel		
Rio	_	
Rock Candy Cylinder	_	
Rocket		
Rocks		
Roka		
Roxie	•	
Sam		
Saturn, Stingray		
Seguro	3	
Shield Galleria		
Shield Swivei I		
Showgirl	Pendants Line-Voltage	60
Showtime	Wall	167
Sigma Accessory	Heads	149
Silver Bullet	Pendants Line-Voltage	76
Single-Circuit Element Adapter	Fusion Jack	273

# Model Name Index

PRODUCT NAME	SECTION	PAGE
Small Oval Aluminum Bulkhead	Outdoor	230
Small Oval Aluminum Bulkhead With Guard	Outdoor	230
Small Round Aluminum Bulkhead	Outdoor	230
Soft Curve, 2-Ciruit Monorail	2-Circuit Monorail	262
Soft Curve, Monorail	Monorail	236
Sophia	Pendants Low-Voltage	123
Sophia	Wall	179
Sora	Pendants Line-Voltage	66
Spencer	3	
Springview	Pendants Low-Voltage	87
Stogie I	y .	
Stogie II	y .	
Straight Conductive Connector	y .	
Straight Conductive Connector		
Straight Conductive Connector		
Straight Isolating Connector		
Straight Isolating Connector		
Straight Isolating Connector		
Straight Rail, 2-Circuit Monorail		
Straight Rail, LED Illuminated Monorail		
Straight Rail, Monorail		
Structure Clip		
'		
Structure Louver		
Sulton	3	
Sunkissed		
Sunkissed		
Superdelta Tondo		
Superdelta Tondo Visa		
Suspension Swag Hook	·	
Swing		
Taitu		
Tear Drop		
Tear-Si Coax	y .	
Tear-SII Coax	_	
Telescoping Rigid Standoffs		
Telescoping Rigid Standoffs		
Telescoping Rigid Standoffs		
T-Grid Clip		
T-Grid Clip		
T-Grid Clip	Monorail	239
Top	Wall	181
Top Wall II	Wall	181
Top-Si Coax	Pendants Low-Voltage	123
Transformers, Direct Feed Surface	2-Circuit Monorail	268
Transformers, Direct Feed Surface	LED Illuminated Monorail	257
Transformers, Direct Feed Surface	Monorail	243
Transformers, Remodel Recessed	Monorail	244
Transformers, Remote		
Transformers, Remote	LED Illuminated Monorail	254
Transformers, Remote	Monorail	240
Transformers, Surface	2-Circuit Monorail	268
Transformers, Surface	LED Illuminated Monorail	256
Transformers, Surface	Monorail	242
Tube 1	Pendants Low-Voltage	145
Tube 2	Pendants Low-Voltage	145
Tube 3	Pendants Low-Voltage	145

PRODUCT NAME	SECTION	PAGE
Tubes Seven	Suspension	42
Tubular	Pendants Low-Voltage	137
Tubular Large, Modular	Outdoor	217
Tubular Medium, Modular	Outdoor	217
Tubular Small, Modular	Outdoor	217
Tulip	Wall	185
Twilight 12	Suspension	39
Twilight 20	Suspension	39
Twin Spot Swivel	Heads	157
Twin Tube Bath Installation Kit	Bath	202
Twin Tube Bath Installation Kit Additional Head	Bath	202
Uptown Large	Outdoor	207
Uptown Small	Outdoor	207
Veneto	Flush Mounts	53
Veneto	Suspension	44
Veneto Grande	Flush Mounts	53
Veneto Grande	Suspension	44
Veneto Venti	Flush Mounts	53
Veneto Venti	Suspension	44
Vent	Heads	148
Venus, Stingray	Outdoor	213
Venus, Stingray	Wall	188
Vision	Pendants Low-Voltage	141
Vision	Wall	183
Visir 20	Outdoor	226
Visir 30	Outdoor	226
Volo	Pendants Line-Voltage	76
Vortex	Pendants Low-Voltage	134
Voti Accessory	Heads	149
Wall (Direct End) Power Feed	Monorail	239
Wall Bracket	Monorail	239
Wall Monorail Direct Feed Standoff	Monorail	239
Wall Monorail Element Adapter	Fusion Jack	273
Wall Monorail Element Adapter		
White Zinnia	Pendants Line-Voltage	57
White Zinnia Grande	Pendants Line-Voltage	57
Wilt	Pendants Low-Voltage	115
Wilt	Wall	176
Wilt Bowl	Flush Mounts	51
Zip	Pendants Line-Voltage	63
Zip	Suspension	23
Zip	Wall	164

5107C	230 231 231 231 231 231 231 231 231 231 231	A02(BK,SI)		HE382		HS381	
5108C	230 231 231 231 231 231 231 231 231 231 231	A04(BK,SI)  A05(BK,SI)  A06(BK,SI)  A07(BK,SI)  A08(BK,SI)  ACONNECTOR  ADICMR16BU  ADICMR16GR  ADICMR16TOR  ADICMR16TOR		HE437		HS397	
5120C	231 231 231 231 231 231 231 231 231 231	A05(BK,SI)		HE441		HS399 HS402 HS4412 HS4420 HS446	45 105 39 39
5120C-BZ		A06(BK,SI)		HPARC		HS402 HS4412 HS4420 HS446	
5121C		A07(BK, SI)		HPTEL	191 128 110	HS4412 HS4420 HS446	39 39 118
5121C-BZ	231 231 231 231 231 231 231 231	A08(BK,SI)		HS170 HS171 HS173	110	HS4420 HS446	
5127C		ADICMR16BU	159 159 159	HS171	131		
5128C	231 231 231 231	ADICMR16GRADICMR16RDADICMR16YLALENSMR16DF			131	HC1/17	
5137C	231 231 231 231	ADICMR16RDADICMR16YLALENSMR16DF	159		77	113447	107
5137C-SIZX13HE	231 231 231	ADICMR16YL			//	HS451	
5137C-BZ	231	ALENSMR16DF	159	HS176		HS452	
5137C-BZ2x13HE 5137C-SI 5137C-SI2x13HE 5138C	231			HS177		HS454	
5137C-SI 5137C-SI2x13HE 5138C				HS178		HS455 HS459	
5137C-SI2x13HE 5138C	Z3 I	ALENSMR16LL		HS179		HS461	
5138C		ALHDRMR16(BZ,BK,SI		HS181		HS462	
		ASTRLMR16BK		HS1861		HS463	
5138C2x13HE	231	BI-ADI-		HS1881		HS467	
5140C	230	CK001A-FJ	273	HS194	126	HS469	
5140CBZ	230	CK001B-FJ	272	HS206	36	HS472	107
		CK001B-FJV	272	HS214	76	HS504	119
		CK001I-FJ	272				
5101C DE				· ·			
3107 €							
				HS267	127		
5177C-BZ	229	CK011BD-FJ	40, 274	HS268	133	HS565	95
5177C-BZ42T	229	CLIP-TB/MONO	239, 253, 265	HS269	135	HS574	101
			. , . ,				
DE OD COETTE TITTET			,				
5211CHE	231	FP16	159	HS2931	145	HS603	87
5235CHE	229	FUSIONKIT	245	HS2932	145	HS604	87
5237C-BZHE	229	GB1	40	HS2933	145	HS616	85
	229	GHB295	191	HS298	112	HS621	85
		HANGER-CBL	238, 252, 264	HS337	140	HS72932/1	42
6956HE	225	HANGERDIRADJ	238, 252, 264	HS338	117	HW170	176
	225	HANGERDIRRC	238, 252, 264	HS341	120	HW176	176
		HANGERDIRW	239, 253				
						_	
777658446666611122211112222144442330	7 5160C	7 5160C	7 5160C	7 5160C	7 5160C	7 5160C	S   S   S   S   S   S   S   S   S   S

# Model Number Index

MODEL	PAGE	MODEL	PAGE	MODEL	PAGE	MODEL PAGE	MODEL PAGE
HW332	179	LF184	74	PF399	45	PW637 208	TRANSDIR-SFM75(BZ,SC)243
HW336	183	LF229	77	PF400	44	PW638 208	TRANSDIR-SFM75(BZ,SC)/277 243
HW337		LF236	77		64	PW654163	TRANSDIRSFM75(BZ,SC)-LED 257
HW3783		LF301			71	PW658 165	TRANSDIR-SFM75(BZ,SC)-LED/277 257
HW4601		LF400			77	PW660 164	TRANS-RMTE-150254
HW486		LF489			73	PW663 164	TRANS-RMTE-150M 240, 254
HW496		LF500			76	PW666 169	TRANS-RMTE-150M/277 240, 254
HW545		LF512			69	PW674 201	TRANS-RMTE-150M-2
HW5497 HW5498		LF5180			64	PW681	TRANS-RMTE-300M
HW614		LF5500			70	PW936 185	TRANS-RMTE-300M/24V77240
HW623		LF553		PF582		PW940	TRANS-RMTE-300M/277 240, 254
HW6681		LF566			60	PWAP10	TRANS-RMTE-300M-2
HW6683		LF573			67	PWAP11 186	TRANS-RMTE-301254
HW6685	199	LF576	66	PF595	57	PWAP13 178	TRANS-RMTE-600M 240, 254
HW6691		LF578	70	PF597	57	PWAP14 185	TRANS-RMTE-600M/24240
HW6693	195	LF581	70	PF598	61	PWAP19 184	TRANS-RMTE-600M/24V77240
HW6695	195	LF582	66	PF608	60	RAILADAP-WALL239, 253, 273	TRANS-RMTE-600M/277 240, 254
HW6701	166	LF584	60, 72	PF625	59	RAILCV1236, 262	TRANS-RMTE-600M-2266
HW6705		LF594	67		61	RAILCV2 236, 262	TRANS-RMTE-600M-2/277 266
HW6707		LF595			21	RAILCV3236, 262	TRANS-RMTE-75M254
HW936		LF597		PF643		RAILCVSPRL 236, 262	TRANS-RMTE-75M/277254
HWAP11		LF598			26	RAIL-ST236, 250, 262	TRANS-RRE244
HWAP19		LF608			62	REMOTECNPDIRW-(BZ,SC) 241	TRANS-SFE100-(BZ,SC) 242
ISOCONNECTORCL-M		LF625			23	REMOTECNPDIRW-(BZ,SC)-LED 255	TRANS-SFE100-(BZ,SC)/277 242
ISOCONNECTORCL-M-2		LF627			30	REMOTECNPY -DF-(BZ,SC)241	TRANS-SFE100-(BZ,SC)-LED 256
JC317		LF643			22	REMOTECNPY -DF-(BZ,SC)-LED 255	TRANS-SFE100-(BZ,SC)-LED/277 256
JC318		LF650			23	REMOTECNPY -DF-2C-(BZ,SC) 267	TRANS-SFE150-(BZ,SC)
JC398		LF653			63	REMOTECNPY DIR(BZ,SC) 241	TRANS-SFE150-(BZ,SC)-LED
JC399		LF655			27	REMOTECNPY DIR(BZ,SC)-LED 255	TRANS-SFE300-(BZ,SC)
JC400		LF657			58	REMOTECNPY-(BZ,SC)241	TRANS-SFE300-(BZ,SC)-LED
JC644		LF659			30	REMOTECNPY-(BZ,SC) 2	TRANS-SFE-300-2-(BZ,SC)
JW115		LF664				REMOTECNPY-(BZ,SC)-2C	TRANS-SFE60-(BZ,SC)
JW119		LF676			71	REMOTECNPY-(BZ,SC)-Z-LED	TRANS-SFE61-(BZ,SC)/2//242
JW120		LF677			219	REMOTECNPYDIR(BZ,SC)-2C	TRANS-SFE61-(BZ,SC)/277
JW230		LF680				REMOTECNPYDIR2(BZ,SC)	TRANS-SFM150-(BZ,SC)242
JW483		LF683			217	REMOTECNPYDIRDF(BZ,SC)	TRANS-SFM150-(BZ,SC)-LED
JW484		LF900				REMOTECNPYDIRDF(BZ,SC)-2C 267	TRANS-SFM300-(BZ,SC)
JW556		LF935			181	REMOTECNPYDIRDF2(BZ,SC)-LED 255	TRANS-SFM300-(BZ,SC)/24242
JW559		LN060SI			181	REMOTECNPYDIRF(BZ.SC)-LED 255	TRANS-SFM300-(BZ,SC)/277242
JW561	,	LN120SI	203	PW3783	185	REMOTECNPY-FLEX239	TRANS-SFM300-(BZ,SC)-LED 256
JW564		LW4601	184	PW4601	184	REMOTECNPY-WALL 239	TRANS-SFM300-(BZ,SC)-LED/277 256
JW583	212	LW5497	184	PW483	169	SCONNECTOR237, 251, 263	TRANS-SFM-500-2-(BZ,SC) 268
JW6021	214	LW556	165	PW484	175	SUSP-SWAGHOOK43	TRANS-SFM600-(BZ,SC)242
JW6024	214	LW559	172, 210	PW486	201	TCONNECTOR 237, 263	TRANS-SFM600-(BZ,SC)/24242
JW6026	188, 213	LW583	212	PW496	203	TRANSDIRSFE100(BZ,S)-LED257	TRANS-SFM600-(BZ,SC)/277242
JW612	189, 223	LW622	163	PW527	215	TRANSDIR-SFE100(BZ,SC)243	TRANS-SFM600-(BZ,SC)-LED 256
JW622		LW632			219	TRANSDIR-SFE100(BZ,SC)/277 243	TRANS-SFM600-(BZ,SC)-LED/277 256
JW632		LW639			215	TRANSDIR-SFE100(BZ,SC)-LED/277.257	TRANS-SFM75-(BZ,SC)242
JW635		LW641			219	TRANSDIR-SFE150(BZ,SC) 243	TRANS-SFM75-(BZ,SC)/277242
JW636		LW642			217	TRANSDIRSFE150(BZ,SC)-LED 257	TRANS-SFM75-(BZ,SC)-LED 256
JW637		LW654			217	TRANSDIR-SFE300(BZ,SC) 243	TRANS-SFM75-(BZ,SC)-LED/277 256
JW638		LW658			184	TRANSDIRSFE300(BZ,SC)-2 268	VCONNECTOR 237, 263
JW654		LW660			178	TRANSDIRSFE300(BZ,SC)-LED 257	WB-ADJ239
JW658		LW663				TRANSDIRSFE60(BZ,SC)-LED 257	XCONNECTOR 237, 263
JW660		LW666			172, 210	TRANSDIRSFE60(BZ,SC)-LED/277 257	
JW663		LW681			173, 211	TRANSDIRSFE61(BZ,SC)-LED 257	
JW681		LW682			212	TRANSDIRSFE61(BZ,SC)-LED/277 257	
JW940		PC400			212	TRANSDIR-SFM150(BZ,SC)	
JWAP10		PC400			214	TRANSDIRSFM150(BZ,SC)-LED 257 TRANSDIR-SFM300(BZ,SC)/24 243	
JWAP11		PC651				TRANSDIR-SFM300(BZ,SC)/277243	
JWAP13		PENDADAPMONOFJ			188, 213	TRANSDIR-SFM300(BZ,SC)/277 243	
JWAP14		PF184			189, 223	TRANSDIRSFM300(BZ,SC)-LED/277 . 257	
KHBTWN		PF229				TRANSDIRSFM500(BZ,SC)-2 268	
LC661		PF236				TRANSDIR-SFM600(BZ,SC)	
LEDMRLC		PF318				TRANSDIR-SFM600(BZ,SC)/24V 243	
LEDMRLE		PF319				TRANSDIRSFM600(BZ,SC)-LED 257	
LEDMRLFIBER		PF397			209	TRANSDIRSFM600(BZ,SC)-LED/277 . 257	
ECONNEI (DEN	∠JU		1 J	. *************************************	209		



LBL

7400 Linder Ave Skokie, IL 60077 T 847 626 6300 F 847 626 6350 www.lbllighting.com