

# ASSEMBLING & INSTALLATION INSTRUCTION PRODUCT#8270 8271 8310

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**

## MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two Studs (A) about 1/4" into the pre-drilled holes in the mounting strap spaced the same distance apart as the holes in the fixture canopy (B).
4. Install the mounting strap to the Junction Box with the two Junction Box Screws as shown. The side of the mounting strap marked "GND" must face out.
5. Feed fixture wires through center tube (D). Connecting center part (D), if needed, to part (E) and turn clockwise until firmly tightened.
9. Connecting canopy (B) to part (D) and turn clockwise until firmly tightened.
10. While holding the canopy and lamp cluster towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire connectors are secured. You may have to wrap the connections with electrical tape. If there is a Ground Wire (green or bare copper) in your outlet box, connect the fixture's Ground Wire to it. Otherwise connect fixture's ground wire directly to the mounting strap with the Green Screw provided. After wires being connected, tuck them carefully inside the Junction Box.
11. Then cover the junction box with canopy (B), aligning the Screw of mounting plate with the hole of canopy and lock it with brass ball (C).
12. Place the glass shade (F) onto the socket of the lamp body (E), then lock it securely with the check ring (G).
13. Install the light bulbs in accordance with the fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.**

**Your installation is now complete. Return power to the junction box and test the fixture.**

Fig.1

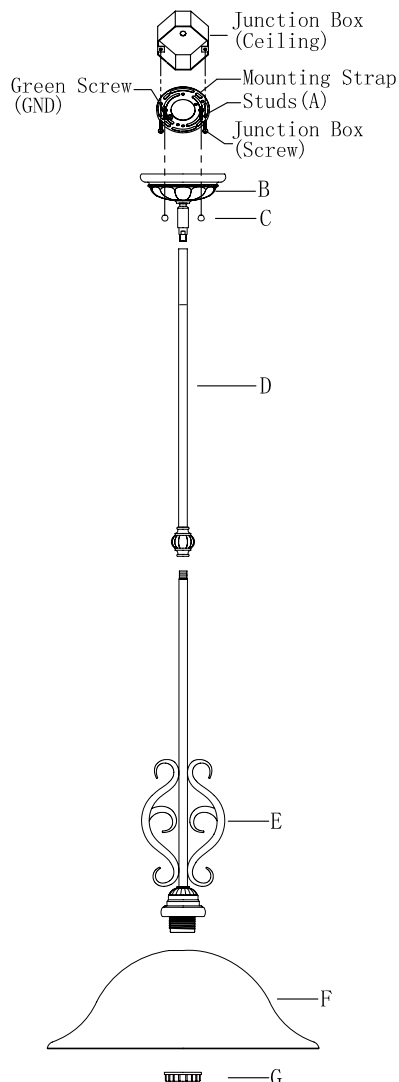


Fig.2

FIXTURE WIRES	HOUSE WIRES	FIXTURE WIRES	HOUSE WIRES	FIXTURE WIRES	HOUSE WIRES
Black or Smooth	Black (Hot)	White or Ribbed	White (Neutral)	Bare Copper (Ground)	Green or Bare Copper (Ground)

**LIVEX®  
LIGHTING**