

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 8531-64

For Wall Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

MOUNTING THE FIXTURE

Installation (see fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.
2. Thread the nipple part way into the center hole of the crossbar and secure with hex nut.
3. Attach the crossbar to the junction box using two junction box screws. The side of the crossbar marked "GND" must face out.
4. Follow wiring instructions carefully (see fig.2)
5. Attach the finial (D) to the bottom center of the fixture body (A) by turning it counter-clockwise until tight.
6. Put the glass shade (H) to the fixture body (A),protrude the pipe nipple (G) through the hole of the glass shade (H),the hex nut (F),and the back plate of the fixture body (A),then lock the pipe nipple (G) with the washer (C),the hex nut (B),and the hex nut (F) until tight.
7. Attach the brass nut (I),the part (J),and the steel part (K) to the glass shade (H),through the pipe nipple (G),then lock then with the ball (L).
8. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the crossbar.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1

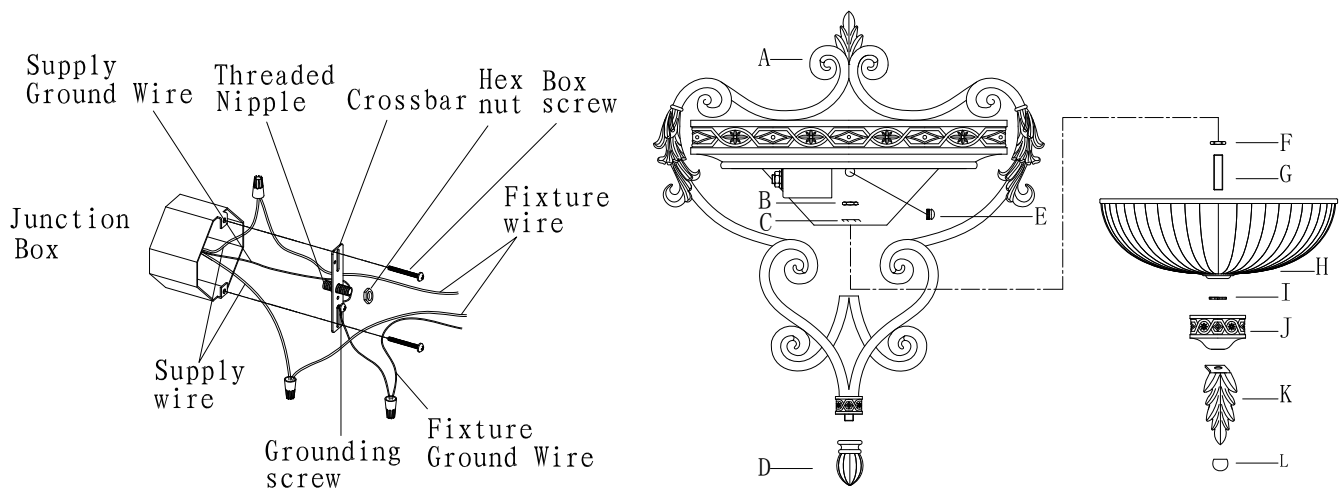


Fig.2

FIXTURE WIRES Black or Smooth		FIXTURE WIRES White or Ribbed		FIXTURE WIRES Bare Copper (Ground)	
HOUSE WIRES		HOUSE WIRES		HOUSE WIRES	
Black (Hot)		White (Neutral)		Green or Bare Copper (Ground)	